

# CA Deliver™

## Installation Guide

Version 12.0



This Documentation, which includes embedded help systems and electronically distributed materials, (hereinafter referred to as the "Documentation") is for your informational purposes only and is subject to change or withdrawal by CA at any time.

This Documentation may not be copied, transferred, reproduced, disclosed, modified or duplicated, in whole or in part, without the prior written consent of CA. This Documentation is confidential and proprietary information of CA and may not be disclosed by you or used for any purpose other than as may be permitted in (i) a separate agreement between you and CA governing your use of the CA software to which the Documentation relates; or (ii) a separate confidentiality agreement between you and CA.

Notwithstanding the foregoing, if you are a licensed user of the software product(s) addressed in the Documentation, you may print or otherwise make available a reasonable number of copies of the Documentation for internal use by you and your employees in connection with that software, provided that all CA copyright notices and legends are affixed to each reproduced copy.

The right to print or otherwise make available copies of the Documentation is limited to the period during which the applicable license for such software remains in full force and effect. Should the license terminate for any reason, it is your responsibility to certify in writing to CA that all copies and partial copies of the Documentation have been returned to CA or destroyed.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CA PROVIDES THIS DOCUMENTATION "AS IS" WITHOUT WARRANTY OF ANY KIND, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NONINFRINGEMENT. IN NO EVENT WILL CA BE LIABLE TO YOU OR ANY THIRD PARTY FOR ANY LOSS OR DAMAGE, DIRECT OR INDIRECT, FROM THE USE OF THIS DOCUMENTATION, INCLUDING WITHOUT LIMITATION, LOST PROFITS, LOST INVESTMENT, BUSINESS INTERRUPTION, GOODWILL, OR LOST DATA, EVEN IF CA IS EXPRESSLY ADVISED IN ADVANCE OF THE POSSIBILITY OF SUCH LOSS OR DAMAGE.

The use of any software product referenced in the Documentation is governed by the applicable license agreement and such license agreement is not modified in any way by the terms of this notice.

The manufacturer of this Documentation is CA.

Provided with "Restricted Rights." Use, duplication or disclosure by the United States Government is subject to the restrictions set forth in FAR Sections 12.212, 52.227-14, and 52.227-19(c)(1) - (2) and DFARS Section 252.227-7014(b)(3), as applicable, or their successors.

Copyright © 2012 CA. All rights reserved. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

## CA Technologies Product References

This document references the following CA Technologies products:

- CA 11®
- CA ACF2™
- CA Common Services
- CA Mainframe Software Manager (CA MSM)
- CA Roscoe®
- CA Top Secret® for z/OS
- CA View™

## Contact CA Technologies

### Contact CA Support

For your convenience, CA Technologies provides one site where you can access the information that you need for your Home Office, Small Business, and Enterprise CA Technologies products. At <http://ca.com/support>, you can access the following resources:

- Online and telephone contact information for technical assistance and customer services
- Information about user communities and forums
- Product and documentation downloads
- CA Support policies and guidelines
- Other helpful resources appropriate for your product

### Providing Feedback About Product Documentation

If you have comments or questions about CA Technologies product documentation, you can send a message to [techpubs@ca.com](mailto:techpubs@ca.com).

To provide feedback about CA Technologies product documentation, complete our short customer survey which is available on the CA Support website at <http://ca.com/docs>.



# Contents

---

## Chapter 1: Overview 11

Audience .....	11
How the Installation Process Works.....	11
Installation Considerations .....	13
First Time Installation or Upgrade.....	14

## Chapter 2: Preparing for Installation 15

Hardware Requirements .....	15
Supported Operating Systems .....	15
CA Deliver Target Libraries.....	15
CA Deliver Distribution Libraries .....	16
EBC Distribution Libraries.....	17
Software Requirements .....	17
Common Component SYSMODs .....	17
CA Deliver Components .....	17
CA Common Services Component .....	18
CA Common Services Requirements .....	18
CA Common Services Installation Considerations.....	18
CAIRIM .....	18
CA LMP .....	19
Library Authorization .....	19
Security Requirements .....	20
Storage Requirements.....	20
Other Requirements.....	20
SVC Dump Data Sets.....	20
JCL Procedures .....	21
Concurrent Releases .....	22
Relationship between Versions of CA View and CA Deliver .....	23

## Chapter 3: Installing Your Product Using CA MSM 25

How to Use CA MSM: Scenarios.....	25
How to Acquire a Product .....	25
How to Install a Product.....	26
How to Maintain Existing Products .....	27
How to Deploy a Product .....	28
How to Configure a Product.....	29

---

Access CA MSM Using the Web-Based Interface .....	30
---	----

## **Chapter 4: Installing Your Product from Pax-Enhanced ESD** **31**

How to Install a Product Using Pax-Enhanced ESD .....	31
How the Pax-Enhanced ESD Download Works .....	33
ESD Product Download Window .....	33
USS Environment Setup .....	36
Allocate and Mount a File System .....	37
Copy the Product Pax Files into Your USS Directory .....	40
Download Using Batch JCL .....	41
Download Files to Mainframe through a PC .....	44
Create a Product Directory from the Pax File .....	45
Sample Job to Execute the Pax Command (Unpackage.txt) .....	46
Copy Installation Files to z/OS Data Sets .....	46
Receive the SMP/E Package .....	47
How to Install Products Using Native SMP/E JCL .....	48
Prepare the SMP/E Environment for Pax Installation .....	48
Run the Installation Jobs for a Pax Installation .....	50
Clean Up the USS Directory .....	51
Apply Maintenance .....	52
HOLDDATA .....	53

## **Chapter 5: Installing Your Product from Tape** **57**

Unload the Sample JCL from Tape .....	58
How to Install Products Using Native SMP/E JCL .....	59
Prepare the SMP/E Environment for Tape Installation .....	59
Run the Installation Jobs for a Tape Installation .....	61
Apply Maintenance .....	62
HOLDDATA .....	63

## **Chapter 6: Installing Your Product from DVD** **67**

Overview .....	67
Purpose .....	67
Audience .....	67
Frequently Asked Questions .....	67
CA Product Documentation .....	70
Introduction to Electronic Software Delivery .....	70
What is Electronic Software Delivery? .....	70
Pax-Enhanced ESD Procedures .....	73
How to Install a Product from a DVD Using Pax-Enhanced ESD .....	73

---

The Installation Procedure .....	73
References.....	77
IBM Reference Manual .....	77
Common USS Commands.....	77

## Chapter 7: Starting Your Product 79

How to Complete Deployment With CA MSM .....	79
How to Complete Configuration With CA MSM.....	79
Authorize Program Load Libraries.....	79
Enter the LMP Code .....	80
Define Security Rules .....	83
Install the ISPF Online Retrieval Option .....	83
Install the TSO Online Retrieval Option .....	89
Install the CA Roscoe Online Retrieval Option .....	90
Install the XMS Online Interfaces (Optional).....	91
How to Configure Without CA MSM .....	91
Step 1: Authorize Program Load Libraries.....	91
Step 2: Enter the LMP Code .....	92
Step 3: Define Security Rules .....	95
Step 4: Create/Update the Database .....	95
Step 5: Create the Initialization Parameter Statements .....	96
Step 6: Modify the Skeleton JCL.....	96
Step 7: Load the Online Panels and JCL Library.....	97
Step 8: Load the Model Banner Pages and Email Format (EFORMAT) members .....	99
Step 9: Add the Start Procedure to PROCLIB .....	100
Step 10: (Optional) Maintain Detail History with JES2.....	101
Step 11: (Optional) Maintain Detail History with JES3.....	103
Step 12: Set Up for Multiple CPUs .....	103
Step 13: (Optional) Construct the Initial Report and Job Data.....	105
Step 14: Set Up the Viewing Interface .....	105
Step 15: (Optional) Install User Exits and Authorization Tables.....	106
Step 16: (Optional) Install Optional Online Interfaces .....	107
Step 17: (Optional) Install Optional Features.....	107

## Chapter 8: Migration Information 109

Migration Considerations.....	109
Upgrading from CA Deliver Release 11.5, Release 11.6, and Release 11.7 .....	109
Installation Steps for Upgrading to Version 12.0 .....	110
Configuration Steps to Upgrade to CA Deliver Version 12.0 without CA MSM .....	111

---

## **Chapter 9: Reverting to a Prior Installation** **115**

Revert to Release 11.7 .....	115
Reverting to Release 11.6 .....	115
Reverting to Release 11.5 .....	116

## **Chapter 10: Installing Online Interfaces** **117**

How to Complete Configuration of the XMS Online Interfaces With CA MSM .....	117
Define Security Requirements .....	117
Install the ISPF/Cross-Memory Online Retrieval Option .....	118
Install the TSO/Cross-Memory Online Retrieval Option .....	125
Install the VTAM Online Retrieval Option .....	127
Install the CA Roscoe/Cross-Memory Online Retrieval Option .....	131
Install the CICS Pseudo-Conversational Option .....	133
Install the IMS Online Retrieval Option .....	141
Optional Initialization Parameter Statements .....	146
How to Configure the Online Interfaces Without CA MSM .....	146
Online Interfaces .....	147
Cross-Memory Services Interface (XMS) .....	147
Cross-Memory Drivers for Interfaces .....	148
Install the ISPF Online Retrieval Option .....	149
Install the TSO Online Retrieval Option .....	155
Install the CA Roscoe Online Retrieval Option .....	155
Install Cross-Memory Services .....	157
Install the ISPF/Cross-Memory Online Retrieval Option .....	176
Install the TSO/Cross-Memory Online Retrieval Option .....	183
Install the VTAM Online Retrieval Option .....	185
Install the CA Roscoe/Cross-Memory Online Retrieval Option .....	189
Install the CICS Pseudo-Conversational Option .....	191
Install the IMS Online Retrieval Option .....	202
TSO, ISPF, CA Roscoe and Cross-Memory Address Spaces .....	206
Multiple Cross-Memory Region Requirements .....	207
Prepare to Start the Cross Memory Task .....	208
Start the Cross Memory Task .....	208

## **Chapter 11: Installing the Features** **209**

Change the Date Format Shown on Panels .....	209
Set Up the CA 11 Interface .....	211
Data Set Attributes .....	211
Data Set Statements .....	212
Syntax of Control Statements in the Data Set .....	212



---

Set Up CA 11 to Run with CA Deliver.....	212
Install the Host Command Environment into CA GSS .....	214

## **Appendix A: Installation Worksheets** **215**

Installation Worksheet .....	215
Step 1: Global Install Parameters .....	215
Step 2: Data Set Qualifiers and SMP Parameters .....	215
Initialization Parameter Worksheet .....	216
Started Task Worksheet .....	219
Initialization Parameter .....	219
Job Name Translation Control .....	219

## **Appendix B: Integration with CA OPS/MVS EMA** **221**

Overview .....	221
Ensure that CA OPS/MVS Is Enabled for Capturing These Events .....	222
CA Deliver Active State Events .....	222
CA Deliver Heartbeat Events .....	224

## **Index** **227**



# Chapter 1: Overview

---

This guide describes how to install and implement CA Deliver.

This section contains the following topics:

[Audience](#) (see page 11)

[How the Installation Process Works](#) (see page 11)

[First Time Installation or Upgrade](#) (see page 14)

## Audience

This guide is targeted to the systems programmer who installs, uses, and maintains CA Deliver.

This guide assumes you are familiar with CA Deliver, CA View, and IBM computer system terms and concepts. You should also have a working knowledge of MVS online facilities such as ISPF, because the CA Deliver panels behave in a similar fashion.

## How the Installation Process Works

CA Technologies has standardized product installations across all mainframe products. Installation uses the following process:

- Acquisition—Transports the software to your z/OS system.
- Installation using SMP/E—Optionally creates a CSI environment and runs the RECEIVE, APPLY and ACCEPT steps. The software is untailored.
- Deployment—Copies the target libraries to another system or LPAR.
- Configuration—Creates customized load modules, bringing the software to an executable state.

CA MSM provides a web-based interface to make the standardized installation process easier. Using CA MSM, someone with limited knowledge of JCL and SMP/E can install a product.

**Note:** If you do not have CA MSM, you can download it from the Download Center at [the CA Support Online website](#). Follow the installation instructions in the CA Mainframe Software Manager documentation bookshelf on the CA Mainframe Software Manager product page. The standardized installation process can also be completed manually.

To install your product, do the following tasks:

1. Prepare for the installation by [confirming that your site meets all installation requirements](#) (see page 15).
2. Use one of the following methods to acquire the product:
  - [Download the software from CSO using CA MSM](#) (see page 25).
  - [Download the software from CSO using Pax-Enhanced Electronic Software Delivery \(ESD\)](#) (see page 31).
  - Order a tape or a DVD.
3. Perform an SMP/E installation using one of the following methods:
  - If you used CA MSM to acquire the product, start the SMP/E step from the SMP/E Environments tab in CA MSM.
  - If you used ESD to acquire the product, you can install the product in the following ways:
    - Install the product manually.
    - Use the Insert New Product option in CA MSM to complete the SMP/E installation.
  - If you used a [tape](#) (see page 57) or DVD, install the product manually.

**Note:** If a CA Recommended Service (CA RS) package is published for your product, install it before continuing with deployment.
4. Deploy the target libraries using one of the following methods:
  - If you are using CA MSM, deployment is required; it is a prerequisite for configuration.
  - If you are using a manual process, deployment is an optional step.

**Note:** Deployment is considered part of [starting your product](#) (see page 79).
5. Configure your product using CA MSM or manually.

**Note:** Configuration is considered part of [starting your product](#) (see page 79).

## Installation Considerations

Before you begin the installation, you must prepare your system, assemble your materials, and then follow the installation steps exactly and in order. Use this list as a guide for the installation process.

1. Be certain that CA Common Services are installed on your system, and that the required hardware, software, and libraries are prepared.

CA Deliver uses the CAI Resource Initialization Manager CAIRIM portion of the CA Common Services. CAIRIM prepares the operating system for CA products and components, and then executes them.

CA DRAS requires the CAIENF (Event Notification Facility) and the CAICCI (Common Communications Interface) components of the CA Common Services.

**Note:** For more information about system requirements, see the chapter "System Requirements".

2. Install CA Deliver using one of these methods:
  - CA MSM
  - PAX Enhanced ESD
  - Product Tape installation
3. Use options and initialization parameters to customize CA Deliver according to the needs of your site, as follows:
  - Configure your CA Deliver system.
  - Install the online interfaces including the cross-memory and online retrieval options for ISPF, TSO, VTAM, CA Roscoe Interactive Environment (CA Roscoe), CICS and IMS.
  - Install the features

**More information:**

[Installing Online Interfaces](#) (see page 117)

[Installing the Features](#) (see page 209)

## First Time Installation or Upgrade

Use the tasks presented in this chapter, and in the Installing Online Interfaces and Installing Features sections of the "Configuring Your Product" chapter. These tasks are valid whether you are installing CA Deliver Version 12.0 for the first time or upgrading from a prior release, as follows:

- If you are installing for the first time, perform:  
All steps in this chapter as indicated, and the tasks in the Installing Online Interfaces and Installing Features chapters to install the optional online interfaces and features appropriate for your site.
- If you are upgrading from a prior release, perform:  
All steps as indicated and the tasks in the "Configuring Your Product," "Installing Online Interfaces" and "Installing Features" chapters as appropriate for your site. Some steps must be performed exactly as presented; several steps must be modified according to the instructions in the Upgrading from a Prior Release section.

*Important! Be sure that you retain your previous CA Deliver JCL files and load libraries.*

# Chapter 2: Preparing for Installation

---

This section describes what you need to know and do before you install the product.

This section contains the following topics:

[Hardware Requirements](#) (see page 15)

[Software Requirements](#) (see page 17)

[CA Common Services Requirements](#) (see page 18)

[Library Authorization](#) (see page 19)

[Security Requirements](#) (see page 20)

[Storage Requirements](#) (see page 20)

[Other Requirements](#) (see page 20)

[Concurrent Releases](#) (see page 22)

[Relationship between Versions of CA View and CA Deliver](#) (see page 23)

## Hardware Requirements

Use the tables in this section to estimate the storage required for the target libraries, the distribution libraries, and the EBC (Extended Base Component) libraries.

## Supported Operating Systems

IBM z/OS 1.9 and higher is the minimum software required to run this release of CA View and meet the performance requirements.

## CA Deliver Target Libraries

This table lists the amount of disk space needed to install the target libraries.

Library Name	Blksize	Tracks	Dir Blks	Description
CAI.CVDEJCL	27920	69	79	Common JCL library
CAI.CVDELOAD	32760	109	81	Common load library
CAI.CVDEPROC	27920	33	32	Common procedure library
CAI.CVDEOPTN	27920	40	40	Common options library
CAI.CVDESRC	27920	39	39	Common source library
CAI.CVDEMAC	27920	53	55	Common macro library

Library Name	Blksize	Tracks	Dir Blks	Description
CAI.CVDECLS0	27920	17	16	Common CLIST library
CAI.CVDEPNL0	27920	33	32	Common ISPF panels library
CAI.CVDETBLO	27920	17	16	Common ISPF table library
CAI.CVDEPENU	27920	69	165	Common online panels (English)
CAI.CVDED133	32718	25	24	Deliver model banner page library
CAI.CVDEXML	32760	54	32	CA MSM Deployment and Configuration Services

**Important!** Do not reblock the libraries listed previously—storage problems might occur.

## CA Deliver Distribution Libraries

This table lists the amount of disk space needed to install the distribution libraries.

Library Name	Blksize	Tracks	Dir Blks	Description
CAI.ABRNJCL	27920	69	79	JCL library
CAI.ABRNMOD	32760	55	73	Load library
CAI.ABRNPROC	27920	33	32	Procedure library
CAI.ABRNOPTN	27920	40	40	Options library
CAI.ABRNSRC	27920	39	39	Source library
CAI.ABRNMAC	27920	53	55	Macro library
CAI.ABRNCLS0	27920	17	16	CLIST library
CAI.ABRNPNL0	27920	33	32	ISPF panels library
CAI.ABRNTBLO	27920	17	16	ISPF table library
CAI.ABRNPENU	27920	69	165	Online panels (English)
CAI.ABRNDATA	32718	25	24	Model banner page library
CAI.ABRNXML	32760	54	32	CA MSM Deployment and Configuration Services



## EBC Distribution Libraries

This table lists the amount of disk space needed to install the EBC distribution libraries.

Library Name	Blksize	Tracks	Dir Blks	Description
CAI.ABROMOD	32760	29	51	Load library
CAI.ABROPROC	27920	33	32	Procedure library
CAI.ABROOPTN	27920	40	40	Options library
CAI.ABROSRC	27920	39	39	Source library
CAI.ABROMAC	27920	53	10	Macro library
CAI.ABROPNL0	27920	33	5	ISPF panels library
CAI.ABROJCL	27920	53	55	JCL library
CAI.ABROXML	32760	54	32	CA MSM Deployment and Configuration Services

## Software Requirements

This section lists the CA Deliver Version 12.0 component SYSMODs.

### Common Component SYSMODs

This table lists the Common Component SYSMOD:

The CBROC00 SYSMOD is the EBC common component.

**Note:** The optional EBC CICS FMID has been incorporated into the EBC common component FMID in Version 12.0.

### CA Deliver Components

This table lists the CA Deliver component SYSMOD:

CBRNC00 is the CA Deliver base product component.

## CA Common Services Component

This table lists the CA Common Services component.

The CAIRIM component supports CA LMP.

## CA Common Services Requirements

We recommend that you maintain CA Common Services at a current maintenance level to ensure compatibility. For the latest information about maintenance requirements, go to CA Support Online.

**Note:** If you intend to use CA MSM for your installation and maintenance tasks, there might be additional CA Common Service requirements. For more information, see the Software Requirements section in the *CA Mainframe Software Manager Product Guide*.

These CA Common Services are used with CA Deliver:

- CAICCI
- CAIRIM
- CA LMP
- CAISDI Service
- CA Health Checker Common Service

**Note:** If other CA products are installed at your site, some of these services might already be installed.

## CA Common Services Installation Considerations

Before you proceed with this installation, be certain that CA Common Services are installed on your machine.

**Note:** For more information, see the *CA Common Services Getting Started Guide*.

## CAIRIM

CAIRIM (CAI Resource Initialization Manager) is the common driver for a collection of dynamic initialization routines that eliminate the need for user SVCs, SMF exits, subsystems, and other installation requirements that are commonly encountered when you install systems software. CAIRIM prepares the operating system for CA products and components, then executes them.

CAIRIM does the following:

- Obtains SMF data
- Verifies proper software installation
- Installs MVS interfaces
- Starts CA and other vendor's products automatically
- Provides proper timing and order of initialization

**Note:** CA Deliver requires CAIRIM to run the required CA LMP.

## CA LMP

The CA License Management Program (CA LMP) tracks licensed software in a standardized and automated way. It uses common, real-time enforcement software to validate the user's configuration. CA LMP reports on activities related to the license, usage, and financials of CA Technologies products.

CA LMP features include the following:

- A Common Key Data Set that can be shared among many CPUs.
- Check digits that are used to detect errors in transcribing key information.
- Execution keys that can be entered without affecting any CA Technologies software products that are already running.
- No special maintenance is required.

CA Deliver is licensed with an LMP key. Acquire the LMP key using one of these methods:

- From your product media
- With ESD
- From CA Support

## Library Authorization

CA Deliver and the EBC subsystem contain authorized programs. To run successfully, these programs must be executed from an authorized library. We recommend that you authorize the CAI Common Load Library (CVDELOAD).

**Note:** If other CA products have been installed, CVDELOAD may already be authorized.

To authorize the CVDELOAD library, modify the appropriate member PROGxx in SYS1.PARMLIB to add an entry for CVDELOAD as follows:

```
APF ADD DSNAME(CAI.CVDELOAD) VOLUME(xxxxxx)
```

where CAI.CVDELOAD is the data set name for the CAI Common Load Library, and xxxxxx is the volume serial number on which it resides. Use MVS system command SET PROG=xx to activate update to PROGxx.

## Security Requirements

For security requirements related to the ability to access data within the CA Deliver database, see the "Security" chapter in the CA Deliver Reference Guide.

## Storage Requirements

Ensure that you have the following storage available:

- If you are installing with ESD, 80 cylinders for the downloaded files.
- For installation and setup:
  - Installation = 100 cylinders
  - SMP/E temporary libraries = 10 cylinders]

## Other Requirements

This section describes SVC Dumps and JCL procedures:

### SVC Dump Data Sets

CA Deliver issues SVC dumps (SDUMP) for certain types of abends. These dumps are written to the MVS SYS1.DUMPnn. data sets. Contact your systems programmer to verify that the data sets are allocated with at least 100 cylinders.

### Dump Analysis and Elimination

The SDUMP program supports MVS dump analysis and elimination processing. This MVS feature eliminates the possibility that duplicate SVC dumps might be written to the SYS1.DUMPnn. data sets.

To use this MVS feature, the SYS1.DAE data set must be allocated and the following parameter members must be updated in SYS1.PARMLIB:

```
IEACMDxx  
SET DAE = xx
```

where xx identifies the ADYSETxx. member

```
ADYSETxx  
DAE=START,RECORDS(sss),SVCDUMP(MATCH,UPDATE,SUPPRESS)
```

where sss is the number of records in SYS1.DAE.

## System Dump Parameters

CA Deliver allocates storage from MVS subpool 230.

For this storage area to be dumped correctly, the IEADMRxx. member in SYS1.PARMLIB should contain the SDATA RGN parameter:

```
SDATA=(... ,RGN,...)
```

The IEADMPxx. member in SYS1.PARMLIB should contain the SDATA LSQA parameter:

```
SDATA=(... ,LSQA,...)
```

**Important!** If these dump parameters are not specified as shown in the previous example, certain storage areas might be missing from dumps, which can hinder support efforts.

## JCL Procedures

During product installation, the procedures are copied into CBRNPROC, the CAI Common Procedure Library. These procedures are used later during normal execution of CA Deliver.

We recommend that you add the CVDEPROC library to the system PROCLIB concatenation.

## Concurrent Releases

You can install this release of CA Deliver and continue to use an older release in another SMP/E CSI environment. If you plan to continue to run a previous release, consider the following points:


- When installing into an existing SMP/E environment, this installation deletes previous releases in that environment.
- If you acquired your product from tape or with Pax-Enhanced ESD, select different target and distribution zones for your new release from where your current release is installed. The new zones use different libraries than your current release.

**Note:** CA MSM installs into a new CSI by default.

- Define DDDEF entries in your new zones to point SMP/E to the proper libraries for installation. Ensure that they point to the new release libraries.

## Relationship between Versions of CA View and CA Deliver

This diagram shows the relationship between multiple versions of CA View and CA Deliver:

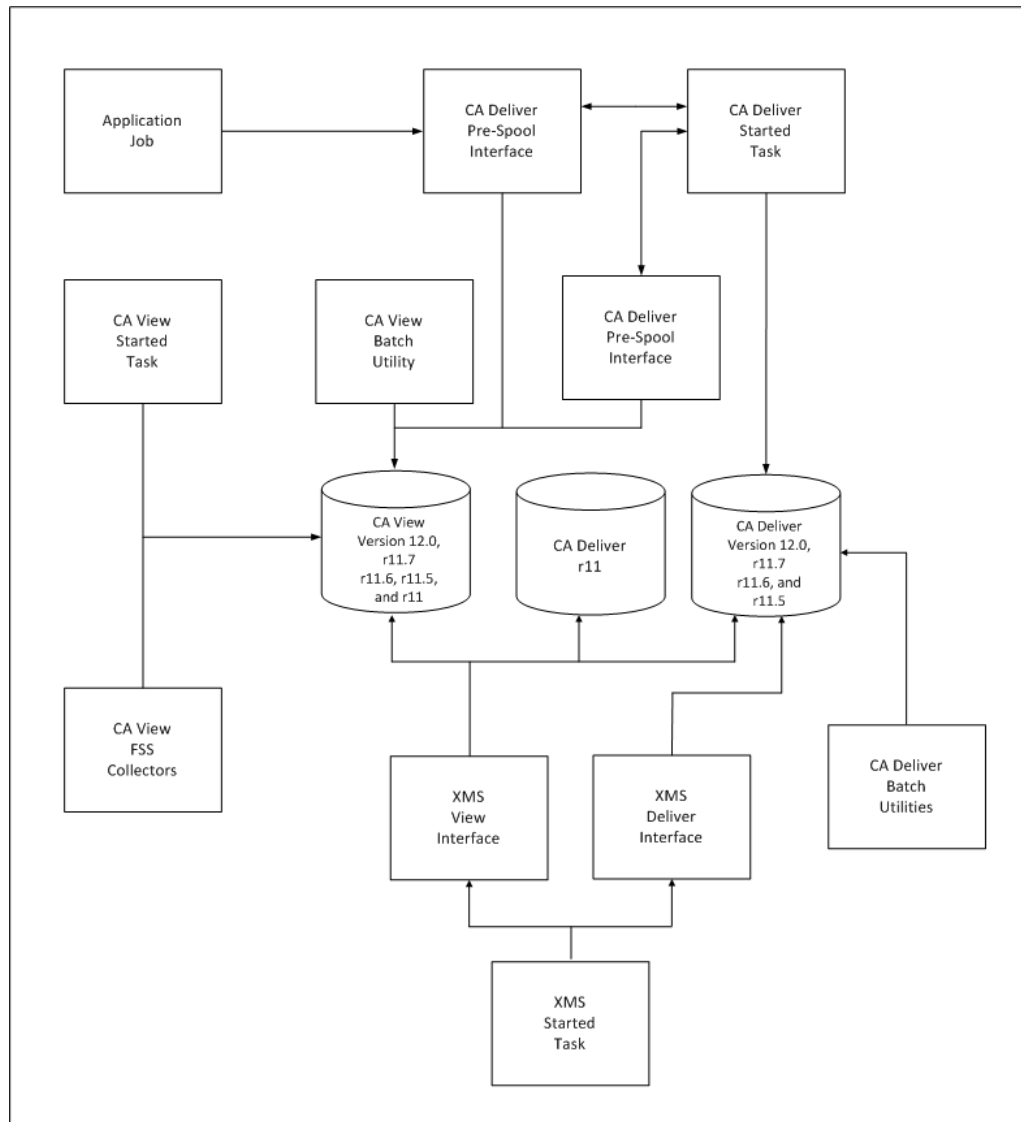





# Chapter 3: Installing Your Product Using CA MSM

---

These topics provide information to get you started managing your product using CA MSM. You can use the online help included in CA MSM to get additional information.

Before using these topics, you must already have CA MSM installed at your site. If you do not have CA MSM installed, you can download it from the Download Center at [the CA Support Online website](#), which also contains links to the complete documentation for CA MSM.

**Note:** The information in this section applies to the latest version of CA MSM. If you are using an earlier version, see the appropriate bookshelf on the CA Mainframe Software Manager product page.

## How to Use CA MSM: Scenarios

Imagine that your organization has started using CA MSM to simplify the installation of CA Technologies products and unify their management. You have also licensed a new CA Technologies product. In addition, you have a number of existing CSIs from previously installed CA Technologies products.

You can use the following scenarios to guide you through the process:

1. [Acquire the new product](#) (see page 25).
2. [Install the new product](#) (see page 26).
3. [Maintain products already installed in your environment](#) (see page 27).
4. [Deploy the product to your target systems](#) (see page 28).
5. [Configure the deployed product to your target systems](#) (see page 29).

## How to Acquire a Product

The *Product Acquisition Service (PAS)* facilitates the acquisition of mainframe products and the service for those products, such as program temporary fixes (PTFs). The PAS retrieves information about products to which your site is entitled. Then it records these entitlements in a software inventory that is maintained on your driving system.

You can use the PAS component of CA MSM to acquire a CA Technologies product.

**Follow these steps:**

1. Set up a CA Support Online account.

To use CA MSM to acquire or download a product, you must have a CA Support Online account. If you do not have an account, you can create one on [the CA Support Online website](#).

2. Determine the CA MSM URL for your site.

To [access CA MSM](#) (see page 30), you require its URL. You can get the URL from your site's CA MSM administrator and log in using your z/OS credentials. When you log in for the first time, you are prompted to create a CA MSM account with your credentials for [the CA Support Online website](#). This account enables you to download product packages.

3. Log in to CA MSM and go to the Software Catalog page to locate the product that you want to manage.

After you log in to CA MSM, you can see the products to which your organization is entitled on the Software Catalog tab.

If you cannot find the product you want to acquire, update the catalog. CA MSM refreshes the catalog through [the CA Support Online website](#) using the site IDs associated with your credentials for [the CA Support Online website](#).

4. Download the product installation packages.

After you find your product in the catalog, you can download the product installation packages.

CA MSM downloads (acquires) the packages (including any maintenance packages) from the CA FTP site.

After the acquisition process completes, the product is ready for you to install or maintain.

## How to Install a Product

The *Software Installation Service (SIS)* facilitates the installation and maintenance of mainframe products in the software inventory of the driving system. This facilitation includes browsing downloaded software packages, managing SMP/E consolidated software inventories on the driving system, and automating installation tasks.

You can use the SIS component of CA MSM to install a CA Technologies product.

**Follow these steps:**

1. Initiate product installation and review product information.
2. Select an installation type.
3. Review installation prerequisites if any are presented.

4. Take *one* of the following steps to select an SMP/E environment:
  - Create an SMP/E environment:
    - a. Set up the global zone.
    - b. Create a target zone.
    - c. Create a distribution zone.
  - Use an existing SMP/E environment from your working set:
    - a. Update the global zone.
    - b. Set up the target zone: Either create a target zone or use an existing target zone.
    - c. Set up the distribution zone: Either create a distribution zone or use an existing distribution zone.
- Note:** If you install a product or its components into an existing target or distribution zone, older versions are deleted from the zone and associated data sets. We recommend that you use new target and distribution zones for this installation so that you can apply maintenance to your current release, if necessary.
5. Review the installation summary and start the installation.

After the installation process completes, check for and install available product maintenance. The product is ready for you to deploy. Sometimes there are other steps to perform manually outside of CA MSM before beginning the deployment process.

## How to Maintain Existing Products

If you have existing CSIs, you can bring those CSIs into CA MSM so that you can maintain all your installed products in a unified way from a single web-based interface.

You can use the PAS and SIS to maintain a CA Technologies product.

### Follow these steps:

1. Migrate the CSI to CA MSM to maintain an existing CSI in CA MSM.

During the migration, CA MSM stores information about the CSI in the database.
2. Download the latest maintenance for the installed product releases from the Software Catalog tab.

If you cannot find a release (for example, because the release is old), you can add the release to the catalog manually and then update the release to download the maintenance.

3. Apply the maintenance.

**Note:** You can also install maintenance to a particular CSI from the SMP/E Environments tab.

After the maintenance process completes, the product is ready for you to deploy. You may have to perform other steps manually outside of CA MSM before beginning the deployment process.

## How to Deploy a Product

The *Software Deployment Service (SDS)* facilitates the mainframe product deployment from the software inventory of the driving system to the target system. This facilitation includes deploying installed products that are policy-driven with a set of appropriate transport mechanisms across a known topology.

You can use the SDS component of CA MSM to deploy a CA Technologies product that you have already acquired and installed.

### Follow these steps:

1. Set up the system registry:
  - a. Determine the systems you have at your enterprise.
  - b. Set up remote credentials for those systems.
  - c. Set up the target systems (non-sysplex, sysplex or monoplex, shared DASD cluster, and staging), and validate them.
  - d. Add network information, including data destination information, to each system registry entry.

2. Set up methodologies.

3. Create the deployment, which includes completing each step in the New Deployment wizard.

After creating the deployment, you can save it and change it later by adding and editing systems, products, custom data sets, and methodologies, or you can deploy directly from the wizard.

**Note:** If you must deploy other products to the previously defined systems using the same methodologies, you must create a separate deployment.

4. Deploy the product, which includes taking a snapshot, transmitting to target, and deploying (unpacking) to your mainframe environment.

After the deployment process completes, the product is ready for you to configure. You may have to perform other steps manually outside of CA MSM before beginning the configuration process.

**More information:**

[How to Complete Deployment With CA MSM](#) (see page 79)

## How to Configure a Product

The *Software Configuration Service (SCS)* facilitates the mainframe product configuration from the software inventory of the driving system to targeted z/OS operating systems.

You can use the SCS component of CA MSM to configure a CA Technologies product that you have already acquired, installed, and deployed.

**Follow these steps:**

1. Select a deployed product to configure from the Deployments tab to open the Create Configuration wizard.
2. Create the configuration, which includes completing each step in the Create Configuration wizard, including the following:
  - a. Define a configuration name and select a target system.
  - b. Select configuration functions and options.
  - c. Define system preferences.
  - d. Create target settings.
  - e. Select and edit resources.
3. Build the configuration. The last step of the Create Configuration wizard lets you build the configuration.
4. Implement the configuration. The implementation process in CA MSM is a step-by-step process that carefully guides you and provides detailed instructions to start, stop, and manage the steps of the implementation process.

After the configuration process completes, the product is ready for you to use. You may have to perform other steps manually outside of CA MSM.

**Note:** You cannot use CA MSM to configure a product to a staging system.

**More information:**

[How to Complete Configuration With CA MSM](#) (see page 79)

## Access CA MSM Using the Web-Based Interface

You access CA MSM using the web-based interface. Obtain the URL of CA MSM from the CA MSM administrator.

**Follow these steps:**

1. Start your web browser, and enter the access URL.

The login page appears.

**Note:** If the Notice and Consent Banner appears, read and confirm the provided information.

2. Enter your z/OS login user name and password, and click the Log in button.

The initial page appears. If you log in for the first time, you are prompted to define your account on [the CA Support Online website](#).

**Note:** For more information about the interface, click the online help link at the top right corner of the page.

3. Click New.

You are prompted for the credentials to use on [the CA Support Online website](#).

**Important!** The account to which the credentials apply *must* have the Product Display Options set to BRANDED PRODUCTS. You can view and update your account preferences by logging into [the CA Support Online website](#) and clicking My Account. If you do not have the correct setting, you are not able to use CA MSM to download product information and packages.

4. Specify the credentials, click OK, and then click Next.

You are prompted to review your user settings.

**Note:** These settings are available on the User Settings page.

5. Change the settings or keep the defaults, and then click Finish.

A dialog shows the progress of the configuration task. You can click Show Results to view the details of the actions in a finished task.

**Important!** If your site uses proxies, review your proxy credentials on the User Settings, Software Acquisition page.

# Chapter 4: Installing Your Product from Pax-Enhanced ESD

---

This section contains the following topics:

[How to Install a Product Using Pax-Enhanced ESD](#) (see page 31)

[Allocate and Mount a File System](#) (see page 37)

[Copy the Product Pax Files into Your USS Directory](#) (see page 40)

[Create a Product Directory from the Pax File](#) (see page 45)

[Copy Installation Files to z/OS Data Sets](#) (see page 46)

[Receive the SMP/E Package](#) (see page 47)

[Clean Up the USS Directory](#) (see page 51)

[Apply Maintenance](#) (see page 52)

## How to Install a Product Using Pax-Enhanced ESD

This section describes the Pax-Enhanced ESD process. We recommend that you read this overview and follow the entire procedure the first time you complete a Pax-Enhanced ESD installation. For experienced UNIX users, the *Pax-Enhanced ESD Quick Reference Guide* has sufficient information for subsequent installations.

**Important!** Downloading pax files for the SMP/E installation as part of the Pax-Enhanced ESD process requires write authority to the UNIX System Services (USS) directories used for the ESD process.

If you prefer not to involve all CA Technologies product installers with z/OS UNIX System Services, assign a group familiar with USS to perform Steps 1 through 4 and provide the list of the unpacked MVS data sets to the product installer. USS is not required for the actual SMP/E RECEIVE of the product or for any of the remaining installation steps.

To install files using Pax-Enhanced ESD, use the following process:

1. Allocate and mount the file system. This process requires a USS directory to receive the pax file and to perform the unpack steps. We recommend that you allocate and mount a file system dedicated to Pax-Enhanced ESD and create the directory in this file system. Ensure that all users who will be working with pax files have write authority to the directory.

2. Copy the product pax files into your USS directory. To download files, choose one of the following options:

- Download a zip file from CA Support Online to your PC, unzip the file, and then upload the product pax files to your USS file system.
- FTP the pax files from CA Support Online directly to your USS directory.

**Note:** Perform Steps 3 through 6 for each pax file that you upload to your USS directory.

3. Create a product directory from the pax file. Set the current working directory to the directory containing the pax file, and create a new directory in your USS directory by entering the following command:

```
pax -rvf pax-filename
```

4. Use the SMP/E GIMUNZIP utility to create z/OS installation data sets. The file UNZIPJCL in the directory created by the pax command in Step 3 contains a sample job to GIMUNZIP the installation package. Edit and submit the UNZIPJCL job.
5. Receive the SMP/E package. For this step, use the data sets created by GIMUNZIP in Step 4. Perform a standard SMP/E RECEIVE using the SMPPTFIN and SMPHOLD (if applicable) DASD data sets. Also, specify the high-level qualifier for the RELFILES on the RFPREFIX parameter of the RECEIVE command.
6. Proceed with product installation. Consult product-specific documentation, including AREADME files and installation notes to complete the product installation.
7. (Optional) Clean up the USS directory. Delete the pax file, the directory created by the pax command, all of the files in it, and the SMP/E RELFILES, SMPMCS, and HOLDDATA data sets.

**More Information:**

[USS Environment Setup](#) (see page 36)

[Allocate and Mount a File System](#) (see page 37)

[Copy the Product Pax Files into Your USS Directory](#) (see page 40)

[Create a Product Directory from the Pax File](#) (see page 45)

[Copy Installation Files to z/OS Data Sets](#) (see page 46)

[Receive the SMP/E Package](#) (see page 47)



## How the Pax-Enhanced ESD Download Works

**Important!** To download pax files for the SMP/E installation as part of the Pax-Enhanced ESD process, you must have write authority to the UNIX System Services (USS) directories used for the ESD process and available USS file space before you start the procedures in this guide.

Use the following process to download files using Pax-Enhanced ESD:

1. Log in to <https://support.ca.com/>, and click Download Center.

The CA Support Online web page appears.

2. Under Download Center, select Products from the first drop-down list, and specify the product, release, and genlevel (if applicable), and click Go.

The CA Product Download window appears.

3. Download an entire CA Technologies product software package or individual pax files to your PC or mainframe. If you download a zip file, you must unzip it before continuing.

For both options, [The ESD Product Download Window](#) (see page 33) topic explains how the download interface works.

**Note:** For traditional installation downloads, see the *Traditional ESD User Guide*. Go to <https://support.ca.com/>, log in, and click Download Center. A link to the guide appears under the Download Help heading.

4. Perform the steps to install the product based on the product-specific steps.

The product is installed on the mainframe.

## ESD Product Download Window

CA Technologies product ESD packages can be downloaded multiple ways. Your choices depend on the size of the individual files and the number of files you want to download. You can download the complete product with all components or you can select individual pax and documentation files for your product or component.

The following illustration shows sample product files. It lists all components of the product. You can use the Download Cart by checking one or more components that you need or check the box for Add All to cart. If you prefer to immediately download a component, click the Download link.

### CA Earl - MVS

- [Pax Enhanced Electronic Software Delivery \(ESD\) Guide](#)
- [Pax Enhanced Electronic Software Delivery \(ESD\) Quick Reference Guide](#)
- [Traditional Electronic Software Delivery \(ESD\) Guide](#)
- [Learn more about Using pkzip with your Downloaded Mainframe Products](#)
- [Learn more about downloading components of CA product](#)
- [Mounting ISO Images with OpenVMS](#)

If you have comments or suggestions about CA product documentation, send a message to [techpubs@ca.com](mailto:techpubs@ca.com).

**Note:** Related Published Solutions are available on the other results tab on this page. You must add these solutions to your Download Cart to include them with your product files for download.

[View Download Cart](#)

				<input type="checkbox"/> Add All to cart	
Product Components				Add to cart	Download
<b>CCS - LEGACY - ESD ONLY</b> 140000AW030.pax.Z	14.0 /0000	07/06/2011	4.89MB	<input type="checkbox"/>	<a href="#">Download</a>
<b>CCS - MFNSM - ESD ONLY</b> 140000AW040.pax.Z	14.0 /0000	07/06/2011	202.01MB	<input type="checkbox"/>	<a href="#">Download</a>
<b>CCS - BASE - ESD ONLY</b> 140001AW010.pax.Z	14.1 /0000	06/05/2012	27.44MB	<input type="checkbox"/>	<a href="#">Download</a>
<b>CCS - OPTIONAL - ESD ONLY</b> 140001AW020.pax.Z	14.1 /0000	06/05/2012	14.49MB	<input type="checkbox"/>	<a href="#">Download</a>
<b>CA EARL PRODUCT PACKAGE</b> 610106AEO00.pax.Z	6.1 /0106	10/30/2008	1.85MB	<input type="checkbox"/>	<a href="#">Download</a>
<b>EARL PIPPACK</b> AEO61010600.pdf	6.1 /0106	01/29/2010	93.92KB	<input type="checkbox"/>	<a href="#">Download</a>
<b>CA EASYTRIEVE PRODUCT PACKAGE</b> B60000ESA00.pax.Z	11.6 /0000	07/05/2011	6.12MB	<input type="checkbox"/>	<a href="#">Download</a>
<b>DATACOM/AD PROD INFO PACKET</b> CAIE00000P0.pdf	14.0 /0000	06/01/2012	220.53KB	<input type="checkbox"/>	<a href="#">Download</a>
<b>DATACOM/AD XPRESS INSTALL</b>				<input type="checkbox"/>	<a href="#">Download</a>

Clicking the link for an individual component takes you to the Download Method page.

## Download Method

---

Please choose a download method to complete your download request. [Learn More](#)

---

### HTTP via Download Manager


This is the CA recommended method for download. The Download Manager allows you to download your files faster and more efficiently.

[Download](#)

---

### HTTP via Internet Browser

If Download Manager cannot be used or fails to start you may access your file(s) via your internet browser.

[View File Link\(s\)](#) 

---

### FTP

This method allows you to download your file(s) via FTP from CA's content delivery network or via native FTP servers.

**Note:** Processing is required and an email notification will be sent when your request is ready for downloading.

[FTP Request](#)

Depending on the size and quantity of product files ordered, the Download Method screen could also have these options:

**Note:** For mainframe downloads using this HTTP method, click the Learn More link.

## Download Method

---

Please choose a download method to complete your download request. [Learn More](#)

---

### HTTP via Download Manager

This is the CA recommended method for download. The Download Manager allows you to download your files faster and more efficiently.

[Download](#)

---

### Create a Zip File

This method allows you to bundle your download files into one or more zip files of up to 3.5 GB each. These zip files can then be downloaded via HTTP or FTP.

**Note:** Processing is required and an email notification will be sent when your request is ready for downloading.

[Create Zip](#)

The HTTP method lets you start downloading immediately. The FTP method takes you to the Review Orders page that displays your order, first in a Pending status changing to Ready when your order has been processed.

Preferred FTP uses the new content delivery network (CDN). Alternate FTP uses the CA Technologies New York-based FTP servers.

The Create a Zip File option first creates the zip, and when ready, offers the options shown by the Zip Download Request examples in the next screen.

### Review Download Requests

Below is a list of the FTP and large HTTP downloads that have been requested by your site. When status is set to **'Ready'** a link will appear.

- For FTP requests, click on the FTP link to view the path information for your download. For more information view our [FTP Help document](#)
- For HTTP requests, click on the HTTP link to initiate your download.
- To view the details of your request, click on the desired order number.

#### Today's Downloads

Order #	Status	Description	Date Placed	Download Options
<a href="#">10000961</a>	Ready	FTP Download Request	04/30/2010	<a href="#">Preferred FTP</a> ▼   <a href="#">Alternate FTP</a> ▼

#### Previous 6 day Download History

Order #	Status	Description	Date Placed	Download Options
<a href="#">10000949</a>	Ready	ZIP Download Request	04/29/2010	<a href="#">HTTP via DLM</a>   <a href="#">Preferred FTP</a> ▼   <a href="#">Alternate FTP</a> ▼
<a href="#">10000948</a>	Ready	ZIP Download Request	04/29/2010	<a href="#">HTTP via DLM</a>   <a href="#">Preferred FTP</a> ▼   <a href="#">Alternate FTP</a> ▼

## USS Environment Setup

You need a UNIX System Services (USS) directory and a file system with adequate space to perform the following tasks:

- Receive product pax files from CA Support Online.
- Perform utility functions to unpack the pax file into MVS data sets that you can use to complete the product installation.

We recommend that you allocate and mount a file system dedicated to Pax-Enhanced ESD. The amount of space that you need for the file system depends on the following variables:

- The size of the pax files that you intend to download.
- Whether you plan to keep the pax files after unpacking them. We do not recommend this practice.

We recommend that you use one directory for downloading and unpacking pax files. Reusing the same directory minimizes USS setup. You need to complete the USS setup only one time. You reuse the same directory for subsequent downloads. Alternatively, you can create a new directory for each pax download.

**Important!** Downloading pax files for the SMP/E installation as part of the Pax-Enhanced ESD process requires write authority to the UNIX System Services (USS) directories used for the ESD process. In the file system that contains the ESD directories, you also need free space approximately 3.5 times the pax file size to download the pax file and unpack its contents. For example, to download and unpack a 14 MB pax file, you need approximately 49 MB of free space in the file system hosting your ESD directory.

## Allocate and Mount a File System

You can use the zSeries File System (zFS) or hierarchical file system (HFS) for ESD downloads.

This procedure describes how to perform the following tasks:

- Allocate a zFS or an HFS.
- Create a mount point in an existing maintenance USS directory of your choice.
- Mount the file system on the newly created mount point.

**Note:** You must have SUPERUSER authority to do this.

- Optionally, permit write access to anyone in the same group as the person who created the directory.

**Important!** USS commands are case-sensitive.

**Follow these steps:**

1. Allocate the file system by customizing one of the following samples to your site's requirements:

- On a zFS, use the following sample:

```
//DEFINE EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//AMSDUMP DD SYSOUT=*
//SYSIN DD *
  DEFINE CLUSTER ( +
    NAME(your_zFS_dataset_name) +
    STORAGECLASS(class) +
    LINEAR +
    CYL(primary secondary) +
    SHAREOPTIONS(3,3) +
  )
/*
//FORMAT EXEC PGM=IOEAGFMT,REGION=0M,
// PARM=(' -aggregate your_zFS_dataset_name -compat')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//STDOUT DD SYSOUT=*
//STDERR DD SYSOUT=*
//CEEDUMP DD SYSOUT=*
/*
```

- On an HFS, use the following sample:

```
//ALCHFS EXEC PGM=IEFBR14
//CAESD DD DSN=yourHFS_dataset_name,
// DISP=(NEW,CATLG,DELETE),UNIT=3390,
// DSN TYPE=HFS,SPACE=(CYL,(primary,secondary,1))
```

The file system is allocated.

**Note:** Ensure that the zFS or HFS data set name that you use conforms to your data set naming conventions for USS file systems. If the allocation of the file system data set fails, it is because of environmental settings not allowing for the allocation. On an HFS, try using the ISPF 3.2 Data Set Utility to allocate your HFS data set.

2. Create a mount point for the file system. This example shows how to create a /CA/CAESD directory in an existing directory, /u/maint. From the TSO OMVS shell, enter the following commands:

```
cd /u/maint/  
mkdir CA  
cd CA  
mkdir CAESD
```

**Note:** This document refers to this structure as *yourUSSESDdirectory*.

The mount point is created.

3. Mount the file system by customizing one of the following samples to your site's requirements:

- On a zFS, use the following sample:

```
MOUNT FILESYSTEM('your_zFS_dataset_name')  
      MOUNTPOINT('yourUSSESDdirectory')  
      TYPE(ZFS)  MODE(RDWR)  
      PARM(AGGROW)
```

- On an HFS, use the following sample:

```
MOUNT FILESYSTEM('your_HFS_dataset_name')  
      MOUNTPOINT('yourUSSESDdirectory')  
      TYPE(HFS)  MODE(RDWR)
```

The file system is mounted.

4. (Optional) Set security permissions for the directory. You can use the chmod command to let other users access the ESD directory and its files. For example, to allow write access to the ESD directory for other users in your USS group, from the TSO OMVS shell, enter the following command:

```
chmod -R 775 /yourUSSESDdirectory/
```

Write access is granted.

**Note:** For more information about the chmod command, see the IBM *z/OS UNIX System Services User Guide* (SA22-7802).

## Copy the Product Pax Files into Your USS Directory

To begin the CA Technologies product installation procedure, copy the product's pax file into the USS directory you set up. Use one of the following methods:

- Download the product pax files directly from the CA Support Online FTP server to your z/OS system.
- Download the product pax file from the CA Support Online FTP server to your PC, and upload it to your z/OS system.
- Download the product file from CA Support Online to your PC. If your download included a zip file, unzip the file, and upload the unzipped pax files to your z/OS system.

This section includes a sample batch job to download a product pax file from the CA Support Online FTP server directly to a USS directory on your z/OS system and sample commands to upload a pax file from your PC to a USS directory on your z/OS system.

**Important!** The FTP procedures vary due to local firewall and other security settings. Consult your local network administrators to determine the appropriate FTP procedure to use at your site.

Ensure that sufficient free space is available in the USS file system you are using for Pax-Enhanced ESD to hold the product pax file. If you do not have sufficient free space, error messages similar to the following appear:

```
EZA1490I Error writing to data set  
EZA2606W File I/O error 133
```

When the download finishes, the pax file size in your USS directory matches the value in the Size column for the corresponding pax file on the CA Technologies Products Download window.

### More Information:

[How the Pax-Enhanced ESD Download Works](#) (see page 33)  
[ESD Product Download Window](#) (see page 33)



## Download Using Batch JCL

Use this process to download a pax file from the CA Support Product Downloads window by running batch JCL on the mainframe. Use the sample JCL attached to the PDF file as CAtoMainframe.txt to perform the download.

**Important!** To simplify the Pax-Enhanced ESD process, the PDF version of this guide includes a sample JCL job that you can copy directly to the mainframe. To access this job, click the paper clip icon at the left of the PDF reader. A window displaying attachments opens. Double-click the file to view the sample JCL.

**Note:** We recommend that you follow the preferred method as described on CA Support Online. This procedure is our preferred download method; however, we do include the procedure to download to the mainframe through a PC in the next section.

### Follow these steps:

1. Supply a valid JOB statement.
2. Replace *yourTCPIP.PROFILE.dataset* with the name of the TCP/IP profile data set for your system. Consult your local network administrators, if necessary.  
The job points to your profile.
3. Replace *YourEmailAddress* with your email address.  
The job points to your email address.
4. Replace *yourUSSESDdirectory* with the name of the USS directory that you use for ESD downloads.  
The job points to your USS directory.
5. Locate the product component to download on the CA Support Product Download window.  
You have identified the product component to download.
6. Click Download for the applicable file.  
**Note:** For multiple downloads, add files to a cart.  
The Download Method window opens.
7. Click FTP Request.  
The Review Download Requests window displays any files that you have requested to download.

**Note:** We send you an email when the file is ready to download or a link appears in this window when the file is available.

8. Select one of the following methods:

**Preferred FTP**

Uses CA Technologies worldwide content delivery network (CDN). If you cannot download using this method, review the security restrictions for servers that company employees can download from that are outside your corporate network.

**Host Name:** ftp://ftpdownloads.ca.com

**Alternate FTP**

Uses the original download servers that are based on Long Island, New York.

**Host Name:** ftp://scftpd.ca.com for product files and download cart files and ftp://ftp.ca.com for individual solution files.

Both methods display the host, user name, password, and FTP location, which you then can copy into the sample JCL.

**Note:** The following links provide details regarding FTP: the FTP Help document link in the Review Download Requests window and the Learn More link available in the Download Methods window.

9. Submit the job.

**Important!** If your FTP commands are incorrect, it is possible for this job to fail and still return a zero condition code. Read the messages in the job DDNAME SYSPRINT to verify the FTP succeeded.

After you run the JCL job, the pax file resides in the mainframe USS directory that you supplied.

**Example: CAtoMainframe.txt, JCL**

The following text appears in the attached CAtoMainframe.txt JCL file:

```
//GETPAX JOB (ACCOUNTNO),'FTP GET ESD PACKAGE',
//          MSGCLASS=X,CLASS=A,NOTIFY=&SYSUID
//*****
/* This sample job can be used to download a pax file directly from *
/* CA Support Online to a USS directory on your z/OS system.      *
/*                                                                *
/* When editing the JCL ensure that you do not have sequence numbers *
/* turned on.                                                    *
/*                                                                *
/* This job must be customized as follows:                        *
/* 1. Supply a valid JOB statement.                               *
/* 2. The SYSTCPD and SYSFTPD JCL DD's statements in this JCL maybe *
/*    optional at your site. Remove the statements that are not  *
/*    required. For the required statements, update the data set  *
/*    names with the correct site specific data set names.       *
/* 3. Replace "Host" based on the type of download method.       *
/* 4. Replace "YourEmailAddress" with your email address.        *
/* 5. Replace "yourUSSESDdirectory" with the name of the USS     *
/*    directory used on your system for ESD downloads.          *
/* 6. Replace "FTP Location" with the complete path              *
/*    and name of the pax file obtained from the FTP location   *
/*    of the product download page.                              *
//*****
//GETPAX EXEC PGM=FTP,PARM='(EXIT',REGION=0M
//SYSTCPD DD DSN=yourTCPIP.PROFILE.dataset,DISP=SHR
//SYSFTPD DD DSN=yourFTP.DATA.dataset,DISP=SHR
//SYSPRINT DD SYSOUT=*
//OUTPUT DD SYSOUT=*
//INPUT DD *
Host
anonymous YourEmailAddress
lcd yourUSSESDdirectory
binary
get FTP location
quit
```

## Download Files to Mainframe through a PC

If you download pax or zip files from CA Support Online to your PC, use this procedure to upload the pax file from your PC to your z/OS USS directory.

### Follow these steps:

1. Follow the procedures in How the Pax-Enhanced ESD Download Works to download the product pax or zip file to your PC. If you download a zip file, first unzip the file to use the product pax files.

The pax or zip file resides on your PC.

2. Open a Windows command prompt.

The command prompt appears.

3. Customize and enter the FTP commands with the following changes:
  - a. Replace *mainframe* with the z/OS system's IP address or DNS name.
  - b. Replace *userid* with your z/OS user ID.
  - c. Replace *password* with your z/OS password.
  - d. Replace *C:\PC\folder\for\thePAXfile* with the location of the pax file on your PC.
  - e. Replace *yourUSSESDdirectory* with the name of the USS directory that you use for ESD downloads.
  - f. Replace *paxfile.pax.Z* with the name of the pax file to upload.

The pax file is transferred to the mainframe.

### Example: FTP Commands

This list is a sample of FTP commands to upload the pax file from your PC to your USS Pax-Enhanced ESD directory:

```
ftp mainframe
userid
password
bin
lcd C:\PC\folder\for\thePAXfile
cd /yourUSSESDdirectory/
put paxfile.pax.Z
quit
exit
```

## Create a Product Directory from the Pax File

Use the sample job attached to the PDF file as Unpackage.txt to extract the product pax file into a product installation directory.

**Important!** To simplify the Pax-Enhanced ESD process, the PDF version of this guide includes a sample JCL job that you can copy directly to the mainframe. To access this job, click the paper clip icon at the left of the PDF reader. A window displaying attachments opens. Double-click the file to view the sample JCL.

**Follow these steps:**

1. Supply a valid JOB statement.
2. Replace *yourUSSESDdirectory* with the name of the USS directory that you use for ESD downloads.

The job points to your specific directory.

3. Replace *paxfile.pax.Z* with the name of the pax file.

The job points to your specific pax file.

4. Submit the job.

The job runs and creates the product directory.

**Note:** If the PARM= statement exceeds 71 characters, uncomment and use the second form of UNPAXDIR instead. This sample job uses an X in column 72 to continue the PARM= parameters to a second line.

## Sample Job to Execute the Pax Command (Unpackage.txt)

The following text appears in the attached Unpackage.txt JCL file:

```
//ESDUNPAX JOB (ACCOUNTNO),'UNPAX ESD PACKAGE ',
// MSGCLASS=X,CLASS=A,NOTIFY=&SYSUID
//*****
/* This sample job can be used to invoke the pax command to create *
/* the product-specific installation directory. *
/* *
/* This job must be customized as follows: *
/* 1. Supply a valid JOB statement. *
/* 2. Replace "yourUSSESDdirectory" with the name of the USS *
/* directory used on your system for ESD downloads. *
/* 3. Replace "paxfile.pax.Z" with the name of the pax file. *
/* NOTE: If you continue the PARM= statement on a second line, make *
/* sure the 'X' continuation character is in column 72. *
//*****
//UNPAXDIR EXEC PGM=BPXBATCH,
// PARM='sh cd /yourUSSESDdirectory/; pax -rvf paxfile.pax.Z'
/*UNPAXDIR EXEC PGM=BPXBATCH,
/* PARM='sh cd /yourUSSESDdirectory/; pax X
/* -rvf paxfile.pax.Z'
//STDOUT DD SYSOUT=*
//STDERR DD SYSOUT=*
```

## Copy Installation Files to z/OS Data Sets

Use this procedure to invoke the SMP/E GIMUNZIP utility to create MVS data sets from the files in the product-specific directory.

### Follow these steps:

1. Locate and read the product readme file or installation notes, if applicable, which resides in the product-specific directory that the pax command created. This file contains the product-specific details you require to complete the installation procedure.

You have identified the product-specific installation details.

2. Use ISPF EDIT or TSO ISHELL to edit the UNZIPJCL sample job. You can perform this step in one of the following ways:
  - Use ISPF EDIT. Specify the full path name of the UNZIPJCL file.
  - Use TSO ISHELL. Navigate to the UNZIPJCL file and use the E line command to edit the file.

The job is edited.

3. Change the SMPDIR DD PATH to the product-specific directory created by the pax command.

Your view is of the product-specific directory.

4. If ICSF is not active, perform the following steps:
  - a. Change the SMPJHOME DD PATH to your Java runtime directory. This directory varies from system to system.
  - b. Perform one of the following steps:
    - Change the SMPCPATH DD PATH to your SMP/E Java application classes directory, typically /usr/lpp/smp/classes/.
    - Change HASH=YES to HASH=NO on the GIMUNZIP parameter.

One of the following occurs: ICSF is active or you are using Java.

5. Change all occurrences of *yourHLQ* to the high-level qualifier (HLQ) for z/OS data sets used by the installation process. We suggest that you use a unique HLQ for each expanded pax file to identify uniquely the package. Do *not* use the same value for *yourHLQ* as you use for the SMP/E RELFILES.

All occurrences of *yourHLQ* are set to your high-level qualifier for z/OS data sets.

6. Submit the UNZIPJCL job.

The UNZIPJCL job completes with a zero return code. Messages GIM69158I and GIM48101I in the output and IKJ56228I in the JES log are acceptable.

GIMUNZIP creates z/OS data sets with the high-level qualifier you specified in the UNZIPJCL job. You use these data sets to perform the product installation. The pax file and product-specific directory are no longer needed.

**Note:** For more information, see the IBM reference guide, *SMP/E for z/OS Reference (SA22-7772)*.

## Receive the SMP/E Package

If you are installing the package into a new SMP/E environment, see the product documentation and the sample jobs included with the product to set up an SMP/E environment before proceeding. The sample jobs can be found in *YourHLQ.SAMPJCL*.

Complete the SMP/E RECEIVE using files on DASD that the UNZIPJCL job created. Consult the product sample JCL library that contains a sample job customized to receive the product from DASD. Specifically, you specify the following values:

- DASD data set names for SMPPTFIN and SMPHOLD (if applicable)
- The HLQ that you used in the UNZIPJCL job on the RFPREFIX parameter on the RECEIVE command

## How to Install Products Using Native SMP/E JCL

The following steps describe the process to install products using native SMP/E JCL:

1. Allocate product data sets and SMP/E data sets.
2. Create SMP/E CSI.
3. Receive base functions.
4. Apply base functions.
5. Accept base functions.
6. Configure the product according to your site requirements.

## Prepare the SMP/E Environment for Pax Installation

The members used in this procedure prepare the data sets, initialize the zones, and create the DDDEFs for CA Deliver.

Prior to beginning this procedure, confirm whether your product uses UNIX System Services (USS). If it does, establishing a hierarchical file system (HFS) may be required as part of the product installation or required as a feature of the product.

For information about the members, see the comments in the JCL.

### Follow these steps:

1. Customize the macro BRNSEDIT with your site-specific information and then copy the macro to your SYSPROC location. Replace the rightmost parameters for each ISREDIT CHANGE macro command. Each time you edit an installation member, type BRNSEDIT on the TSO command line, and press Enter to replace the defaults with your specifications.

The macro is ready to customize the *yourHLQ*.SAMPJCL members.

**Note:** Set the DASD HLQ to the same value specified for *yourHLQ* for the unzip to DASD ESD JCL.

**Note:** The following steps include instructions to execute the BRNSEDIT macro each time you open a new SAMPJCL member. To edit all SAMPJCL members simultaneously, read and follow the instructions in the BRNEDALL member.

2. Open the SAMPJCL member BRN1ALL in an edit session and execute the BRNSEDIT macro from the command line.

BRN1ALL is customized.

**Note:** When upgrading into an existing CSI, comment out any allocation DD statements for existing files.



3. Submit BRN1ALL.

This job produces the following results:

- The target and distribution data sets for CA Deliver are created.
- Unique SMPPTS, SMPMTS, SMPSCDS, and SMPSTS data sets for this target zone are created.

4. If your product requires HFS or if you want to install a feature of the product that requires HFS, complete the following substeps:

- a. Open the SAMPJCL member `ccc1ALLU` in an edit session and execute the BRNSEDIT macro from the command line.

**Note:** All instances of `ccc` in this section indicate a three-character component code based on the FMID.

`ccc1ALLU` is customized.

- b. Submit `ccc1ALLU`.

This job allocates your HFS data sets.

- c. Open the SAMPJCL member `ccc2MKD` in an edit session and execute the BRNSEDIT macro from the command line.

`ccc2MKD` is customized.

- d. Submit `ccc2MKD`.

This job creates all directories and mounts the file system.

5. Open the SAMPJCL member `BRN2CSI` in an edit session and execute the BRNSEDIT macro from the command line.

`BRN2CSI` is customized.

**Note:** When upgrading into an existing CSI, comment out any allocation DD statements for existing files and delete the `CREATCSI` step. Change all `ADD`'s to `REP`'s.

6. Submit `BRN2CSI`.

This job produces the following results:

- The CSI data set is defined.
  - The `SMPPTS` and `SMPLOG` data sets are allocated.
  - The global, target, and distribution zones are initialized.
  - The `DDDEF` entries for your product are created.
- The `DDDEF`s for the required SMP/E data sets are created.

7. If your product requires HFS or if you want to install a feature of the product that requires HFS, complete the following substeps:
  - a. Open the SAMPJCL member `ccc3CSIU` in an edit session and execute the BRNSEDIT macro from the command line.  
`ccc3CSIU` is customized.
  - b. Submit `ccc3CSIU`.  
This job customizes the CSI by adding the DDDEFs associated with the directory.

## Run the Installation Jobs for a Pax Installation

Submit and run these SAMPJCL members in sequence. Do not proceed with any job until the previous job has completed successfully.

### Follow these steps:

1. Open the SAMPJCL member `BRN3RECD` in an edit session, and execute the BRNSEDIT macro from the command line.  
**Note:** Comment out any unwanted FMIDs.  
`BRN3RECD` is customized.
2. Submit the *yourHLQ*.SAMPJCL member `BRN3RECD` to receive SMP/E base functions.  
CA Deliver is received and now resides in the global zone.
3. Open the SAMPJCL member `BRN4APP` in an edit session, and execute the BRNSEDIT macro from the command line.  
**Note:** Comment out any unwanted FMIDs.  
`BRN4APP` is customized.
4. Submit the *yourHLQ*.SAMPJCL member `BRN4APP` to apply SMP/E base functions.  
Your product is applied and now resides in the target libraries.
5. Open the SAMPJCL member `BRN5ACC` in an edit session, and execute the BRNSEDIT macro from the command line.  
**Note:** Comment out any unwanted FMIDs.  
`BRN5ACC` is customized.
6. Submit the *yourHLQ*.SAMPJCL member `BRN5ACC` to accept SMP/E base functions.  
Your product is accepted and now resides in the distribution libraries.

## Clean Up the USS Directory

**Important!** This procedure is optional. Do not use this procedure until you complete the entire installation process.

To free file system disk space for subsequent downloads after downloading and processing the pax files for your CA Technologies product, we recommend removing the files from your USS directory and deleting unnecessary MVS data sets. You can delete the following items:

- Pax file
- Product-specific directory created by the pax command and all of the files in it
- SMP/E RELFILEs, SMPMCS, and HOLDDATA MVS data sets

These data sets have the HLQ that you assigned in the UNZIPJCL job.

**Note:** Retain non-SMP/E installation data sets such as *yourHLQ.INSTALL.NOTES* for future reference.

**Follow these steps:**

1. Navigate to your Pax-Enhanced ESD USS directory.

Your view is of the applicable USS directory.

2. Delete the pax file by entering the following command:

```
rm paxfile
```

***paxfile***

Specifies the name of the CA Technologies pax file that you downloaded.

The pax file is deleted.

3. Delete the product-specific directory by entering the following command:

```
rm -r product-specific-directory
```

***product-specific-directory***

Specifies the product-specific directory created by the pax command.

The product-specific directory is deleted.

**Note:** You can also use TSO ISHELL to navigate to the pax file and product-specific directory, and delete them using the D line command.

## Apply Maintenance

CA Support Online has maintenance and HOLDDATA published since the installation data was created. When the maintenance process is complete the product is ready to deploy.

### To apply maintenance

1. Check CA Support Online and download any PTFs and HOLDDATA that has been published since this release was created. If the base release was created recently, no PTFs or HOLDDATA have been published yet.
2. Transfer the downloaded files to two separate FB 80 sequential data sets. Use one data set to contain the PTFs and the other to contain the HOLDDATA.  
  
The PTFs and HOLDDATA become accessible to the *yourhlq*.SAMPJCL maintenance members.
3. The BRNSEDIT macro has been customized in the installation steps. Verify that you still have the values from the base install.
4. Open the SAMPJCL member BRN6RECP in an edit session and execute the BRNSEDIT macro from the command line.  
  
BRN6RECP is customized with your JOB statement, CSI location, and zone names.
5. Customize the BRN6RECP SMPPTFIN and SMPHOLD DD statements to reference the FB 80 data sets for the PTFs and HOLDDATA.
6. Submit BRN6RECP.  
  
The PTFs and HOLDDATA are received.
7. Open the SAMPJCL member BRN7APYP in an edit session and execute the BRNSEDIT macro from the command line.  
  
BRN7APYP is customized.
8. Submit BRN7APYP.  
  
The PTFs are applied.
9. (Optional) Open the SAMPJCL member BRN8ACCP in an edit session and execute the BRNSEDIT macro from the command line.  
  
BRN8ACCP is customized.
10. (Optional) Submit *yourhlq*.SAMPJCL member BRN8ACCP.  
  
The PTFs are accepted.

**Note:** You do not have to submit the job at this time. You can accept the PTFs according to your site's policy.

## HOLDDATA

When you apply maintenance, you typically encounter SMP/E HOLDDATA. We use HOLDDATA to notify your SMP/E system of SYSMODs that have errors or special conditions. We support system and external HOLDDATA.

### System HOLDDATA

System HOLDDATA indicates data that is an in-stream part of the SYSMOD, informing you of special conditions. The following reasons are used with SYSTEM HOLDDATA for CA Deliver:

**ACTION**

Indicates that you must perform special processing before or after you apply this SYSMOD.

**AO**

Affects automated operations. It changes either the message identifier or the displacement of a field inside the message.

**DB2BIND**

Indicates that DBRMs have changed and packages need to be rebound.

**DDDEF**

Indicates that data sets and DDDEFs are being added or modified.

**DELETE**

Deletes the SYSMOD load module. You cannot reverse this type of SYSMOD with the SMP/E RESTORE command.

**DEP**

Indicates a dependency for this SYSMOD that you must externally verify.

**DOC**

Indicates a documentation change with this SYSMOD.

**DYNACT**

Describes the steps to dynamically activate this fix without performing an IPL.

**EC**

Indicates that this SYSMOD requires a hardware engineering change. An EC hold SYSMOD usually does not affect the product unless the EC is present on the hardware device.

**ENH**

Introduces a small programming enhancement. The hold contains the instructions to implement the enhancement. If no action is needed to implement the enhancement, give a summary of the enhancement.

**EXIT**

Indicates that changes delivered by this SYSMOD require reassembly of user exits.

**EXRF**

Indicates that the SYSMOD must be installed in both the Active and Alternate Extended Recovery Facility Systems.

**IPL**

Indicates that an IPL is required for this SYSMOD to take effect. This is used only when there is no alternative for dynamic activation.

**MSGSKEL**

Indicates that the SYSMOD contains internationalized message versions which must be run through the message compiler for each language.

**MULTSYS**

Apply this SYSMOD to multiple systems for either pre-conditioning, coexistence, or exploitation.

**RESTART**

Indicates that after applying this SYSMOD, the site must perform a special restart as opposed to a routine restart.

**SQLBIND**

Indicates that a bind is required for a database system other than DB2.

**SYSMOD**

Indicates that some or all of the elements delivered by this SYSMOD are to be downloaded to a workstation.

Code a bypass operand on your APPLY command to install SYSMODs that have internal holds. Code the bypass operand only after you have performed the required action, or if you are performing the action after the APPLY, if that is appropriate.

## External HOLDDATA

External HOLDDATA is not part of the PTF. It resides in a separate file. It is commonly used for SYSMODs that have been distributed and later are discovered to cause problems.

Download the external HOLDDATA from CA Support to a DASD file, and allocate the file to the SMPHOLD DD statement. To take care of the external HOLDDATA, receive it into your SMP/E environment. SMP/E receives the HOLDDATA from CA-supplied jobs.

If a SYSMOD has an unresolved hold error, SMP/E does not install it unless you add a bypass to your APPLY command. You can bypass an error hold in situations that are not applicable to you. Error holds that are not applicable to you can include a problem that happens only with a hardware device that you do not have or in a product feature that you do not use.

When CA publishes a SYSMOD that resolves the hold, the resolving SYSMOD supersedes the hold error. This action lets you apply the original SYSMOD in conjunction with the fixing SYSMOD.

A special HOLDDATA class called ERREL exists. We have determined that the problem fixed by the SYSMOD is more important than the one that it causes. We recommend that you apply these SYSMODs.

The only manual task is running a REPORT ERRSYSMODS. This report identifies the following:

- Any held SYSMODs already applied to your system.
- Any resolving SYSMODs that are in RECEIVE status.

SMP/E identifies the SYSMOD to apply to correct the situation.

**Note:** When you have completed the procedures in this section, go to Configuring Your Product.





# Chapter 5: Installing Your Product from Tape

---

This section contains the following topics:

[Unload the Sample JCL from Tape](#) (see page 58)

[How to Install Products Using Native SMP/E JCL](#) (see page 59)

[Apply Maintenance](#) (see page 62)

## Unload the Sample JCL from Tape

To simplify the process, the PDF version of this guide includes a sample JCL job that you can copy directly to the mainframe. To access this job, click the paper clip icon at the left of the PDF reader. A window displaying attachments opens. Double-click the UnloadJCL.txt file to view the sample JCL job.

**Note:** The sample JCL to install the product is also provided in the CAI.SAMPJCL library on the distribution tape.

### Follow these steps:

1. Run the following sample JCL:

```
//COPY      EXEC  PGM=IEBCOPY,REGION=4096K
//SYSPRINT  DD   SYSOUT=*
//SYSUT1    DD   DSN=CAI.SAMPJCL,DISP=OLD,UNIT=unitname,VOL=SER=nnnnnn,
//           LABEL=(1,SL)
//SYSUT2    DD   DSN=yourHLQ.SAMPJCL,
//           DISP=(,CATLG,DELETE),
//           UNIT=sysda,SPACE=(TRK,(15,3,6),RLSE)
//SYSUT3    DD   UNIT=sysda,SPACE=(CYL,1)
//SYSIN     DD   DUMMY
```

#### ***unitname***

Specifies the tape unit to mount the tape.

#### ***nnnnnnnn***

Specifies the tape volume serial number.

#### ***yourHLQ***

Specifies the data set prefix for the installation.

#### ***sysda***

Specifies the DASD where you want to place the installation software.

The SAMPJCL data set is created and its contents are downloaded from the tape.

2. Continue with one of the following options:
  - If you already have set up the SMP/E environment, go to Run the Installation Jobs for a Tape Installation.
  - If you have *not* set up the SMP/E environment, go to Prepare the SMP/E Environment for Tape Installation.

## How to Install Products Using Native SMP/E JCL

The following steps describe the process to install products using native SMP/E JCL:

1. Allocate product data sets and SMP/E data sets.
2. Create SMP/E CSI.
3. Receive base functions.
4. Apply base functions.
5. Accept base functions.
6. Configure the product according to your site requirements.

### Prepare the SMP/E Environment for Tape Installation

The members used in this procedure prepare the data sets, initialize the zones, and create the DDDEFs for CA Deliver.

Prior to beginning this procedure, confirm whether your product uses UNIX System Services (USS). If it does, establishing a hierarchical file system (HFS) may be required as part of the product installation or required as a feature of the product.

For information about the members, see the comments in the JCL.

#### Follow these steps:

1. Customize the macro BRNSEDIT with your site-specific information and then copy the macro to your SYSPROC location. Replace the rightmost parameters for each ISREDIT CHANGE macro command. Each time you edit an installation member, type BRNSEDIT on the TSO command line, and press Enter to replace the defaults with your specifications.

The macro is ready to customize your BRN.SAMPJCL members.

**Note:** The following steps include instructions to execute the BRNSEDIT macro each time you open a new SAMPJCL member. To edit all SAMPJCL members simultaneously, read and follow the instructions in the BRNEDALL member.

2. Open the SAMPJCL member BRN1ALL in an edit session and execute the BRNSEDIT macro from the command line.

BRN1ALL is customized.

**Note:** When upgrading into an existing CSI, comment out any allocation DD statements for existing files.

3. Submit BRN1ALL.

This job produces the following results:

- The target and distribution data sets for CA Deliver are created.
- Unique SMPPTS, SMPMTS, SMPSCDS, and SMPSTS data sets for this target zone are created.

4. If your product requires HFS or if you want to install a feature of the product that requires HFS, complete the following substeps:

- a. Open the SAMPJCL member `ccc1ALLU` in an edit session and execute the BRNSEDIT macro from the command line.

**Note:** All instances of `ccc` in this section indicate a three-character component code based on the FMID.

`ccc1ALLU` is customized.

- b. Submit `ccc1ALLU`.

This job allocates your HFS data sets.

- c. Open the SAMPJCL member `ccc2MKD` in an edit session and execute the BRNSEDIT macro from the command line.

`ccc2MKD` is customized.

- d. Submit `ccc2MKD`.

This job creates all directories and mounts the file system.

5. Open the SAMPJCL member `BRN2CSI` in an edit session and execute the BRNSEDIT macro from the command line.

`BRN2CSI` is customized.

**Note:** When upgrading into an existing CSI, comment out any allocation DD statements for existing files and delete the `CREATCSI` step. Change all `ADD's` to `REP's`.

6. Submit `BRN2CSI`.

This job produces the following results:

- The CSI data set is defined.
- The `SMPPTS` and `SMPLOG` data sets are allocated.
- The global, target, and distribution zones are initialized.
- The `DDDEF` entries for your product are created.
- The `DDDEFs` for the required SMP/E data sets are created.

7. If your product requires HFS or if you want to install a feature of the product that requires HFS, complete the following substeps:
  - a. Open the SAMPJCL member `ccc3CSIU` in an edit session and execute the BRNSEDIT macro from the command line.

`ccc3CSIU` is customized.
  - b. Submit `ccc3CSIU`.

This job customizes the CSI by adding the DDDEFs associated with the directory.

## Run the Installation Jobs for a Tape Installation

Submit and run these SAMPJCL members in sequence. Do not proceed with any job until the previous job has completed successfully.

### Follow these steps:

1. Open the SAMPJCL member `BRN3RECT` in an edit session and execute the BRNSEDIT macro from the command line.

**Note:** Comment out any unwanted FMIDs.

`BRN3RECT` is customized.
2. Submit the *yourHLQ*.SAMPJCL member `BRN3RECT` to receive SMP/E base functions.

CA Deliver is received and now resides in the global zone.
3. Open the SAMPJCL member `BRN4APP` in an edit session and execute the BRNSEDIT macro from the command line.

**Note:** Comment out any unwanted FMIDs.

`BRN4APP` is customized.
4. Submit the *yourHLQ*.SAMPJCL member `BRN4APP` to apply SMP/E base functions.

Your product is applied and now resides in the target libraries.
5. Open the SAMPJCL member `BRN5ACC` in an edit session and execute the BRNSEDIT macro from the command line.

**Note:** Comment out any unwanted FMIDs.

`BRN5ACC` is customized.
6. Submit the *yourHLQ*.SAMPJCL member `BRN5ACC` to accept SMP/E base functions.

Your product is accepted and now resides in the distribution libraries.

## Apply Maintenance

CA Support Online has maintenance and HOLDDATA published since the installation data was created. After the maintenance process completes, the product is ready to deploy.

**Follow these steps:**

1. Check CA Support Online and download any PTFs and HOLDDATA published since this release was created. If the base release was created recently, no PTFs or HOLDDATA will have been published yet.
2. Transfer the downloaded files to two separate FB 80 sequential data sets. Use one data set to contain the PTFs and the other to contain the HOLDDATA.  
  
The PTFs and HOLDDATA become accessible to the *yourHLQ.SAMPJCL* maintenance members.
3. The BRNSEDIT macro was customized in the installation steps. Verify that you still have the values from the base install.
4. Open the SAMPJCL member BRN6RECP in an edit session and execute the BRNSEDIT macro from the command line.  
  
BRN6RECP is customized with your JOB statement, CSI location, and zone names.
5. Customize the BRN6RECP SMPPTFIN and SMPHOLD DD statements to reference the FB 80 data sets for the PTFs and HOLDDATA.
6. Submit BRN6RECP.  
  
The PTFs and HOLDDATA are received.
7. Open the SAMPJCL member BRN7APYP in an edit session and execute the BRNSEDIT macro from the command line.  
  
BRN7APYP is customized.
8. Submit BRN7APYP.  
  
The PTFs are applied.
9. (Optional) Open the SAMPJCL member BRN8ACCP in an edit session and execute the BRNSEDIT macro from the command line.  
  
BRN8ACCP is customized.
10. (Optional) Submit *yourHLQ.SAMPJCL* member BRN8ACCP.  
  
The PTFs are accepted.

**Note:** You do not have to submit the job at this time. You can accept the PTFs according to your site policy.

## HOLDDATA

When you apply maintenance, you typically encounter SMP/E HOLDDATA. We use HOLDDATA to notify your SMP/E system of SYSMODs that have errors or special conditions. We support system and external HOLDDATA.

### System HOLDDATA

System HOLDDATA indicates data that is an in-stream part of the SYSMOD, informing you of special conditions. The following reasons are used with SYSTEM HOLDDATA for CA Deliver:

#### **ACTION**

Indicates that you must perform special processing before or after you apply this SYSMOD.

#### **AO**

Affects automated operations. It changes either the message identifier or the displacement of a field inside the message.

#### **DB2BIND**

Indicates that DBRMs have changed and packages need to be rebound.

#### **DDDEF**

Indicates that data sets and DDDEFs are being added or modified.

#### **DELETE**

Deletes the SYSMOD load module. You cannot reverse this type of SYSMOD with the SMP/E RESTORE command.

#### **DEP**

Indicates a dependency for this SYSMOD that you must externally verify.

#### **DOC**

Indicates a documentation change with this SYSMOD.

#### **DYNACT**

Describes the steps to dynamically activate this fix without performing an IPL.

#### **EC**

Indicates that this SYSMOD requires a hardware engineering change. An EC hold SYSMOD usually does not affect the product unless the EC is present on the hardware device.

**ENH**

Introduces a small programming enhancement. The hold contains the instructions to implement the enhancement. If no action is needed to implement the enhancement, give a summary of the enhancement.

**EXIT**

Indicates that changes delivered by this SYSMOD require reassembly of user exits.

**EXRF**

Indicates that the SYSMOD must be installed in both the Active and Alternate Extended Recovery Facility Systems.

**IPL**

Indicates that an IPL is required for this SYSMOD to take effect. This is used only when there is no alternative for dynamic activation.

**MSGSKEL**

Indicates that the SYSMOD contains internationalized message versions which must be run through the message compiler for each language.

**MULTSYS**

Apply this SYSMOD to multiple systems for either pre-conditioning, coexistence, or exploitation.

**RESTART**

Indicates that after applying this SYSMOD, the site must perform a special restart as opposed to a routine restart.

**SQLBIND**

Indicates that a bind is required for a database system other than DB2.

**SYSMOD**

Indicates that some or all of the elements delivered by this SYSMOD are to be downloaded to a workstation.

Code a bypass operand on your APPLY command to install SYSMODs that have internal holds. Code the bypass operand only after you have performed the required action, or if you are performing the action after the APPLY, if that is appropriate.



## External HOLDDATA

External HOLDDATA is not part of the PTF. It resides in a separate file. It is commonly used for SYSMODs that have been distributed and later are discovered to cause problems.

Download the external HOLDDATA from CA Support to a DASD file, and allocate the file to the SMPHOLD DD statement. To take care of the external HOLDDATA, receive it into your SMP/E environment. SMP/E receives the HOLDDATA from CA-supplied jobs.

If a SYSMOD has an unresolved hold error, SMP/E does not install it unless you add a bypass to your APPLY command. You can bypass an error hold in situations that are not applicable to you. Error holds that are not applicable to you can include a problem that happens only with a hardware device that you do not have or in a product feature that you do not use.

When CA publishes a SYSMOD that resolves the hold, the resolving SYSMOD supersedes the hold error. This action lets you apply the original SYSMOD in conjunction with the fixing SYSMOD.

A special HOLDDATA class called ERREL exists. We have determined that the problem fixed by the SYSMOD is more important than the one that it causes. We recommend that you apply these SYSMODs.

The only manual task is running a REPORT ERRSYSMODS. This report identifies the following:

- Any held SYSMODs already applied to your system.
- Any resolving SYSMODs that are in RECEIVE status.

SMP/E identifies the SYSMOD to apply to correct the situation.

**Note:** When you have completed the procedures in this section, go to Configuring Your Product.



# Chapter 6: Installing Your Product from DVD

---

This section contains the following topics:

[Overview](#) (see page 67)

[Introduction to Electronic Software Delivery](#) (see page 70)

[Pax-Enhanced ESD Procedures](#) (see page 73)

[References](#) (see page 77)

## Overview

### Purpose

Welcome to the CA Electronic Software Delivery (ESD) program using the Pax-Enhanced ESD process for SMP/E installations for z/OS systems. This guide provides the information and steps that you need to copy your CA products from the CA products DVD using the Pax-Enhanced ESD process.

### Audience

We created this guide to explain the entire Pax-Enhanced ESD process for novice users. Each chapter explicitly states the required steps. We strongly suggest that you read this entire document and follow the procedures the first time you copy a product from a DVD using the Pax-Enhanced ESD program.

## Frequently Asked Questions

This section lists common questions and answers related to the Pax-Enhanced ESD process.

### #1: What is the Pax-Enhanced ESD process?

The enhanced process lets you download software directly to your mainframe and eliminates the need to download files to tape. We implemented the Pax-Enhanced ESD process in response to customer requests.

## **#2: How is the process different? What has changed?**

When using the traditional ESD process, you upload the ESD file to the mainframe and create a product installation tape using a utility program provided by CA.

The Pax-Enhanced ESD process eliminates the need for a tape and uses superior compression technology that reduces file transfer times. This process uses a UNIX portable archive interchange (pax) file. Standard z/OS utilities can read and expand the file directly to your mainframe system.

## **#3: Why did CA choose to use and require customers to use UNIX System Services (USS)?**

To improve the CA product installation process for our customers. The following list details some of the benefits of using the USS pax format to distribute software packages:

- Supports all z/OS data types including, VSAM, PDS, PDSE, HFS, and zFS.
- Allows a large number of MVS data sets to be *zipped* into a single file that can be received in a single download.
- Can be un-packed using standard utilities that are available on every z/OS system. No additional utilities or licensed products are required.
- Supports the CA Mainframe Software Manager (MSM). CA MSM makes it faster and easier to install all CA products from a browser-based user interface and eliminates many of the complexities and software knowledge of SMP/E, JCL, and other utilities.

## **#4: Do I need to do anything differently as a result? Are there any new requirements or any dependencies? Am I required to have an in-depth knowledge of UNIX System Services (USS) to use the Pax-Enhanced ESD process?**

A basic understanding of USS is sufficient if you understand UNIX and follow the steps in this guide. The appendix in this guide lists and defines common USS commands. In addition, the appendix lists IBM documents that provide detailed information about USS.

## **#5: What can I expect when I transition to the Pax-Enhanced ESD process?**

You may experience a slight learning curve the first time you use the enhanced process. We recommend reading this guide in its entirety before using the Pax-Enhanced ESD process.

**#6: Why did CA implement the new process?**

We received customer requests to eliminate the need to create an intermediate tape during the software installation process. Pax-Enhanced ESD supports installation completely from files on DASD, allowing customers to obtain and benefit from the latest CA product software releases and updates quickly, and with less manual effort.

In addition, Pax-Enhanced ESD is one of the first deliverables based on our Mainframe 2.0 strategy, which is designed to simplify software installation and other system administration functions on z/OS. We invite you to visit <http://www.ca.com/mainframe2> to learn more about Mainframe 2.0.

**#7: Does CA still provide products and maintenance on cartridge tapes?**

Yes. You can still order cartridge tapes. However, we strongly recommend using the Pax-Enhanced ESD process because it is faster and more secure than the physical tape delivery method.

**#8: Are there software prerequisites for the Pax-Enhanced ESD process?**

Yes. The Pax-Enhanced ESD process requires SMP/E 3.4 with IBM APAR IO07810 (or higher). You can get the latest release of SMP/E from IBM at no charge.

**#9: What version of Java do I need?**

The Pax-Enhanced ESD process does not require Java. If the Integrated Cryptographic Services Facility (ICFS) is not active, the GIMUNZIP SMP/E utility requires Java 1.4 or higher to generate an SHA-1 hash value.

**#10: Does this process require a specific version of z/OS?**

No. You can use Pax Enhanced-ESD on any supported version of z/OS.

**#11: How do I know that the files I'm working with are the most current?**

Check the <https://support.ca.com/> site. Log in and click Download Center. The product files on this online site will always be the most up-to-date.

## CA Product Documentation

After completing the procedures in this ESD guide, you are ready to begin the standard installation procedure. To continue the installation process, see your CA product-specific documentation.

Each CA product documentation set includes the latest technology available for online viewing, keyword searching, book marking, and printing. Documentation sets reside in one repository and are available at the CA Support Online web site. You can view and download all CA product documentation from this central repository. The following procedure details how to access product documentation.

### To download documentation from Support Online

1. On the Web, go to <https://support.ca.com/>.  
The CA Support Online Web page appears.
2. Click login at the top of the page.  
The Log in window opens.
3. Type a registered CA Support Online email address and password, and click Login.  
The CA Support Online Web page re-opens, and you are logged into CA Support Online.
4. Select Documentation located on the left side.  
The Documentation Web page opens.
5. In Find a Product Documentation Bookshelf, choose your product from the drop-down list, and click Go.  
The CA product documentation bookshelf web page opens.
6. Locate and view the HTML pages of your product-specific documentation; you can also view and download the PDF file.

## Introduction to Electronic Software Delivery

### What is Electronic Software Delivery?

CA supports a Pax-Enhanced ESD process that uses a UNIX portable archive interchange (pax) file that contains the product package.

The CA Electronic Software Delivery (ESD) process lets you download a product package in a zip file or compressed individual product components from the CA Support Online Download Center or from directories on your CA product DVD. This guide explains the steps to copy pax files from a product DVD. To download pax files from support online, go to the Download Center on <https://support.ca.com/>.

The steps in this guide provide instructions for SMP/E CA product installation on z/OS systems.

The [pax](#) (see page 72) format provides several advantages for ESD:

- It supports virtually any file type or data set type, including those for products that are based on new technology (for example, Java).
- It supports combining a large number of data sets into a single file to receive in a single download.
- It can be unpacked using standard utilities that are available on every z/OS system. Customers no longer have to install CA-proprietary utility programs or download additional software to complete the installation process.

The Pax Enhanced ESD process is the foundation on which the CA Mainframe Software Manager (MSM) was built. CA MSM can perform the required un-packing tasks.

**Important!** Most CA products have transitioned to the pax format and must be processed using the Pax-Enhanced ESD process. A small number of products are still packaged using the traditional ESD format or as legacy .AWS or .CDTAPE files. For traditional installation downloads, see the *Traditional ESD User Guide*.

## ESD Product Copy from a DVD

The DVD contains folders that include the pax files for the base product and a README file.

See [Check for the Latest Updates](#) (see page 71) for currency information and the [Pax Command](#) (see page 72) for an explanation about how this command works.

## Check for the Latest Updates

**Important!** The files provided for copy from the CA product DVD might not be the most current.

Go to <https://support.ca.com/>, log in, and click Download Center. The files on this online site will always have the most current product updates.

## File Types that Might Be Found in a Zip File Package

**Important!** If your package includes file types other than those types in the following list, see the *Traditional Electronic Software Delivery (ESD) Guide*. To access this guide, go to <https://support.ca.com/>, log in, and click Download Center. A link to the guide appears under the Download Help heading.

If you download the product from a CA product DVD, you see one or more files with the following file types:

#### ESD Pax Files:

##### .pax.Z (see page 72)

Identifies a compressed UNIX file containing product files for the enhanced ESD process.

#### Documentation Files:

##### **readme\_CA\_VIEW\_DVD.html or Readme.html**

Lists a description of the files and instructions for accessing product installation documentation. The actual file name may differ based on the product name.

**Important!** The product-specific directory may also contain an AREADME file that describes the pax download and installation process for your CA product or maintenance update. Read the AREADME file before running UNZIPJCL. If your directory includes install notes, read them before continuing. Failure to read these files impacts your installation.

## The PAX Command

The pax command does the following:

- Extracts the files and directories packaged within the pax file.
- Creates a new USS directory in the same directory structure where the pax file resides.
- Automatically generates a product and level-specific directory name.

For example, the directory created by CA MIM Resource Sharing - MVS release 11.6, genlevel 0809 pax is MIM1160809. The remaining samples in this guide show this sample folder.

**Important!** Ensure that you have sufficient free space in the USS file system that you are using for Pax ESD to hold the directory created by the pax command and its contents. You need approximately 3.5 times the pax file size in free space.

If you do not have sufficient free space, you receive EDC5133I error messages similar to the following:

```
pax: FSUM6260 write error on file "MIM116SP2/UNZIPJCL": EDC5133I
```

No space left on device.



## Pax-Enhanced ESD Procedures

### How to Install a Product from a DVD Using Pax-Enhanced ESD

This section describes the Pax-Enhanced ESD DVD install process. We recommend that you read this overview carefully *and* follow the entire procedure the first time you complete a Pax-Enhanced ESD installation.

**Important!** Downloading pax files for the SMP/E installation as part of the Pax-Enhanced ESD process requires write authority to the UNIX System Services (USS) directories used for the ESD process.

**Important!** If you prefer not to involve all CA product installers with z/OS UNIX System Services, assign a group familiar with USS to perform Steps 1 through 3 and provide the list of the unpacked MVS data sets to the product installer. Be aware that some products may require USS and/or USS SuperUser authority for additional installation steps.

#### More Information:

[USS Environment Setup](#) (see page 36)

[Allocate and Mount a File System](#) (see page 37)

[Copy the Product Pax Files into Your USS Directory](#) (see page 40)

[Create a Product Directory from the Pax File](#) (see page 45)

[Copy Installation Files to z/OS Data Sets](#) (see page 46)

[Receive the SMP/E Package](#) (see page 47)

### The Installation Procedure

There are four parts to the installation procedure:

1. Copy the files.
2. Install the files using the pax.z file.
3. Create a product Directory from the Pax File.
4. Complete the installation using your product documentation.

## Copy the Files

To copy the files

- Copy the entire product software package to your PC from the CA product DVD.

**Note:** Do not change the format of the pax.Z file.=

## Install the Files Using the pax.Z File

After copying the pax.Z files to your PC, do the following to upload the files from your PC to your z/OS USS directory.

### To install files using the pax.Z file

1. Open a Windows command prompt.

The command prompt appears.

2. Customize and enter the FTP commands with the following changes:

- Replace *mainframe* with the z/OS system's IP address or DNS name.
- Replace *userid* with your z/OS user ID.
- Replace *password* with your z/OS password.
- Type **bin**

This sets the transfer type to binary.

- Replace C:\PC\folder\for\thePAXfile with the location of the pax file on your PC.

**Note:** If you specify a location that has blanks or special characters in the path name, you must enclose that value in double quotation marks.

- Replace *yourUSSESDdirectory* with the name of the USS directory that you use for ESD downloads.
  - Replace *paxfile.pax.Z* with the name of the pax file to upload.
3. Click Enter.

The pax file is transferred to the mainframe.

The following list is a sample of the FTP commands needed to upload the pax file from your PC to your USS Pax-Enhanced ESD directory:

```
FTP mainframe
userid
password
```

```
bin
lcd C:\PC\folder\for\thePAXfile
cd /yourUSSESDdirectory/
put paxfile.pax.Z
quit
exit
```

## Create a Product Directory from the Pax File

**Important!** The sample job [Unpackage.txt](#) (see page 76) simplifies the Pax-Enhanced ESD process; you can copy this JCL job directly to the mainframe.

### To create a product installation directory using the Unpackage.txt sample job

1. Supply a valid JOB statement.
2. Replace *yourUSSESDdirectory* with the name of the USS directory that you use for ESD downloads.

The job points to your specific directory.

3. Replace *paxfile.pax.Z* with the name of the pax file.

The job points to your specific pax file.

4. Submit the job.

The job runs and creates the product directory.

**Note:** After making the changes noted in the job, if the PARM= statement exceeds 71 characters, uncomment and use the second form of UNPAXDIR instead. This sample job uses an X in column 72 to continue the PARM= parameters to a second line.

## Sample Job to Execute the Pax Command (Unpackage.txt)

The following is the text for the Unpackage.txt JCL file:

```
//ESDUNPAX JOB (ACCOUNTNO),'UNPAX ESD PACKAGE ',
// MSGCLASS=X,CLASS=A,NOTIFY=&SYSUID
//*****
/* This sample job can be used to invoke the pax command to create *
/* the product-specific installation directory. *
/* *
/* This job must be customized as follows: *
/* 1. Supply a valid JOB statement. *
/* 2. Replace "yourUSSESDdirectory" with the name of the USS *
/* directory used on your system for ESD downloads. *
/* 3. Replace "paxfile.pax.Z" with the name of the pax file. *
/* NOTE: If you continue the PARM= statement on a second line, make *
/* sure the 'X' continuation character is in column 72. *
//*****
//UNPAXDIR EXEC PGM=BPXBATCH,

// PARM='sh cd /yourUSSESDdirectory/; pax -rvf paxfile.pax.Z'
/*UNPAXDIR EXEC PGM=BPXBATCH,

/* PARM='sh cd /yourUSSESDdirectory/; pax X
/* -rvf paxfile.pax.Z'
//STDOUT DD SYSOUT=*
//STDERR DD SYSOUT=*
```

## Complete the Installation

At this point, the product has been copied from the DVD onto the PC and the file has been FTP'd to USS and is now ready to be *unpaxed*.

### To complete the installation

1. Access the *Installation Guide* in the documentation set for your product.
2. See the "Installing your product from PAX-Enhanced Electronic Software Delivery" chapter:

In the How to Install a Product Using Pax-Enhanced ESD topic, see the Use the SMP/E GIMUNZIP Utility step to proceed with the installation.

## References

### IBM Reference Manual

If you need additional information on UNIX System Services (USS) or SMP/E, see these IBM reference manuals:

- SMP/E for z/OS Reference (SA22-7772)
- z/OS UNIX System Services User's Guide (SA22-7801)
- z/OS UNIX System Services Command Reference (SA22-7802)

### Common USS Commands

This section includes basic definitions for common UNIX System Services (USS) commands:

**cd**

Changes directory.

**chgrp**

Changes ownership of one or more files to a new group ID.

**chmod**

Changes file permissions.

**chown**

Changes the file owner. This command changes the owning UID, GID, or both.

**diff**

Compares file or directory contents. `diff -gr dir1/ dir2/` lists files that are different in dir1 and dir2.

**find**

Finds files with specified attributes.

**grep**

Finds text strings in files. For example, `grep -i string *` scans all files in the current directory for the specified string. The `-i` means that the search is not case-sensitive.

**iconv**

Converts from one character set to another.

**lp**

Directs output to line printer.

**ls**

Lists the file in a directory.

**man**

Displays the UNIX help for a command. For example, `man chmod` displays the UNIX help for the `chmod` command.

**mkdir**

Creates a directory.

**mv**

Moves or renames one or more files or directories.

**nm**

Displays the symbol table from an executable file.

**rm**

Deletes a file or directory.

**od**

Produces an octal dump of a file. Also does hexadecimal dumps.

**ps**

Displays information about active processes.

**strings**

Lists text strings in an executable file.

**wall**

Sends a message to all logged in users.

**whence**

Identifies the location of an executable file.

**who**

Displays the logged on users and information about them.

# Chapter 7: Starting Your Product

---

This section describes what you need to do to start CA Deliver.

This section contains the following topics:

[How to Complete Deployment With CA MSM](#) (see page 79)

[How to Complete Configuration With CA MSM](#) (see page 79)

[How to Configure Without CA MSM](#) (see page 91)

## How to Complete Deployment With CA MSM

The topics in this section describe the manual tasks you perform when [deploying your product using CA MSM](#) (see page 28).

## How to Complete Configuration With CA MSM

The topics in this section describe the manual tasks you perform when [configuring your product using CA MSM](#) (see page 29).

### Authorize Program Load Libraries

All users must perform this step.

To either authorize the program load library or copy the modules to a system-authorized library, do *one* of the following:

- If you want CA Deliver to execute from its own load library, APF-authorize the load library by adding an entry for CAI.CVDELOAD to member PROGxx of SYS1.PARMLIB.

**Note:** Use MVS system command SET PROG=xx to activate update to PROGxx.

- If you do *not* want to APF-authorize the CA Deliver target library, copy the load modules in CAI.CVDELOAD to an existing authorized library such as SYS1.LINKLIB or any other library in the linklist.

Use *one* of the following methods to copy the load modules:

- ISPF option 3.3
- Member HBRNCAPF of CAI.CVDEJCL

Run this batch job to copy the load modules from CAI.CVDELOAD to USER.APFLIB.

**Important:** We recommend that you authorize CVDELOAD rather than copying the modules. The load modules must reside in an authorized library.

## Enter the LMP Code

All users must perform this step.

CA Deliver requires CA LMP (License Management Program), one of the CA Common Services, to initialize correctly. CA LMP provides a standardized and automated approach to the tracking of licensed software. Examine the CA LMP Key certificate you received with your product installation or maintenance cartridge.



## The LMP Key Certificate

Your LMP Key certificate contains the following information:

### Product Name

Signifies the trademarked or registered name of the copy of CA Deliver licensed for your designated site and CPUs.

### Supplement

Signifies the reference number of your license for the particular CA Deliver, in the format nnnnnn nnn.

This format differs slightly inside and outside North America and, in some cases, may not be provided at all.

### Expiration Date

Signifies the date (MONTH dd, yyyy as in OCTOBER 21, 2009) when your license expires for the installation and maintenance of the designated CA Deliver.

### Technical Contact

Signifies the name of the technical contact at your site who is responsible for the installation and maintenance of CA Deliver.

This is the person to whom CA addresses all CA LMP correspondence.

### MIS Director

Signifies the name of the Director of MIS, or the person who performs that function at your site.

If the title, but not the individual's name, is indicated on the certificate, you should supply the actual name when correcting and verifying the certificate.

### CPU Location

Signifies the address of the building where the CPU is installed.

### Execution Key

Signifies the encrypted code required by CA LMP for CA Deliver initialization.

During installation, this code is referred to as the LMP Code.

### Product Code

Signifies the two-character code that corresponds to CA Deliver.

### CPU ID

Signifies a code that identifies the specific CPU for which installation of your CA Deliver is valid.

The CA LMP execution key (provided on the key certificate) must be added to the CAIRIM parameters to ensure proper initialization of the CA software solution.

## Defining the CA LMP Execution Key

To define a CA LMP execution key to the CAIRIM parameters, modify member KEYS in OPTLIB data set.

Syntax is as follows:

```
PROD(pp) DATE(ddmmyy) CPU(tttt-mmmm/ssssss)
LMPCODE(kkkkkkkkkkkkkkk)
```

where:

### **pp**

Signifies the two-character product code (required).

For any given CA LMP software solution, this code agrees with the product code already in use by the CAIRIM initialization parameters for earlier service packs of the product.

### **ddmmyy**

Signifies the CA LMP licensing agreement expiration date (required).

### **tttt-mmmm**

Signifies the CPU type and model (for example, 3090-600) on which the CA LMP software solution will run (required).

If the CPU type and/or model requires less than four characters, blank spaces are inserted for the unused characters.

### **ssssss**

Signifies the serial number of the CPU on which the CA LMP software solution will run (required).

### **kkkkkkkkkkkk**

Signifies the execution key needed to run the CA LMP software solution (required).

This CA LMP execution key is provided on the key certificate shipped with each CA LMP software solution.

This example shows a control statement for the CA LMP execution software parameter.

**Note:** The CA LMP execution key is *invalid* and is provided as an example only.

```
PROD(HV) DATE(21OCT09) CPU(3090-600 /370623)
LMPCODE(52H2K06130Z7RZD6)
```

For a full description of the procedure for defining the CA LMP execution key to the CAIRIM parameters, see the installation tasks in the *CA Common Services Getting Started*.

## Multiple LMP Codes

CA Deliver consists of the base product and several components (options) that are purchased separately. Because each component has its own LMP code, you must supply an LMP code for each component you purchased.

This table lists the component product codes:

<i>pp</i>	Component Description
HV	CA Deliver base product
HW	CICS online interface
HX	IMS/DC online interface
HZ	Native TSO online interface
IF	CA Roscoe online interface
IJ	VTAM online interface

**Note:** For more information about the components, see Software Requirements in the chapter "System Requirements."

## Define Security Rules

All users must perform this step.

## Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for information that applies to this step.

CA Deliver has full external security support that uses security classes. CA Deliver interfaces with CA Top Secret, CA ACF2, and IBM's RACF and it gives you the ability to define a security table and use security exits.

**Note:** For more information about security, see the chapter "Security" in the *CA Deliver Reference Guide*.

## Install the ISPF Online Retrieval Option

The ISPF online retrieval option runs under the IBM Interactive System Productivity Facility (ISPF).

This list summarizes the steps required to install the ISPF online retrieval option. Detailed instructions are in the sections that follow.

1. (Optional) Add STEPLIB Statements  
If the load modules were *not* copied to a linklist library, add STEPLIB DD statements to the TSO LOGON procedures.
2. Add the Panel and Command Libraries  
Add the panel and command table libraries to the TSO LOGON procedures.
3. (Optional) Modify an ISPF Selection Menu to Select Online Retrieval.

### (Optional) Step 1: Add STEPLIB Statements

The action you take in this step depends on what you did during the base product installation—specifically, did you:

- Authorize the program load library or
- Copy the modules to a system-authorized library

If the CA Deliver load modules were *not* copied to one of the libraries in the linklist, proceed with this step; otherwise go directly to the next step.

#### Follow these steps:

1. Add STEPLIB DD statements to the TSO LOGON procedures if the load modules are not in a linklist library.
2. Add a STEPLIB DD statement for the library containing the product's load modules to the LOGON procedures for those TSO users who are going to be using the ISPF online retrieval option.

**Note:** If you have CA View, the CA View load modules must also be either in the linklist or in a STEPLIB statement with this step.

### Step 2: Add the Panel and Command Libraries (ISPF only)

**Note:** If you are running under SPF, go to Step 3.

If you run CA Deliver under ISPF, proceed with this step.

To add the panel and command libraries to the TSO LOGON procedure:

1. Concatenate the command table library CAI.CVDETBLO to DD statement ISPTLIB.
2. Concatenate the panel library CAI.CVDEPNLO to DD statement ISPPLIB.

**Note:** If you also plan to use RMOSPF (the ISPF interface), and multiple versions of CA Deliver, concatenate CAI.CVDETBLO first. Use the CAI.CVDETBLO from the most current release.

### Step 3: (Optional) Modify an ISPF Selection Menu to Select Online Retrieval

If you want to add a selection code for the online retrieval feature to one of the ISPF selection menus, proceed with this step; otherwise, your detailed instructions for ISPF are complete.

To define your selection code, use the following command:

```
PGM(RMOSPF) PARM(high-level-database-name) NEWAPPL(RM0)
```

Use the value next to the NAME parameter on your Initialization Parameter Worksheet for PARM (high-level-database-name).

**Note:** Adding a selection code allows you to select the online retrieval feature in the same way you would select other ISPF options.

### Panel Libraries

The names of the panel libraries vary from site to site and for the different releases of ISPF. These panel libraries are allocated to the ISPLIB DD statement under TSO.

Be aware that some installations do not allow direct modifications of IBM panels and libraries. In this case, you can place the modified panels in user or site-specific libraries and concatenate them ahead of the IBM libraries.

Ask your system administrator for the specific ISPF panel library that applies to your site and contains the panel ISR@PRIM.

**Note:** The selection menus shown in the following examples are part of the program product ISPF and are copyrighted by IBM.

### Example 1

This example shows you how to add selection code R to the primary option menu ISR@PRIM for ISPF.

The offset lines are the inserted lines.

```

%----- ISPF/PDF PRIMARY OPTION MENU -----
%OPTION ==>_ZCMD
%
%                                +USERID  - &ZUSER
% 0 +ISPF PARMs - SPECIFY TERMINAL AND USER PARAMETERS +TIME -
% 1 +BROWSE    - DISPLAY SOURCE DATA OR OUTPUT LISTINGS +TERMINAL -
% 2 +EDIT      - CREATE OR CHANGE SOURCE DATA          +PF KEYS - &ZKEYS
% 3 +UTILITIES - PERFORM UTILITY FUNCTIONS
% 4 +FOREGROUND - INVOKE LANGUAGE PROCESSORS IN FOREGROUND
% 5 +BATCH     - SUBMIT JOB FOR LANGUAGE PROCESSING
% 6 +COMMAND   - ENTER TSO COMMAND, CLIST, OR REXX EXEC
% 7 +DIALOG TEST - PERFORM DIALOG TESTING
% 8 +LM UTILITIES - PERFORM LIBRARY ADMINISTRATOR UTILITY FUNCTIONS
% C +CHANGES  - DISPLAY SUMMARY OF CHANGES FOR THIS RELEASE
% R +RMOSPF    - DELIVER ADMINISTRATION
% T +TUTORIAL  - DISPLAY INFORMATION ABOUT ISPF/PDF
% X +EXIT      - TERMINATE ISPF USING LOG AND LIST DEFAULTS

%
+ENTER%END+COMMAND TO TERMINATE ISPF.
)INIT
  .HELP = ISR00003
  &ZPRIM = YES /* ALWAYS A PRIMARY OPTION MENU */
  &ZHTOP = ISR00003 /* TUTORIAL TABLE OF CONTENTS */
  &ZHINDEX = ISR91000 /* TUTORIAL INDEX - 1ST PAGE */
)PROC
  &ZSEL = TRANS( TRUNC (&ZCMD, '.')
    0, 'PANEL(ISPOPTA)'
    1, 'PGM(ISRBRO) PARM(ISRBRO01)'
    2, 'PGM(ISREDIT) PARM(P,ISREDM01)'
    3, 'PANEL(ISRUTIL)'
    4, 'PANEL(ISRFPA)'
    5, 'PGM(ISRJB1) PARM(ISRJPA) NOCHECK'
    6, 'PGM(ISRPTC)'
    7, 'PGM(ISPYXDR) PARM(ISR) NOCHECK'
    8, 'PANEL(ISRLPRIM)'
    C, 'PGM(ISPTUTOR) PARM(ISR00005)'
    R, 'PGM(RMOSPF) PARM(RMO.SYSTEM1) NEWAPPL(RMO)'
    T, 'PGM(ISPTUTOR) PARM(ISR00000)'
    ' ', ' '
    X, 'EXIT'
    *, '?' )

  &ZTRAIL = .TRAIL
)END

```

**Note:**

- NEWAPPL(RMO) is required and must be specified as shown previously in this section.

This parameter is used with the command table library concatenation from Step 3 of the ISPF Installation Instructions.

- NEWAPPL(RMO) allows CA Deliver to correctly interpret commands and program function key invocation.

If this parameter is not specified, certain PF keys such as the scroll keys may not function.

### Example 3

This example shows you how to add selection code 3.R as a sub-option to the utilities menu ISPUTIL for ISPF.

The offset lines are the inserted lines.

```
%----- UTILITY SELECTION MENU -----
%OPTION ==> _OPT      +
%
% 1 +LIBRARY      - LIBRARY UTILITY:
+                  PRINT INDEX LISTING OR ENTIRE DATASET
+                  PRINT, RENAME, DELETE, OR BROWSE MEMBERS
+                  COMPRESS DATASET
% 2 +DATASET      - DATASET UTILITY:
+                  DISPLAY DATASET INFORMATION
+                  ALLOCATE, RENAME, OR DELETE ENTIRE DATASET
+                  CATALOG OR UNCATALOG DATASET
% 3 +MOVE/COPY    - MOVE OR COPY MEMBERS OR DATASETS
% 4 +CATALOG      - CATALOG MANAGEMENT:
+                  DISPLAY OR PRINT CATALOG ENTRIES
+                  INITIALIZE OR DELETE USER CATALOG ALIAS
% 5 +RESET        - RESET STATISTICS FOR MEMBERS OF ISPF LIBRARY
% 6 +HARDCOPY     - INITIATE HARDCOPY OUTPUT
% 7 +VTOC         - DISPLAY OR PRINT VTOC ENTRIES FOR A DASD VOLUME
% 8 +OUTLIST      - DISPLAY, DELETE, OR PRINT HELD JOB OUTPUT
% 9 +SCRIPT/VS    - FORMAT, DISPLAY, AND OPTIONALLY PRINT SCRIPT TEXT
% R +RMOSPF       - DELIVER ADMINISTRATION

)INIT
  .HELP = TU
)PROC
  &SEL = TRANS( TRUNC (&OPT, '.')
               1, 'PGM(ISPUDA) PARM(UDA1)'
               2, 'PGM(ISPUDA) PARM(UDA1)'
               3, 'PGM(ISPUMC)'
               4, 'PGM(ISPUCA)'
               5, 'PGM(ISPURS)'
               6, 'PGM(ISPUHC)'
               7, 'PGM(ISPUVT)'
               8, 'PGM(ISPUOL) PARM(UOL01)'
               9, 'PGM(ISPUSC) PARM(SCRPTA)'
               R, 'PGM(RMOSPF) PARM(RM0.SYSTEM1) NEWAPPL(RM0)'
               , , ,
               *, '?' )
)END
```



## Install the TSO Online Retrieval Option

The following step is required to install the TSO online retrieval option and is explained in detail in the next topic.

(Optional) Add STEPLIB DD statements to the TSO LOGON procedures if the load modules are not in a linklist library.

### Step 1: (Optional) Add STEPLIB DD Statements

The action you take in this step depends on what you did during the base-product installation—specifically, did you:

- Authorize the program load library or
- Copy the modules to a system authorized library

If the load modules were *not* copied to one of the libraries in the linklist:

- Add a STEPLIB DD statement (for the library containing the load modules) to the TSO LOGON procedures for those TSO users who are to use the native TSO online retrieval option.

If the load modules were copied to one of the libraries in the linklist, no STEPLIB DD statements are required.

**Note:** If you have CA View, the CA View load modules either must also be in the linklist, or placed in a STEPLIB statement with this step.

### Step 2: (Optional) Add Mount Attributes

Assign the mount attribute to all TSO user IDs authorized to browse SYSOUT directly from an archival tape. Use the TSO ACCOUNT command to assign the mount attribute as follows:

```
ACCOUNT  
C (userid) MOUNT  
END
```

## Install the CA Roscoe Online Retrieval Option

The CA Roscoe online retrieval option runs as a command processor under ETSO/Roscoe.

The following steps are required to install the CA Roscoe/Cross-Memory Online Retrieval Option. Each step is explained in detail in the sections that follow.

1. (Optional) Concatenate the Load Module Library to the ETSOLIB DD statement, if the load modules were not copied to a linklist library.
2. Add the control statement for the RMOROS command processor to the Eligible Program List (EPL).
3. Invoke the RMOROS command processor.

### Step 1: (Optional) Concatenate the Load Module Library

If the load modules were *not* copied to a linklist library, concatenate the library that contains the load modules to the ETSOLIB DD statement in the CA Roscoe startup JCL.

**Note:** If you have CA View, the CA View load modules must also be either in the linklist or in an ETSOLIB statement with this step.

### Step 2: Add RMOROS Command Process

Add this Eligible Program List control statement to member ETSOPGMS for the CA Roscoe user with the RO prefix:

Column	Contents
1–8	RMOROS
9	Blank
10–12	Number of users allowed to access CA Deliver at one time
13	Blank
14–17	CPU time slice; use 9999 to prevent premature termination
18	Blank
19–24	Maximum memory (in KB) below the 16 MB line This value can vary depending on size of database and other factors (0001000 should be adequate).
25	Blank
26–31	Maximum memory (in KB) below the line that CA Deliver can acquire at one time Use 999999 so that GETMAINs are not limited.

Column	Contents
32	Blank
33–38	Maximum memory (in KB) above the 16 MB line This value can vary depending on the features used (000512 should be adequate).
39	Blank
40–45	Maximum memory (in KB) above the line that CA Deliver can acquire at one time Use 999999 so that GETMAINS are not limited.
46	Blank
47–48	CP to call RMOROS as a TSO command processor
49	Y – Application authorized to issue MODESET SVC
50	Blank
51-52	CP to call ECOXMROS as a TSO command processor
53-255	Ignored

## Install the XMS Online Interfaces (Optional)

If you want to install the XMS Online Interfaces to complete configuration with MSM see the topic *How to Complete Configuration of the XMS Online Interfaces with CA MSM* in the chapter *Installing the Online Interfaces*.

## How to Configure Without CA MSM

The topics in this section describe the manual tasks you perform if you are not configuring your product using CA MSM.

### Step 1: Authorize Program Load Libraries

All users should perform this step.

Do *one* of the following to either authorize the program load library or copy the modules to a system-authorized library:

- If you want CA Deliver to execute from its own load library, APF-authorize the load library by adding an entry for CAI.CVDELOAD to member PROGxx of SYS1.PARMLIB.

**Note:** Use MVS system command SET PROG=xx to activate update to PROGxx.

- If you do *not* want to APF-authorize the CA Deliver target library, copy the load modules in CAI.CVDELOAD to an existing authorized library such as SYS1.LINKLIB or any other library in the linklist.

Use *one* of the following methods to copy the load modules:

- ISPF option 3.3
- Member HBRNCAPF of CAI.CVDEJCL

This batch job can be run to copy the load modules from CAI.CVDELOAD to USER.APFLIB.

**Important:** We recommend that you authorize CVDELOAD rather than copying the modules. The load modules must reside in an authorized library.

## Step 2: Enter the LMP Code

All users must perform this step.

CA Deliver requires CA LMP (License Management Program), one of the CA Common Services, to initialize correctly. CA LMP provides a standardized and automated approach to the tracking of licensed software.

Examine the CA LMP Key certificate you received with your product installation or maintenance cartridge.

## The LMP Key Certificate

Your LMP Key certificate contains the following information:

### Product Name

Signifies the trademarked or registered name of the copy of CA Deliver licensed for your designated site and CPUs.

### Supplement

Signifies the reference number of your license for the particular CA Deliver, in the format nnnnnn nnn.

This format differs slightly inside and outside North America and, in some cases, may not be provided at all.

### Expiration Date

Signifies the date (MONTH dd, yyyy as in OCTOBER 21, 2009) when your license expires for the installation and maintenance of the designated CA Deliver.

### Technical Contact

Signifies the name of the technical contact at your site who is responsible for the installation and maintenance of CA Deliver.

This is the person to whom CA addresses all CA LMP correspondence.

### MIS Director

Signifies the name of the Director of MIS, or the person who performs that function at your site.

If the title, but not the individual's name, is indicated on the certificate, you should supply the actual name when correcting and verifying the certificate.

### CPU Location

Signifies the address of the building where the CPU is installed.

### Execution Key

Signifies the encrypted code required by CA LMP for CA Deliver initialization.

During installation, this code is referred to as the LMP Code.

### Product Code

Signifies the two-character code that corresponds to CA Deliver.

### CPU ID

Signifies a code that identifies the specific CPU for which installation of your CA Deliver is valid.

The CA LMP execution key (provided on the key certificate) must be added to the CAIRIM parameters to ensure proper initialization of the CA software solution.

## Defining the CA LMP Execution Key

To define a CA LMP execution key to the CAIRIM parameters, modify member KEYS in OPTLIB data set.

Syntax is as follows:

```
PROD(pp) DATE(ddmmyy) CPU(tttt-mmmm/ssssss)
LMPCODE(kkkkkkkkkkkkkkk)
```

where:

### **pp**

Signifies the two-character product code (required).

For any given CA LMP software solution, this code agrees with the product code already in use by the CAIRIM initialization parameters for earlier service packs of the product.

### **ddmmyy**

Signifies the CA LMP licensing agreement expiration date (required).

### **tttt-mmmm**

Signifies the CPU type and model (for example, 3090-600) on which the CA LMP software solution will run (required).

If the CPU type and/or model requires less than four characters, blank spaces are inserted for the unused characters.

### **ssssss**

Signifies the serial number of the CPU on which the CA LMP software solution will run (required).

### **kkkkkkkkkkkk**

Signifies the execution key needed to run the CA LMP software solution (required).

This CA LMP execution key is provided on the key certificate shipped with each CA LMP software solution.

This example shows a control statement for the CA LMP execution software parameter.

**Note:** The CA LMP execution key is *invalid* and is provided as an example only.

```
PROD(HV) DATE(21OCT09) CPU(3090-600 /370623)
LMPCODE(52H2K06130Z7RZD6)
```

For a full description of the procedure for defining the CA LMP execution key to the CAIRIM parameters, see the installation tasks in the *CA Common Services Getting Started*.

## Multiple LMP Codes

CA Deliver consists of the base product and several components (options) that are purchased separately. Because each component has its own LMP code, you must supply an LMP code for each component you purchased.

This table lists the component product codes:

<i>pp</i>	Component Description
HV	CA Deliver base product
HW	CICS online interface
HX	IMS/DC online interface
HZ	Native TSO online interface
IF	CA Roscoe online interface
IJ	VTAM online interface

**Note:** For more information about the components, see Software Requirements in the chapter "System Requirements."

## Step 3: Define Security Rules

All users must perform this step.

### Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for information that applies to this step.

CA Deliver has full external security support that uses security classes. CA Deliver interfaces with CA Top Secret, CA ACF2, and IBM's RACF and it gives you the ability to define a security table and use security exits.

**Note:** For more information about security, see the chapter "Security" in the *CA Deliver Reference Guide*.

## Step 4: Create/Update the Database

All new users must perform this step.

## Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for more information about how to perform this step.

For new installations, to create the database use the ADDDS and MAKECKPT control statements in the RMODBASE utility program. Member HBRNADDS of CAI.CVDEJCL provides a sample set of parameters for this job.

**Note:** For more information about the RMODBASE utility, see the chapter "Utilities" in the *CA Deliver Reference Guide*.

## Step 5: Create the Initialization Parameter Statements

All users must perform this step.

### Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for information that applies to this step.

For new installations, create the initialization parameter statements for the started task which can be a member within a PDS. This member is referenced by the RMOPARMS DD statement of the started task. Member RMOPARMS in CAI.CVDEOPTN provides a sample initialization parameter member.

**Note:** For more information about the descriptions of these parameters, see the chapter "Initialization Parameters" in the *Reference Guide*.

The data sets for the initialization parameter statements must:

- Be members in a partitioned data set
- Have a logical record length of 80 (LRECL=80)
- Have a block size of any multiple of 80 (for example, BLKSIZE=3200)
- Have record format FB (RECFM=FB)

## Step 6: Modify the Skeleton JCL

All users must perform this step.

Examine the skeleton JCL and make any necessary changes by editing member RMOJCLB in the CAI.CVDEPENU data set. The following sections explain how to do this editing.

The online task uses the skeleton JCL to submit background bundle jobs.



## Bundle Output Carriage Control

By default, machine carriage control produces batch bundle output for all banner pages and reports within the bundle.

If changes are required, the RMOJCLB skeleton JCL can be modified to instruct the batch bundle program to create batch bundle output with ASA carriage control. You can specify this option by adding ",ASA" after the database index name variable &IDX on the PARM field of the EXEC statement for RMOBBP in the skeleton JCL as follows:

```
//STEP1    EXEC  PGM=RMOBBP ,  
//          PARM='&IDX,ASA'
```

### Notes:

- By default, the beginning of each individual SYSOUT data set within the bundle contains a no skip ("+") ASA carriage control character. If you want the individual SYSOUT data sets to start with a skip to top of form ("1") ASA carriage control character, change the model bundle banner page members to use a "J" carriage control character instead of a "1" carriage control character.
- For more details on how to customize model banner pages, see the chapter Model Banner Pages in the *Reference Guide*.

## Define STEPLIBs

The only change you make to the skeleton JCL is to the STEPLIB DD statement. If you are running CA View out of a separate CVDELOAD, the STEPLIB statement has to concatenate both the CA Deliver and CA View CVDELOADs.

Remove the STEPLIB DD statement if the CVDELOAD (or CVDELOADs) are in your linklist.

Be aware that you must concatenate the CA View load library after the CA Deliver load library in the STEPLIB statement.

## Step 7: Load the Online Panels and JCL Library

All users must perform this step.

### Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for more information about this step.

Load the online panel and JCL library members to the database from the CAI.CVDEPENU data set.

The RMODBASE OLOAD control statement is used to load the panel, message, and skeleton JCL members in the online library to the database. The online library is defined with the DD statement RMOOLIB.

**Note:** The *high-level* name of the database must have been defined with the NAME control statement (or the PARM parameter of the EXEC JCL statement).

Syntax:

OLOAD

Member HBRNOLOD of CAI.CVDEJCL provides sample JCL for this job.

## Customizing BROWSE and HELP Panels

The CAI.CVDEPENU data set contains the BROWSE and HELP panels; you can modify them with the following limitations:

### Constants:

Constants can be modified and their length can be increased or decreased. The new text displays as coded.

### Variables:

- Most variables can be moved around the screen as long as the original variable names are retained  
Be aware that the relative position of some variables is critical.
- The length of a variable can be changed, but be aware that the product pads the value with blanks (or truncates it) to conform to its internal length.
- Any variable can be deleted from a panel.
- An attempt to add a new variable to a screen results in the variable name itself appearing on the screen, without interpretation.

## Customizing Panels for Color and Highlight

CA Deliver supports the display of the following colors:

- Blue
- Red
- Pink
- Green
- Turquoise
- Yellow
- White

CA Deliver supports the following highlight attributes:

- Blink
- Reverse video
- Underscore

**Note:** For these attributes, the colors used must be red, white, blue, or green.

Define color and highlight attributes on the CA Deliver panels according to the rules listed in the IBM manual *ISPF Dialog Developer's Guide and Reference*.

The following hexadecimal characters are reserved and cannot be defined as attribute statements on a panel:

**00**

Represents Null character.

**0E**

Represents Shift out.

**0F**

Represents Shift in.

**40**

Represents Blank.

**50**

Represents Ampersand (&).

## Step 8: Load the Model Banner Pages and Email Format (EFORMAT) members

All users must perform this step.

### Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for more information about this step.

Review, change, or add model banner page and/or email format members in the model banner page library.

**Note:** For more information about model banner page and email format members, see the chapter "Model Banner Page and Email Format Members" in the *Reference Guide*.

Load the model banner page and email format members to the database from the CAI.CVDE133 data set.

The RMODBASE BLOAD control statement is used to load the model banner page and email format members in the model banner page library to the database. The model banner page library is defined with the DD statement RMOBLIB.

**Note:** The *high-level* name of the database must have been defined with the NAME control statement (or the PARM parameter of the EXEC JCL statement).

Syntax:

BLOAD

Member HBRNBLOD of CAI.CVDEJCL provides sample JCL for this job.

## Step 9: Add the Start Procedure to PROCLIB

All users must perform this step.

### Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for more information about this step.

### Add the Start Procedure

To add the start procedure to the PROCLIB for the started task:

1. Add the start procedure JCL, located in CBRNSSSTC in CAI.CBRNPROC, as member RMOSTC of SYS1.PROCLIB:

```
//RMOSTC    EXEC  PGM=RMOSTC,TIME=1440,REGION=128M
//STEPLIB   DD   DSN=CAI.CVDELOAD,DISP=SHR
//SYSUDUMP  DD   SYSOUT=A
//RMOPARMS  DD   DSN=CAI.CVDEOPTN(RMOPARMS),DISP=SHR
//*RMOJTAB  DD   DSN=your.rmojtab,DISP=SHR
```

2. Set the recommended CA Deliver REGION size.

We recommend that you run CA Deliver with a minimum REGION=128M. This covers the current storage requirements for a daily cycle and can be useful and still provide a reserve that might be needed when extra storage is required.

Alternately, if you do not want to set the REGION size to 128M, start RMOSTC with a 128M region and continue with the same value for at least two days to monitor the processing for two daily cycles.

Bring RMOSTC down and review the *IEF374I* message in the JOBLLOG; this log provides a high-water mark of the storage use.

The REGION value is in K not M, so divide the value *nnnK* by 1024 to get the value in M. Round the result up and add at least 5 to the result. This gives you the minimum region size to use.

For example:

```
VIRT  540K SYS   296K EXT  40998K SYS  10124K
```

The storage usage value in this example is 40998K. If you divide this by 1024 you get a value over 40 (round up the result to 41 and add 5).

The required region in this case is 46M.

3. Do one of the following:
  - If the load modules were copied to an authorized library other than a linklist library, change the data set name on the STEPLIB DD statements.
  - If the load modules were copied to a linklist library, remove the STEPLIB DD statements.

4. If you use direct-to-VIEW, and the CA VIEW load library is separate, add it to the STEPLIB concatenation.

Load module SARPAM in the CA View load library is required for direct-to-VIEW archival.

5. Change the data set name on the RMOPARMS DD statement to the name of the card image data set that contains the initialization parameter statements.

RMOPARMS can be a member of a PDS:

```
//RMOPARMS DD DSN=CAI.CVDEOPTN(RMOPARMS),DISP=SHR
```

6. The RMOJTAB DD statement is optional; include it when job name translation control statements are to be input to the started task.

The DD statement that is commented out in the procedure is an example only and must be changed to point to your *rmojtab*.

**Note:** For more information about how to code this table, see the chapter "The Database" in the *Reference Guide*.

## Step 10: (Optional) Maintain Detail History with JES2

This step is for JES2 sites only. JES3 users should go to the (Optional) Maintain Detail History with JES3 step.

Detail History is an optional feature of CA Deliver that is activated by setting HDETAIL=YES in your initialization parameters. More DASD space is required for storing this historical data than is required for running without it.

If you decide that you would like to maintain detailed historical data with the actual date and time that reports and bundles are printed, continue with the next section, Capturing Detailed Historical Data. Otherwise, go to the Set Up for Multiple CPUs step.

**Note:** Detailed history can consume a considerable amount of DASD space. For more information, see the description of the basic and detailed history panels in Appendix A of the *Administration Guide*.

## Capture Detailed Historical Data

Do the following to capture detailed historical data:

1. Determine the following:
  - Do you want to capture detailed historical data?  
and:  
Do you use impact printers or IBM 3800 printers that are operating in compatibility mode?
  - Is your printer a local, channel-attached printer?  
or:  
Do you use APF printers that are driven by IBM's PSF?
2. Do *one* of the following:
  - If you answered No to both of the conditions in Step 1, go to the Set Up for Multiple CPUs step.
  - If you answered Yes to either of the conditions in Step 1, assemble and link edit RMOJ2XIT.  
  
RMOJ2XIT contains the source for EXIT1 and EXIT15, as a member of your JES2 load library (SYS1.LINKLIB).  
  
**Note:** Apply USERMOD RMOJ2XIT. This USERMOD is located in dataset CAI.CVDEJCL as member BRNSJ2X.  
  
Add the following JES2 initialization parameters to the JES2 startup initialization stream:  
  
EXIT1    ROUTINE=RMOJ2X1  
EXIT15   ROUTINE=RMOJ2X15  
LOAD    RMOJ2XIT
  - If you answered Yes to the AFP condition in Step 1, you have to install exit RMOFSSUX. For more information, see the chapter User Exits in the *Reference Guide*.

## Step 11: (Optional) Maintain Detail History with JES3

This step is for JES3 sites only.

Detail History is an optional feature of CA Deliver; to activate it set HDETAIL=YES in your initialization parameters.

**Note:** Storing this historical data requires considerably more DASD space than running without it does.

If you decide that you want maintain detailed historical data with the actual date and time that reports and bundles are printed:

- Assemble the front-end control sections
- Link edit the sections with the JES3 load modules as shown in the following table:

CA Deliver JES3 User Exit Front-End Control Sections	JES3 User Exit Load Modules	USERMOD to Install
RMOJ3X21	IATUX21	BRNSJ321
RMOJ3X23	IATUX23	BRNSJ323

Your JES3 load module library is to appear as the data set name of the L.SYSLMOD DD statements.

To install these exits, use the USERMODs located in CAI.CVDEJCL. Note that the source for these exits is located within the USERMOD.

**Note:** Bring JES3 down then bring it up to turn on the user exits.

If you are driving APF printers with IBM's PSF, install the exit RMOFSSUX. For more information, see the chapter User Exits in the *Reference Guide*.

**Note:** Detailed history can consume a considerable amount of DASD space. For more information, see the description of the basic and detailed history panels in Appendix A of the *Administration Guide*.

## Step 12: Set Up for Multiple CPUs

All users must perform this step.

### Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for information that applies to this step.

## Define ENQs to the System Integrity Product

The product issues ENQs and RESERVEs as necessary to maintain the integrity of its data sets. CA Deliver uses the primary ENQ (QNAME=RMOSTC) during startup and shutdown to serialize control block updates.

- This enqueue is defined as SYSTEM to prevent a second CA Deliver from starting on this LPAR with the same characteristics. This ENQ does not have to be defined to a system integrity product.
- A second ENQ (QNAME=RMOCKPT) is used during the OPEN and CLOSE of the checkpoint file. This ENQ does not need to be defined to a system integrity product.
- The RESERVE issued by CA Deliver is normally short-lived but will cause deadlock conditions unless it is properly defined. The RESERVEs should be converted to global enqueues; however, if your environment dictates, the reserves do not have to be converted.

If the CA Deliver database and the checkpoint file are on dedicated volumes with no other datasets, you do not have to convert RESERVEs to global enqueues.

## Using RESERVE and ENQ

This table shows how CA Deliver uses ENQ and RESERVE.

QNAME	Type	Description	Integrity Product Control
RMOSTC	ENQ	Serializes control block updates during startup and shutdown	NO
RMOCKPT	ENQ	Serializes the CA Deliver checkpoint during open and close	NO
RMOUPD	RESERVE	Serializes the updating of the CA Deliver database	YES/NO (if environment dictates)

## Database Extent Considerations

In a multiple CPU environment, it is possible that processes in each system image are accessing a database extent. To minimize contention, we recommend:

- Place each database extent on a dedicated volume.



- Where it is possible, match the size of the volume and the size of the database extent.

This matching allows each extent to be accessed by its own server (device address). I/Os for multiple extents are prevented from queuing on the same device address, which can happen if multiple database extents are allocated on the same device.

## Step 13: (Optional) Construct the Initial Report and Job Data

Perform this step if you want to construct initial report and job data in the database from an existing JCL library. Otherwise, skip this step.

Two utilities, RMOJCL and RMOJCS are supplied with CA Deliver to create report and job definitions in the database from the job's JCL.

**Note:** For more information about utilities, see these topics in the chapter "Utilities" in the *Reference Guide*:

- RMOJCL – Automatic Database Construction from JCL
- RMOJCS – Enhanced Database Construction from JCL

**Note:** The JCLCheck Common Component is no longer distributed as part of the CA Deliver Distribution Libraries. We recommend that clients who use the RMOJCS utility refer to the CA JCLCheck Common Component Installation documentation.

## Step 14: Set Up the Viewing Interface

All CA View users must perform this step.

### Upgrade Considerations

If you are upgrading, see the chapter "Upgrading from a Prior Release" for information that applies to this step.

To set up an interface between CA Deliver and CA View, run the SARINIT initialization utility to add this initialization option to CA View:

```
EXPRESS=DB.HLQ
```

**Note:** For more information about how to execute SARINIT, see the *CA View Reference Guide* and the *CA View Installation Guide*.

## Step 15: (Optional) Install User Exits and Authorization Tables

If this is a new installation, skip this step until you have thoroughly tested CA Deliver and are familiar with the product.

### Upgrade Considerations

For each user exit that you have tailored you must update the new CA Deliver skeleton version and assemble it using the macros in CAI.CVDEMAC.

**Note:** For more information about how to upgrade, see the chapter "Upgrading from a Prior Release".

### User Exits

CA Deliver contains several optional user exits, most of which can be modified. For more information about these exits, see the *Reference Guide*.

CAI.CVDEOPTN contains USERMODs that are used to modify and install these exits.

Exits can also be installed outside of SMP using the NON-SMP JCL contained in CAI.CVDEJCL.

The exits and their USERMODs are as follows:

Exit Name	USERMOD	NON-SMP
RMOATHUX	BRNSATHX	BRNJATHX
RMOBPCUX	BRNSBPCX	BRNJBPCX
RMOBPTUX	BRNSBPTX	BRNJBPTX
RMODSCUX	BRNSDSCX	BRNJDSCX
RMOFSSUX	BRNSFSSX	BRNJFSSX
RMOJ2XIT	BRNSJ2X	BRNJJ2X
RMOJCLUX	BRNSJCLX	BRNJJCLX
RMOOMSUX	BRNSOMSX	BRNJOMSX
RMOPRBUX	BRNSPRBX	BRNJPRBX
RMORECUX	BRNSRECX	BRNJRECX
RMORPTUX	BRNSRPTX	BRNJRPTX
RMORPUX	BRNSRPX	BRNJRPUX
RMORRQUX	BRNSRRQX	BRNJRQX

Exit Name	USERMOD	NON-SMP
RMOSMFUX	BRNSSMFX	BRNJSMFX
RMOSUBUX	BRNSSUBX	BRNJSUBX
RMOUSRUX	BRNSUSRX	BRNJUSRX
RMOUSTUX	BRNSUSTX	BRNJUSTX
RMOUSXUX	BRNSUSXX	BRNJUSXX

Use USERMOD BRNSFSSX in CAI.CVDEJCL to modify user exit RMOFSSUX. However, RMOFSSUX must be assembled and linked outside of SMP.

**Note:** For more information about the JCL needed to install this exit, see the *CA Deliver Reference Guide*.

## Authorization Tables

You can define a separate authorization table for each CA Deliver database.

**Note:** For more information about how to define and install the authorization tables, see the *Reference Guide*.

## Step 16: (Optional) Install Optional Online Interfaces

Perform this step if you want to install any of the optional online interfaces; otherwise go to the next step.

**Note:** For more information about how to install optional online interfaces, see the chapter "Installing Online Interfaces."

## Step 17: (Optional) Install Optional Features

Perform this step if you want to install any of the optional features; otherwise go to the next step.

**Note:** For more information about how to install optional features, see the chapter "Installing Features."

## Upgrade Considerations

If you are upgrading, see the "Upgrading from a Prior Release" chapter for information about this step.



# Chapter 8: Migration Information

---

This section contains the following topics:

[Migration Considerations](#) (see page 109)

[Upgrading from CA Deliver Release 11.5, Release 11.6, and Release 11.7](#) (see page 109)

## Migration Considerations

Describe what you are migrating and the things to consider when you migrate existing configuration and data, for example, changes to:

- Security requirements
- System parameter usage
- Data tables

This section contains the information you need to upgrade to CA Deliver Version 12.0 from CA Deliver Release 11.7, r11.6, or r11.5.

For an overview of the changes in this release, see the Release Notes.

**Note:** If you are upgrading a pre-r11.5 database, the database must be upgraded first to r11.5, r11.6 or r11.7 with the r11.5, r11.6 or r11.7 utilities, and then to Version 12.0.

## Upgrading from CA Deliver Release 11.5, Release 11.6, and Release 11.7

Use these instructions to upgrade to CA Deliver Version 12.0 from CA Deliver Release 11.5, Release 11.6, or Release 11.7. The instructions consist of the original steps and a series of modifications.

To upgrade to Version 12.0, use the steps in these chapters:

- "Installing Your Product Using CA MSM", "Installing Your Product From Pax-Enhanced Electronic Software Delivery", or "Installing Your Product From Tape"
- "Configuring Your Product"
- "Installing Online Interfaces,"
- "Installing Features"

The steps must be modified according to the supplementary instructions in the tables in the following sections:

- Installation Steps to Upgrade to Version 12.0
- Configuration Steps to Upgrade to Version 12.0

Be aware that existing Release 11.5, Release 11.6, or Release 11.7 users are going to install the product using almost the same methods, as new users, with one exception—instead of creating a database you are going to version your existing database. This process updates several records in the database and is expected to execute in a few minutes.

Before upgrading your CA Deliver database, be certain that:

- The started task from the previous release has been withdrawn from the system by one of these methods:
  - The F RMOSTC,OFF operator command has been entered
  - An initial program load of the system was performed
- All application jobs containing reports that are distributed by CA Deliver are completed before CA Deliver Version 12.0 is started.
- All bundles have been completed.

**Important!** Failure to follow these procedures can result in lost bundles and abends in your application jobs.

**Note:** To revert to Release 11.7, r11.6, or r11.5 see the chapter *Reverting to a Prior Installation*.

## Installation Steps for Upgrading to Version 12.0

To upgrade to Version 12.0, you must perform each installation step exactly as it is presented in the appropriate Installation chapter, unless the step has upgrade instructions in the table that follows.

The Step column lists the installation step in the chapter "Installation" and the Upgrade Instructions column explains what you must do if the step needs to be modified or replaced.

Installation Step	Supplementary Upgrade Instructions
Step BRN1ALL	Comment out or delete the allocations for any existing libraries. If you are upgrading from r11.7, and the panel libraries are sufficiently allocated, skip this step.
Step BRN2CSI	<ul style="list-style-type: none"> <li>■ Comment out or delete the allocations for any existing libraries.</li> <li>■ Comment out or delete the step that creates the CSI.</li> <li>■ Change all ADD statements to REP statements.</li> <li>■ If you are upgrading from r11.7, skip this step.</li> </ul> <p><b>Note:</b> The default middle level qualifier name of the SMP/E CSI has been removed beginning with release r11.6.</p> <p>If you are upgrading from a previous release, be sure that the correct, complete name of your CSI is specified in the PARM= value on the execute card.</p>
Step BRN3RECD or BRN3RECT, BRN4APP, BRN5ACC	<p>No supplementary instructions.</p> <p><b>Note:</b> Be aware that the default middle level qualifier name of the SMP/E CSI has been removed beginning with release r11.6.</p> <p>If you are upgrading from a previous release, be sure that the correct, complete name of your CSI is specified in the PARM= value on the execute card.</p>

## Configuration Steps to Upgrade to CA Deliver Version 12.0 without CA MSM

To upgrade to Version 12.0, you must perform each installation step exactly as it is presented in the "Configuring Your Product" chapter unless the step has upgrade instructions in the table that follows.

The Step column lists the installation step in the "Installation" chapter and the Upgrade Instructions column explains what you must do if the step needs to be modified or replaced.

Step	Upgrade Instructions
Steps 1-2	No supplementary instructions
Step 3	<p>Define Security Rules</p> <p>If you modified the RMOATHUX authorization user exit or installed authorization tables, copy your changes into to the new CA Deliver skeleton version and assemble them in Step 23.</p> <p>If you have external security rules, review the "Security" chapter in the <i>CA Deliver Reference Guide</i> to determine if new security rules are necessary.</p>

---

Step 4	<p>Optionally, set the version of your database up to Version 12.0. Version 12.0 provides full compatibility with releases r11.5, r11.6, and r11.7 databases.</p> <p>If you want to utilize specific Version 12.0 features the database must be upgraded to Version 12.0.</p> <p><b>Note:</b> If you do not want to upgrade your release r11.5, r11.6, or r11.7 database, skip this step.</p> <p>This step replaces the Create the Database step in the chapter "Installation." Be aware of the following:</p> <ul style="list-style-type: none"><li>■ Instead of creating a CA Deliver database, you use the VERSION control statement of the RMODBASE utility to version your database to Version 12.0. You can tailor and submit CAI.CVDEJCL(HBRNVERS).</li><li>■ The high-level name of the database must have been previously defined with the NAME control statement (or the PARM parameter of the EXEC JCL statement) for the RMODBASE utility. The format of the VERSION control statement is:</li></ul> <p>Version 12.0</p> <p>For more information, see the RMODBASE Utility section in the chapter "Database Utilities" in the <i>CA Deliver Reference Guide</i>.</p> <p><b>Note:</b> Save your initialization parameter settings; some parameter settings have been added or eliminated in Version 12.0, and you may need the original settings if you have to revert to releases r11.5, r11.6, or r11.7.</p>
Step 5	<p>Create the Initialization Parameter Statements</p> <p>Follow the instructions in the "Installation" chapter. Some initialization parameters have been added, changed, or eliminated in Version 12.0.</p> <p>Be sure to review the initialization parameters presented in the chapter "Initialization Parameters" in the <i>CA Deliver Reference Guide</i>.</p> <p>For information about all initialization parameter changes, see the <i>CA Deliver Release Notes</i>.</p> <p>Save a copy of your initialization parameters in case you have to revert to releases r11.5, r11.6, or r11.7.</p>
Step 6	No supplementary instructions

---



Step 7	<p>Load Online Panels and the JCL Library</p> <ul style="list-style-type: none"> <li>■ If online panel members were customized in releases r11.5, r11.6, or r11.7, copy those members to the appropriate Version 12.0 online library.</li> <li>■ If the customized panels are maintained in a separate library, load those online panel members after loading the Version 12.0 panel members to the database.</li> </ul> <p>Follow the instructions in the "Installation" chapter and load the online panels to the database. Because some online panels have changed, you must OLOAD the new panels.</p> <p><b>Important!</b> Only perform to the OLOAD of the new panels if the database has been versioned to Version 12.0.</p>
Step 8	<p>Load the Model Banner Pages</p> <ul style="list-style-type: none"> <li>■ If model banner page members were customized or added in releases r11.5, r11.6, or r11.7, copy those members to the Version 12.0 model banner page library.</li> <li>■ If the customized banner pages are maintained in a separate library, load those banner page members after loading the Version 12.0 banner page members to the database.</li> </ul> <p>Follow the instructions in the "Installation" chapter and load the model banner panels to the database.</p>
Step 9	<p>Add the Start Procedure to PROCLIB</p> <p>Follow the instructions in the "Installation" chapter and add or adjust the start procedure in the PROCLIB.</p> <p>Be sure that STEPLIB points to the new CAI.CVDELOAD.</p>
Steps 10-11	No supplementary instructions
Step 12	<p>Set Up for Multiple CPUs</p> <p>Follow the instructions in the chapter "Installation." If you use a system integrity product, make the changes needed to accommodate the new CA Deliver database.</p> <p><b>Note:</b> There have been no changes to the way releases r11.5, r11.6, and r11.7 interact with products of this type, so changes should be minimal.</p> <p>Be aware of the following:</p> <ul style="list-style-type: none"> <li>■ No active tasks can be running that point to the CVDELOAD and database that are being upgraded.</li> <li>■ If multiple versions of CA Deliver are running on multiple CPUs and share the same database, all PROCs, JCL, CLISTS, and so forth, that access a given CA Deliver database must also be upgraded.</li> </ul>
Step 13	No supplementary instructions

Step 14	<p>Set up the Viewing Interface</p> <p>Skip this step if the Deliver databases have already been defined to CA View.</p>
Step 15	<p>Replace or Modify User Exits (Optional)</p> <p>If you modified any of the CA Deliver user exits perform this step; otherwise, go to the next step. Note the following:</p> <ul style="list-style-type: none"><li>■ For each user exit that you tailored in release r11.5, r11.6, or r11.7, you must copy your changes to the new CA Deliver skeleton version and assemble it.</li><li>■ All modifications to these exits must be done as an SMP/E USERMOD with the load module installed into CVDELOAD.</li><li>■ For your convenience, CVDEOPTN members are provided for all of the user exits.</li></ul> <p>Save a copy of your user exits in case you need to revert to release r11.5, r11.6, or r11.7. For more information about user exits, see the chapter "User Exits" in the <i>Reference Guide</i>.</p>
Step 16	<p>No supplementary instructions</p>
Step 17	<p>Install Optional Features (Optional)</p> <p>Review the chapter "Installing Features".</p> <p>Verify that the LMP key has been supplied for each feature that you want to install (see the Enter the LMP Code step in the "Installation" chapter), then follow the installation instructions in the chapter "Installing Features."</p> <p>Be sure that all STEPLIB statements in your JCL reference the new CAI.CVDELOAD.</p> <p>There has been a minor change to cross-memory (one of the CA Deliver optional features):The cross-memory task program name has been changed to ECODRV. Any JCL that contains the earlier release names, must be changed to ECODRV.</p> <p>For more information about installing cross-memory services, see the "Installing Online Interfaces" chapter.</p>

# Chapter 9: Reverting to a Prior Installation

---

This section provides the instructions to use to revert to Release 11.7, Release 11.6, or Release 11.5.

This section contains the following topics:

[Revert to Release 11.7](#) (see page 115)

[Reverting to Release 11.6](#) (see page 115)

[Reverting to Release 11.5](#) (see page 116)

## Revert to Release 11.7

**Follow these steps:**

1. Use the CA Deliver Version 12.0 RMODBASE utility to set the version of your CA Deliver database back to a CA Deliver Release 11.7 database.  
The format of the VERSION control statement is:  
VERSION 11.7
2. Use the CA Deliver Release 11.7 RMODBASE utility to OLOAD the Release 11.7 online panel library into your database.
3. Use the CA Deliver Release 11.7 release RMODBASE utility to BLOAD the Release 11.7 banner page library to your database.
4. If you modified any of the CA Deliver user exits, revert to your Release 11.7 versions of the exits.
5. Change your JCL, Procs, and started task JCL to point to the Release 11.7 libraries.
6. If the Version 12.0 load library was link listed, revert to the Release 11.7 link listed library.

## Reverting to Release 11.6

**Follow these steps:**

1. Use the CA Deliver Version 12.0 RMODBASE utility to set the version of your CA Deliver database back to a CA Deliver Release 11.6 database.

The format of the VERSION control statement is:

VERSION 11.6

2. Use the CA Deliver Release 11.6 RMODBASE utility to OLOAD the Release 11.6 online panel library into your database.
3. Use the CA Deliver Release 11.6 RMODBASE utility to BLOAD the Release 11.6 banner page library to your database.
4. If you modified any of the CA Deliver user exits, revert to your Release 11.6 versions of the exits.
5. Change your JCL, Procs, and started task JCL to point to the Release 11.6 libraries.
6. If the Version 12.0 load library was link listed, revert to the Release 11.6 link listed library.

## Reverting to Release 11.5

**Follow these steps:**

1. Use the CA Deliver Version 12.0 RMODBASE utility to set the version of your CA Deliver database back to a CA Deliver Release 11.5 database.

The format of the VERSION control statement is:

```
VERSION 11.5
```

2. Use the CA Deliver Release 11.5 RMODBASE utility to OLOAD the release 11.5 online panel library into your database.
3. Use the CA Deliver Release 11.5 RMODBASE utility to BLOAD the release 11.5 banner page library to your database.
4. If you modified any of the CA Deliver user exits, revert to your release 11.5 versions of the exits.
5. Change your JCL, Procs, and started task JCL to point to the release 11.5 libraries.
6. If the Version 12.0 load library was link listed, revert to the release 11.5 link listed library.

# Chapter 10: Installing Online Interfaces

---

This section contains the following topics:

[How to Complete Configuration of the XMS Online Interfaces With CA MSM](#) (see page 117)

[How to Configure the Online Interfaces Without CA MSM](#) (see page 146)

[Prepare to Start the Cross Memory Task](#) (see page 208)

[Start the Cross Memory Task](#) (see page 208)

## How to Complete Configuration of the XMS Online Interfaces With CA MSM

These steps are configured automatically by the EBC Common Component Configuration Option:

- XMS Startup PROC
- Initialization Parameter Statements
- Modify, Assemble and Link of the ECOXMCTR Module
- Definition of Transactions and Programs to CICS

The EBC Common Component Configuration Option also includes several other external tasks that are required to complete the configuration.

## Define Security Requirements

**Follow these steps to define security requirements for CA Top Secret Security (eTrust CA Top Secret) security:**

1. Rename the existing facility in the facility matrix table if you do not have a facility defined for RMOXMS:  
  
user1=NAME=RMOXMS
2. Verify that the correct PGMname is defined for the new facility, where PGMname is either the first three characters or all the eight characters of the program name that is going to make security calls (ECO or ECODRV).
3. Create region ACID for the facility:

```
TSS CRE(rmoxms) pass(nopw,0) type(user) dept(dept)
mastfac(rmoxms) NODSNCHK NORESCHK NOVOLCHK NOLCFCHK NOSUBCHK
```

4. Define the RMOXMS STC to the TSS STC record:

```
TSS ADDTO(STC) PROCNAME(rmoxms) ACID(rmoxms)
```

5. Give access to the ACIDs required to sign on to this facility:

```
TSS ADD(ACID) FAC(rmoxms)
```

## Install the ISPF/Cross-Memory Online Retrieval Option

The ISPF/Cross-Memory Online Retrieval Option runs under IBM's ISPF for z/OS Version 3.0 and higher.

**Important!** This interface requires Cross-memory services to be already installed. For more information, see [Install Cross-Memory Services](#) in this chapter.

**Note:** In the JCL for the cross-memory services task, the parameter XMSSUB must be set to YES.

### Installation Steps

The following steps are required to install the ISPF/cross-memory online retrieval option. Each step is explained in detail later in the sections that follow.

1. (Optional) Add STEPLIB DD statements to the TSO LOGON procedures if the load modules were not copied to a linklist library.
2. Add the panel and command table libraries to the TSO LOGON procedures.
3. (Optional) Modify an ISPF Selection Menu to Select Online Retrieval feature.

### Step 1: (Optional) Add STEPLIB DD Statements to the TSO LOGON Procedures

The action you take in this step depends on what you did during the base-product installation—specifically, did you:

- Authorize the program load library, or
- Copy the modules to a system authorized library.

If the CA Deliver load modules were *not* copied to one of the libraries in the linklist, proceed with this step; otherwise go to the next step.

For this interface, the libraries do not have to be APF authorized. Authorization is provided in the cross-memory installation. Multiple versions of this online interface can coexist in one TSO library concatenation.

Do *one* of the following:

- Add a STEPLIB DD statement for the library that contains the load modules to the LOGON procedures for those TSO users who are going to use the ISPF/cross-memory online retrieval option.
- Provide the load library using the ISPF LIBDEF facility.

**Note:** If multiple versions of CA Deliver are going to be running simultaneously, or you want to also run a previous version of RMOSPF or RMOTSO, concatenate the load library you want RMOSPF or RMOTSO to use first.

**More information:**

[Step 6: Modify the Skeleton JCL](#) (see page 96)

## Step 2: Add Panel and Command Table Libraries to TSO LOGON

If you are going to run CA Deliver under ISPF, proceed with this step. For Version 3 or higher, both the command table library and the panel library are used.

To add panel and command table libraries to the TSO LOGON procedure:

1. Concatenate the command table library CAI.CVDETBLO to DD statement ISPTLIB.
2. Concatenate the panel library CAI.CVDEPNLO to DD statement ISPLLIB.

**Note:** If you also plan to use RMOSPF (the ISPF interface), and multiple versions of CA Deliver, concatenate CAI.CVDETBLO first. Use the CAI.CVDETBLO from the most current release.

## Step 3: (Optional) Modify an ISPF Selection Menu to Select Online Retrieval

If you want to add a selection code to one of the ISPF selection menus for the online retrieval feature, proceed with this step; otherwise, your ISPF detailed instructions are complete.

**Note:** If you add a selection code, you are able to select the online retrieval feature in the same way you select other ISPF options.

Use the value next to the NAME parameter on your Initialization Parameter Worksheet for PARM (high-level database name).

Use the values in this table for either SPF or ISPF.

Type	Selection Code is Defined As
ISPF (all versions)	'PGM(ECOXMSPF) PARM(high-level-database-name) NEWAPPL(RMO)'
SPF	'PGM(ECOXMSPF) PARM(high-level-database-name)'

## Panel Libraries

The names of the panel libraries vary from site to site and for the different releases of ISPF. These panel libraries are allocated to the ISPLIB DD statement under TSO.

Be aware that some installations do not allow direct modifications of IBM panels and libraries. In this case, you can place the modified panels in user or site-specific libraries and concatenate them ahead of the IBM libraries.

Ask your system administrator for the specific ISPF panel library that applies to your site and contains the panel ISR@PRIM.

**Note:** The selection menus shown in these examples are part of the program product ISPF and are copyrighted by IBM.



## Example 1

This example shows you how to add selection code R to the primary option menu ISR@PRIM for ISPF. The bright, offset text identifies the inserted lines.

```
----- ISPF/PDF PRIMARY OPTION MENU -----
%OPTION ==>_ZCMD
%
%                                +USERID  - &ZUSER
% 0 +ISPF PARS  - SPECIFY TERMINAL AND USER PARAMETERS +TIME    - &ZTIME
% 1 +BROWSE    - DISPLAY SOURCE DATA OR OUTPUT LISTINGS +TERMINAL - &ZTERM
% 2 +EDIT      - CREATE OR CHANGE SOURCE DATA          +PF KEYS  - &ZKEYS
% 3 +UTILITIES - PERFORM UTILITY FUNCTIONS
% 4 +FOREGROUND - INVOKE LANGUAGE PROCESSORS IN FOREGROUND
% 5 +BATCH     - SUBMIT JOB FOR LANGUAGE PROCESSING
% 6 +COMMAND   - ENTER TSO COMMAND, CLIST, OR REXX EXEC
% 7 +DIALOG TEST - PERFORM DIALOG TESTING
% 8 +LM UTILITIES- PERFORM LIBRARY ADMINISTRATOR UTILITY FUNCTIONS
% C +CHANGES  - DISPLAY SUMMARY OF CHANGES FOR THIS RELEASE
% R +RMOSPF    - DELIVER ADMINISTRATION
% T +TUTORIAL  - DISPLAY INFORMATION ABOUT ISPF/PDF
% X +EXIT      - TERMINATE ISPF USING LOG AND LIST DEFAULTS
%
+ENTER%END+COMMAND TO TERMINATE ISPF.
)INIT
  .HELP = ISR00003
  &ZPRIM = YES      /* ALWAYS A PRIMARY OPTION MENU */
  &ZHTOP = ISR00003 /* TUTORIAL TABLE OF CONTENTS */
  &ZINDEX = ISR91000 /* TUTORIAL INDEX - 1ST PAGE */
)PROC
  &ZSEL = TRANS( TRUNC (&ZCMD, '.' )
    0, 'PANEL(ISPOPTA)'
    1, 'PGM(ISRBRO) PARM(ISRBR001)'
    2, 'PGM(ISREDIT) PARM(P,ISREDM01)'
    3, 'PANEL(ISRUTIL)'
    4, 'PANEL(ISRFPA)'
    5, 'PGM(ISRJB1) PARM(ISRJPA) NOCHECK'
    6, 'PGM(ISRPTC)'
    7, 'PGM(ISPYXDR) PARM(ISR) NOCHECK'
    8, 'PANEL(ISRLPRIM)'
    C, 'PGM(ISPTUTOR) PARM(ISR00005)'
    R, 'PGM(EC0XMSPF) PARM(RM0.SYSTEM1) NEWAPPL(RM0)'
    T, 'PGM(ISPTUTOR) PARM(ISR00000)'
    ' ', ' '
    X, 'EXIT'
    *, '?' )
  &ZTRAIL = .TRAIL
)END
```

**Note:**

- NEWAPPL(RMO) is required and must be specified as shown previously in this section.

This parameter is used with the command table library concatenation from Step 3 of the ISPF Installation Instructions.

- NEWAPPL(RMO) allows CA Deliver to correctly interpret commands and program function key invocation.

If this parameter is not specified, certain PF keys such as the scroll keys may not function.

## Example 2

This example shows you how to add selection code R to the primary option menu ISP@PRIM for SPF. Shading identifies the inserted lines.

```
%----- SPF-MVS PRIMARY OPTION MENU -----
%OPTION ==> _OPT
%
%                                +USERID -
% 0 +ISPF PARMs - SPECIFY TERMINAL AND USER PARAMETERS +TIME -
% 1 +BROWSE - DISPLAY SOURCE DATA OR OUTPUT LISTINGS +TERMINAL -
% 2 +EDIT - CREATE OR CHANGE SOURCE DATA +PF KEYS -
% 3 +UTILITIES - PERFORM SPF UTILITY FUNCTIONS
% 4 +FOREGROUND - COMPILE, ASSEMBLE, OR DEBUG
% 5 +BACKGROUND - COMPILE, ASSEMBLE, OR LINK EDIT
% 6 +COMMAND - ENTER TSO COMMAND OR CLIST
% 7 +SUPPORT - TEST DIALOG OR CONVERT MENU/MESSAGE FORMATS
% 8 +LM UTILITIES- PERFORM LIBRARY ADMINISTRATOR UTILITY FUNCTIONS
% R +RMOSPF - DELIVER ADMINISTRATION
% T +TUTORIAL - DISPLAY INFORMATION ABOUT SPF
% X +EXIT - TERMINATE SPF USING LIST/LOG DEFAULTS
%
+PRESS%END KEY TO TERMINATE SPF+
%
)INIT
.HELP = TTUTOR
&ZHTOP = TTUTOR /* TUTORIAL TABLE OF CONTENTS */
&ZHINDEX = TINDEX /* TUTORIAL INDEX - 1ST PAGE */
)PROC
&ZSEL = TRANS( TRUNC (&OPT, '.')
               0, 'PANEL(ISPOPT)'
               1, 'PGM(ISRBRO)'
               2, 'PGM(ISPEDIT)'
               3, 'PANEL(ISPUTIL)'
               4, 'PANEL(ISPFORA)'
               5, 'PANEL(ISRJOB)'
               6, 'PGM(ISPTS0)'
               7, 'PANEL(ISPOTAC)'
               R, 'PGM(EC0XMSPF) PARM(RMO.SYSTEM1)'
               T, 'PGM(ISPTUTOR) PARM(T)'
               ' ', ' '
               X, 'EXIT'
               *, '?' )
)END
```

## Example 3

This example shows you how to add selection code 3.R as a sub-option to the utilities menu ISPUTIL for ISPF.

The bright, offset text identifies the inserted lines.

```

%----- UTILITY SELECTION MENU -----
%OPTION ==>_OPT      +
%
% 1 +LIBRARY          LIBRARY UTILITY:
+                      PRINT INDEX LISTING OR ENTIRE DATASET
+                      PRINT, RENAME, DELETE, OR BROWSE MEMBERS
+                      COMPRESS DATASET
% 2 +DATASET          DATASET UTILITY:
+                      DISPLAY DATASET INFORMATION
+                      ALLOCATE, RENAME, OR DELETE ENTIRE DATASET
+                      CATALOG OR UNCATALOG DATASET
% 3 +MOVE/COPY        MOVE OR COPY MEMBERS OR DATASETS
% 4 +CATALOG          CATALOG MANAGEMENT:
+                      DISPLAY OR PRINT CATALOG ENTRIES
+                      INITIALIZE OR DELETE USER CATALOG ALIAS
% 5 +RESET            RESET STATISTICS FOR MEMBERS OF ISPF LIBRARY
% 6 +HARDCOPY          INITIATE HARDCOPY OUTPUT
% 7 +VTOC             DISPLAY OR PRINT VTOC ENTRIES FOR A DASD VOLUME
% 8 +OUTLIST           DISPLAY, DELETE, OR PRINT HELD JOB OUTPUT
% 9 +SCRIPT/VS         FORMAT, DISPLAY, AND OPTIONALLY PRINT SCRIPT TEXT
% R +RMOSPF           DELIVER ADMINISTRATION
)INIT
  .HELP = TU
)PROC
  &SEL = TRANS( TRUNC (&OPT, '.')
    1, 'PGM(ISPUDA) PARM(UDA1)'
    2, 'PGM(ISPUDA) PARM(UDA1)'
    3, 'PGM(ISPUMC)'
    4, 'PGM(ISPUCA)'
    5, 'PGM(ISPURS)'
    6, 'PGM(ISPUHC)'
    7, 'PGM(ISPUVT)'
    8, 'PGM(ISPUOL) PARM(UOL01)'
    9, 'PGM(ISPUSC) PARM(SCRPTA)'
    R, 'PGM(EC0XMSPF) PARM(RMO.SYSTEM1) NEWAPPL(RMO)'
    ' ', ' '
    *, '?' )
)END

```

## ISPF Cross-Memory Notes

Be aware of the following:

- The primary RMOXMS region must be started with the XMSSUB=YES parameter.
- The XMSSUB=YES parameter must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.

Only the primary XMS region can have XMSSUB=YES specified.

- The XMS regions must have the XMS=YES parameter to make it accessible.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA Deliver and CA View database high-level qualifiers. The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database as follows:

- SUBSYS= parameter of the cross-memory task must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- RECON=YES can be used to allow reconnection (after an ISPF terminal error) at the point of exit.
- TIMEOUT= specifies how long ISPF will wait for the XMS session to respond after the user enters input, in seconds.

We recommend as high a value as possible but not less than 240 (4 minutes).

To abort the XMS session and return the user to ISPF or the TSO command prompt, press the ATTN key.

**Note:** The SUBMAX= parameter controls the number of user connections, not the USERMAX= parameter. USERMAX= only applies when you are using the subtask with the CICS interface.

## Install the TSO/Cross-Memory Online Retrieval Option

**Important!** This interface requires cross-memory services to be installed. For more information, see the topic [Installing Cross-Memory Services](#) in this chapter.

**Note:** The parameter XMSSUB must be set to YES in the JCL for the cross-memory services task.

## Installation Steps

The following steps are required to install the TSO/Cross-Memory Online Retrieval Option. Each step is explained in detail in the sections that follow.

1. (Optional) Add STEPLIB DD Statements to the TSO LOGON procedures if the load modules were not copied to a linklist library.
2. (Optional) Create user CLISTs to execute the CA Deliver TSO/XMS driver program.

### Step 1: (Optional) Add STEPLIB DD Statements

The action you take in this step depends on what you did during the base-product installation—specifically, did you:

- Authorize the program load library or
- Copy the modules to a system authorized library

If the CA Deliver load modules were *not* copied to one of the libraries in the linklist, proceed with this step; otherwise go to the next step.

To add STEPLIB DD statements (for the library containing the CA Deliver load modules) to the TSO LOGON procedures, do the following:

- Add a STEPLIB DD statement for the library that contains the CA Deliver load modules to the LOGON procedures for those TSO users who are to use the ISPF/Cross-Memory Online Retrieval Option.

**Note:** For this interface, the libraries do not have to be APF authorized—authorization is provided in the cross-memory installation. Multiple releases of this online interface can coexist in one TSO library concatenation.

### Step 2: (Optional) Set up the TSOXMS Driver Program

To create user CLISTs to execute the CA Deliver TSOXMS driver program, issue:

```
EC0XMTSO highlevel.databasesname
```

## TSO Cross-Memory Notes

Be aware of the following:

- The primary RMOXMS region should be started with the XMSSUB=YES parameter.
- The XMSSUB=YES parameter must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.

Only the primary XMS region can have XMSSUB=YES specified.

- The XMS regions must have the XMS=YES parameter to make it accessible.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA View and CA Deliver database high-level qualifiers. The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database as follows:

- SUBSYS= parameter of the cross-memory task.  
This parameter must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- RECON=YES can be used to allow reconnection (after a TSO terminal error) at the point of exit.
- TIMEOUT= specifies how long TSO will wait for the XMS session to respond after the user enters input, in seconds.

We recommend as high a value as possible but not less than 240 (4 minutes).

To abort the XMS session and return the user to ISPF or the TSO command prompt, press the ATTN key.

**Note:** The SUBMAX= parameter controls the number of user connections, not the USERMAX= parameter. USERMAX=only applies when you are using the subtask with the CICS interface.

## Install the VTAM Online Retrieval Option

**Important!** This facility uses the cross-memory feature distributed with CA Deliver and must be installed with that feature. For more information about cross-memory feature, see the Install Cross-Memory Services section in this chapter.

## Installation Steps

The following steps are required to install the VTAM online retrieval option. Each step is explained in detail in the sections that follow.

1. Define the APPL definition statement to VTAM.
2. (Optional) Create a USS Table Definition.

### Step 1: Define the Application Program to VTAM

Add this application program definition to SYS1.VTAMLST:

```
* SYS1.VTAMLST(rmomajor)  
rmomajor VBUILD TYPE=APPL  
rmovtam APPL ACBNAME=rmovtam,AUTH=(PASS,ACQ),EAS=nn
```

where:

#### **rmomajor**

Specifies the application program major node name.

Use the SYS1.VTAMLST member name. The member name must be unique and must not be the same as the names on the APPL statement.

#### **AUTH=(PASS,ACQ)**

Is required when the cross-memory parameter VTAMPASS=YES is used to support multiple cross-memory regions.

If VTAMPASS=NO, you can specify AUTH=(ACQ). For more information about the VTAMPASS parameter, see the Add the Start Procedure for the Cross-Memory Online Task step in this chapter.

#### **EAS=nn**

Specifies the approximate number of concurrent sessions.

#### **rmovtam**

Specifies the minor node name of the application program.

- This name must be unique within the network domain; it is the APPLID referenced in the USS definition table or LOGON command.
- This name is also specified on the cross-memory RMOAPPL parameter.
- If not specified, the network-unique name (the name of the APPL definition statement) is used.

### Step 2: (Optional) Create a USS Table Definition

To simplify the manner in which a user logs on to VTAM online retrieval, you can create a USS definition table for CA Deliver.



## Example

Assume that two CA Deliver systems have been created. The databases for the two systems have high-level names of RMO.SYSTEM1 and RMO.SYSTEM2, and you want a user to simply enter one of the commands to log on to VTAM online retrieval for the respective systems:

RM01  
RM02

Create a USS definition table as follows:

```
USSTAB
*
*   ENTRY FOR RM01
*
USSCMD  CMD=RM01,REP=LOGON,FORMAT=PL1
USSPARM PARM=APPLID,DEFAULT=RMOVTAM
USSPARM PARM=LOGMODE
USSPARM PARM=DATA,DEFAULT=RMO.SYSTEM1
*
*   ENTRY FOR RM02
*
USSCMD  CMD=RM02,REP=LOGON,FORMAT=PL1
USSPARM PARM=APPLID,DEFAULT=RMOVTAM
USSPARM PARM=LOGMODE
USSPARM PARM=DATA,DEFAULT=RMO.SYSTEM2
USSEND
```

## VTAM Cross-Memory Notes

Be aware of the following:

- For VTAM only regions, you can start the primary RMOXMS task with the XMSSUB=NO parameter. However if this is not a VTAM only region, we recommend that you start the primary RMOXMS region with the XMSSUB=YES parameter.
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.  
Only the primary XMS region can have XMSSUB=YES specified.
- VTAM only XMS regions can have the XMS=NO parameter to make it accessible.
- All XMS interfaces require the ECOXMCTR table. You must assemble the table during installation to:
  - Define the relationship between CA Deliver and CA View database high-level qualifiers and the session options to be used
  - Provide information used to build the XMS database table. Only the database high-level qualifier is used for VTAM XMS users.
- Specify the RMOAPPL=*applid* parameter. This parameter provides VTAM user signon capability.  
**Note:** When you are using multiple VTAM XMS regions, each region must have a unique *applid*.
- To pass VTAM signon requests to other XMS regions, specify the VTAMPASS=YES parameter.
- When you are using multiple VTAM XMS regions, the values for LGNFMT=, RMOVDTB=, VTMQUERY=, and VTMSAA= must be the same in each region. Otherwise, the XMS interface may react in unpredictable ways.
- To activate the VTAM generic resource support for your cross memory regions, specify the VGRAPPL= parameter.

**Note:** For more information about VTAM generic resources, see the following topic.

## VTAM Generic Resource Name

If the VGRAPPL parameter is specified in an EMAS complex, this parameter specifies a common VTAM generic resource name for the entire EMAS complex.

Specifying the common VTAM generic resource name in the session request can initiate VTAM cross memory sessions to any of the EMAS members.

When you are using the VTAM generic resource name, by default VTAM tries to request a session with an EMAS member in the same MVS image.

If it is not possible to get the session that was requested, VTAM uses normal load balancing when passing the session request to one of the active EMAS members.

## Install the CA Roscoe/Cross-Memory Online Retrieval Option

The CA Roscoe/cross-memory online retrieval option runs as a command processor under ETSO/Roscoe.

**Important!** This interface requires cross-memory services to be installed. For more information about cross-memory services, see the [Install Cross-Memory Services](#) section in this chapter. Be sure to set the parameter XMSSUB to YES in the JCL for the cross-memory services task.

### Installation Steps

The following steps are required to install the CA Roscoe/Cross-Memory Online Retrieval Option. Each step is explained in detail in the sections that follow.

1. (Optional) Concatenate the Load Module Library to the ETSOLIB DD statement, if the load modules were not copied to a linklist library.
2. Add the control statement for the RMOROS command processor to the Eligible Program List (EPL).
3. Invoke CA Roscoe/Cross-Memory Online Retrieval.

#### Step 1: (Optional) Concatenate the Load Module Library

If the load modules were *not* copied to a linklist library, concatenate the library that contains the load modules to the ETSOLIB DD statement in the CA Roscoe startup JCL, .

**Note:** If you have CA View, the CA View load modules must also be either in the linklist or in a ETSOLIB statement with this step.

#### Step 2: Add RMOROS Command Processor Statements

**Important!** This step is for CA Roscoe 6.0 and Higher.

Add these EPL control statements to member ETSOPGMS for the CA Roscoe user with the RO prefix:

Column	Contents
1–8	ECOXMROS
9	Blank
10–12	Number of users allowed to access CA Deliver at one time
13	Blank
14–17	CPU time slice (use 9999 to prevent premature termination)
18	Blank

Column	Contents
19–24	Maximum memory (in KB) below the 16 MB line This memory is only for the cross-memory driver program (50 KB is ample)
25	Blank
26–31	Maximum memory (in KB) below the line that CA Deliver can acquire at one time Use 999999 so that GETMAINS are not limited
32	Blank
33–38	Maximum memory (in KB) above the 16 MB line This memory is only for the cross-memory driver program (50 KB is ample)
39	Blank
40–45	Maximum memory (in KB) above the line that CA Deliver can acquire at one time Use 999999 so that GETMAINS are not limited
46	Blank
47–48	CP to call ECOXMROS as a TSO command processor
49	Y – Application authorized to issue MODESET SVC
50	Blank
51–52	CP to call ECOXMROS as a TSO command processor
53–255	Ignored

## CA Roscoe Cross-Memory Notes

Be aware of the following:

- Start the primary RMOXMS region with the XMSSUB=YES parameter.  
The XMSSUB=YES parameter must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.  
Only the primary XMS region can have XMSSUB=YES specified.
- The XMS regions must have the XMS=YES parameter to make it accessible.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA View and CA Deliver database high-level qualifiers.  
The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database as follows:

- SUBSYS= parameter of the cross-memory task.  
This parameter must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- RECON=YES can be used to allow reconnection (after a TSO terminal error) at the point of exit.
- TIMEOUT= specifies how long TSO is to wait for the XMS session to respond after the user enters input, in seconds.  
We recommend as high a value as possible but not less than 240 (4 minutes).

**Note:** The SUBMAX= parameter controls the number of user connections, not the USERMAX= parameter. USERMAX= only applies when using the subtask with the CICS interface.

## Install the CICS Pseudo-Conversational Option

**Important!** This option uses the cross-memory feature distributed with CA Deliver and must be installed with that feature. For more information about cross-memory, see [Install Cross-Memory Services](#).

## Installation Steps

The following steps are required to install the CICS Pseudo-Conversational Option. Each step is explained in detail in the sections that follow.

1. Place the CA Deliver load libraries into DFHRPL and STEPLIB.
2. Code the PCT and PPT Table Entries to CICS.
3. (Optional) Prepare the interface to a user-written CICS menu system.

### Step 1: Add Modules to DFHRPL and STEPLIB

The CA Deliver load library is required in the CICS DFHRPL and in the STEPLIB in the CICS region.

**Note:** If the CAI.CVDELOAD load library is in the linklist, it does not have to be included as a STEPLIB in the CICS region

Be sure that these modules are available in the DFHRPL concatenation of libraries.

1. EC0CICUX
2. EC0CIEND
3. EC0CINIT
4. EC0CISRV
5. EC0XMCIC
6. EC0C*version-number*

Where:

*release-number* represents the CICS release number.

- CTS 3.1 release number: 0640
- CTS 3.2 release number: 0650
- CTS 4.1 release number: 0660
- CTS 4.2 release number: 0670
- CTS 5.1 release number: 0680

You can copy the six modules to the DD statement DFHRPL in your CICS task. However, we strongly recommend that you concatenate CAI.CVDELOAD to the DD statement DFHRPL.

**Note:** Several CA Deliver modules are loaded (MVS load) from the CICS STEPLIB or LINKLIST. Verify that the entire CA Deliver load library is defined in the CICS STEPLIB or is included in the linklist.

## Step 2: Code the PCT and PPT Table Entries to CICS

The CICS transactions and programs were previously defined in the MSM configuration step. Review the following points to determine if they are applicable to your installation.

### CICS Resource Definition Online Storage Protection

If you have CICS storage protection activated, resource definition online settings are required, as follows:

- For all transactions:

```
TASKDATALOC=ANY  
TASKDATAKEY=CICS
```

- For all programs:

```
DATALOCATION=ANY  
EXECKEY=CICS
```

### PLT Start-up List

Add these table entries to the last phase of the PLT startup list to initialize the subtask that is used for cross-memory access:

```
DFHPLT TYPE=ENTRY, PROGRAM=DFHDELIM  
DFHPLT TYPE=ENTRY, PROGRAM=ECOCINIT
```

### PLT Shutdown List

Add these table entries to the first phase of the PLT shutdown list to ensure that the subtask that executes as part of the CA Deliver online facility correctly shuts down when CICS shuts down:

```
DFHPLT TYPE=ENTRY, PROGRAM=ECOCIEND  
DFHPLT TYPE=ENTRY, PROGRAM=DFHDELIM
```

### Optional DCT Entries

Specify a value for the DESTID parameter in the EBCXMOPT macro in the ECOXMCTR module and corresponding DCT entries. This value defines a transient data destination for messages issued by the subtask.

**Note:** Specify a blank for DESTID to suppress the generation of informational messages from the subtask.

The DCT entries for a DESTID of XMC0 are:

```
RMOLOG  DFHDCT TYPE=SDSCI,   FOR CICS MESSAGES AND SHUTDOWN
          BLKSIZE=250,   STATISTICS
          BUFNO=1,
          DSCNAME=RMOLOG,
          RECFORM=VARUNBM,
          RECSIZE=242,
          TYPEFLE=OUTPUT
XMC0G    DFHDCT TYPE=EXTRA,
          DESTID=XMC0,
          DSCNAME=RMOLOG
```

### Step 3: (Optional) Invoke the System from a CICS Menu System

If you want to invoke CA Deliver from a user-written CICS menu system, then return to that menu system when you exit from CA Deliver, do the following:

Invoke CA Deliver from the menu system by using this CICS command:

```
EXEC CICS START TRANSID(DELIVER transaction-id)
      TERMID(EIBTRMID)
      FROM(data-area)
      LENGTH(4)
```

where:

**TRANSID(DELIVER *transaction-id*)**

Specifies the CA Deliver transaction ID.

**TERMID(EIBTRMID)**

Specifies the terminal that a CA Deliver transaction will communicate with.

**FROM (*data-area*)**

Specifies the optional variable length character string.

The format of the *data-area* parameter is:

*tran*,

where:

**tran**

Specifies the return menu CICS transaction to be started when CA Deliver finishes.

**Note:** None of the *data-area* parameters is required.

**LENGTH (4)**

Specifies the number of bytes in the data field being passed.



**Note:**

When CA Deliver receives control, it retrieves the four-byte return transaction ID and saves it from iteration to iteration.

If the retrieve fails, CA Deliver retains the information that it was started directly from a terminal, not a menu system.

When CA Deliver finishes processing, it determines whether it should return to a menu system by starting the return transaction.

If there is a saved transaction ID, CA Deliver starts the return transaction before it exits to CICS by issuing:

```
EXEC CICS START TRANSID(RETURN transaction-id)  
      TERMID(EIBTRMID)  
      NOCHECK
```

## CICS Notes

The cross memory CICS access involves two different address spaces: the CICS address spaces and the XMS address spaces.

## CICS Address Spaces

The user's CICS transactions and the cross memory support subtask reside in the address spaces.

- If multiple CICS regions are used to access CA Deliver, each CICS region will have an XMS support subtask.
- If you are using CICS/MRO, CA Deliver normally runs in an AOR (application region).

## XMS Address Spaces

Be aware of the following:

- The primary RMOXMS region can be started with the XMSSUB=YES or XMSSUB=NO parameter.
- CICS has a router subtask in its region and does not require the XMSSUB=YES function. However, we recommend that you start the primary XMS region with XMSSUB=YES.
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.

Only the primary XMS region can have XMSSUB=YES specified.

- The XMS regions must have the XMS=YES parameter to be accessible.
- The SUBSYS= parameter must match the ECOXMCTR table entry for the CICS transaction.

- The EBCXMCTR table must be assembled during installation to define the relationship between CA View and CA Deliver database high-level qualifiers.

The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database as follows:

- SUBSYS= parameter can be used to route the CA Deliver transaction to an alternate XMS subsystem ID. The SUBSYS= of the cross memory task must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- TRANID=parameter specifies the CA Deliver transaction identifier for CICS.
- RECON=YES can be used to allow reconnection (after a CICS terminal error) at the point of exit.

**Note:** Do not specify RECON=YES if you use a multi-session manager that assigns LU names from a pool of names. Coding RECON=YES under these conditions could allow a user to be connected to another user's session. For more information, see Multi-Session Managers later in this chapter.

- TIMEOUT= specifies how long CICS is to wait for the XMS session to respond after the user enters input, in seconds.

We recommend as high a value as possible but not less than 240 (4 minutes).

## CICS XMS Subtask Startup

Use *one* of these methods to start the XMS subtask automatically:

1. When the CICS region is started, use the DFHPLTPI definition to automatically start the XMS subtask.
2. Define a transaction for the ECOCINIT program to allow for manual startup.
3. Write a CICS program to transfer control (XCTL) to ECOCINIT when you want to start the XMS subtask.

Until the XMS subtask is started, expect the transactions referencing ECOXMCIC to terminate with an error message that indicates that the XMS subtask is not active.

### **Note:**

- When the CICS region is terminated, the DFHPLTSD definition is to be used to terminate the XMS subtask.

You can manually terminate the XMS subtask through a user application program that LINKs the ECOCIEND or you can use the optional transaction defined for ECOCIEND for manual termination.

- If you want to terminate the XMS subtask manually, we recommend that you use the DFHPLTSD entry to terminate the XMS subtask. This definition is needed to clean up linkages to the XMS address spaces.
- To prevent users from shutting down the XMS subtask, secure the optional transaction for program ECOCIEND.

## Multi-Session Managers Using Virtual LU Names

Multi session manager products, for example CA TPX Session Management (CA TPX), can be configured to assign an LU name to a user's terminal at the time the user selects the CICS application.

**Important!** This assignment means that a user can enter CICS each time with a different terminal ID which can cause problems for CA Deliver application.

For example: If a user uses a multi-session manager to end a session, or shuts the PC down, CA Deliver does not know that the user has left. Another user might select CICS, be assigned to the same LU name as the previous user, and enter CA Deliver with the same terminal ID as the previous user. CA Deliver believes that there are two active users on the same terminal.

To prevent this situation, you can add a small amount of code to the CICS Autoinstall Control Program.

**Note:** The default name of this program is DFHZATDX and its source is located in SDFHSAMP.

If you are not a CICS systems programmer, discuss this situation with the person in your company who is responsible for CICS support and maintenance.

The sample code that follows shows how to clear an active user from the CA Deliver application at terminal deletion time. Insert this code in your Autoinstall Control Program.

The source that is shipped with CICS contains this line:

*\* ==> PUT DELETE CODE HERE*

Insert the code after that line.

```
LOAD EP=EC0XSLOC,ERRET=RETURN
LR   R6,R0                GET EBCXSLOC ADDRESS
ICM  R8,B'1111',0(R6)      ADDR OF MAIN CONTROL BLOCK
BZ   RETURN               GET OUT IF NONE
LA   R7,4(,R8)            LOOK LIKE FIRST USER BLOCK
XSU_LOOP DS 0H
ICM  R7,B'1111',8(R7)      USER BLOCK ADDR
BZ   RETURN               GET OUT IF DONE
CLC  DELETE_TERM_ID,104(R7) FOR THIS TERMINAL?
BNE  XSU_LOOP             NO
TM   120(R7),X'01'        ACTIVE ENTRY?
BZ   XSU_LOOP             NO
OI   120(R7),X'02'        SHOW SESSION DONE
B    RETURN               EXIT PROGRAM
```

This code does the following:

1. Attempts to load program ECOXSLOC
  - If the load fails, this is not the region containing CA Deliver and it exits.
  - If CA Deliver is active in this region, the first word of ECOXSLOC contains the address of the main control block.  
If this word is zero, CA Deliver is not active and the program exits.
2. Scans the chain of CA Deliver user control blocks to find the terminal to be deleted
  - If the program finds the terminal ID, it makes sure that the user block is in use and is active, then it clears the appropriate fields.
  - If the block does not represent an active user, the program continues to search the chain to the end.
  - If the program gets to the end of the chain without finding the terminal ID, the program exits.
  - If you implement this change to the terminal deletion section of the Autoinstall Control Program, you can prevent the problems caused by the methods that were used to leave the CA Deliver application.

## Install the IMS Online Retrieval Option

Use these steps to install the IMS online retrieval option.

**Important!** This facility uses the cross-memory feature distributed with CA Deliver and must be installed with that feature. For more information about cross-memory, see *Installing Cross-Memory Services*.

### Installation Steps

This list summarizes the steps required to install the IMS Online Retrieval Option. Detailed instructions are in the sections that follow.

1. Code the IMS TRANSACT, PSB and APPLCTN macros.
2. Run the PSB, ACB, and SYSGEN Procedures.
3. Load ECOIMSUX Modules.
4. Move load modules to IMSVS.PGMLIB.

**Important!** All JCL and macros provided in this section are provided as general examples only and must be modified for your site's systems and standards.

### Step 1: Code the Macros

Use the examples in this section as a guide as you code these macros, and implement them in your IMS system.

- (IMS) TRANSACT macro
- PSB macros
- APPLCTN macro

### TRANSACT Macro

One or more transactions must be defined for the IMS online retrieval program RMOXMIMS. Normally, only one transaction identifier is defined, although you can define multiple transactions.

This TRANSACT macro identifies the RMOXMIMS transaction to IMS:

```
TRANSACT NAME=EC0XMIMS, SPA=(18)
```

### PSB Macros

This PSB must be generated for the ECOXMIMS transaction:

```
PCB          TYPE=TP,ALTRESP=YES,MODIFY=YES
PSBGEN       PSBNAME=EC0XMIMS,LANG=ASSEM,COMPAT=YES
```

## APPLCTN Macro

This APPLCTN must be generated for the RMOXMIMS transaction:

```
APPLCTN    PSB=EC0XMIMS
```

## Step 2: Run the PSB, ACB, and SYSGEN Procedures

Use the macros created in Step 1. Code the Macros as input for these procedures:

```
PSBGEN  
ACBGEN  
IMS  SYSGEN
```

## Step 3: Load ECOIMSUX Modules

Move load modules ECOIMSUX to IMSVS.PGMLIB.

**Note:** ECOIMSUX is in CAI.CVDELOAD and must be copied to IMSVS.PGMLIB.

## IMS Notes (New Version)

Be aware of the following:

- The new IMS/DC Transaction Program (EC0XMIMS) is a replacement for the older RMOXMIMS program.
- The EC0XMIMS does not need to be linkedited to the ASMTDLI interface program. The transaction is now conversational with a SPASIZE=18 (this can be adjusted).
- If you use extended color, the SEGSIZE= may need to be increased, because extended color data streams can be a 50% increase over the monochrome data stream size.

To determine the SEGSIZE= value, take the terminal that will use the interface with the largest screen size, in bytes, and apply this formula:

$$\text{ROWS} * \text{COLS} * 1.5 = \text{SEGSIZE}$$

For example, a 3278-5 with a 27 x 132 screen size would be  $(27 * 132 * 1.5) = 5346$ . If the SEGSIZE= is too small, the terminal user will get an RC= "A6" message indicating that a message insert failed.

## IMS/DC Parameter Relationships

The cross-memory IMS/DC access involves up to three different address spaces as follows:

- IMS/DC message processing region address spaces

The user's IMS/DC transaction resides here. If multiple IMS/DC users are processing concurrently (input being processed by the XMS system), a separate IMS/DC message region is used for each user.

IMS/DC can control the maximum number of IMS/DC transactions executing at one time.

- The XMS support subtask

- The subtask is started when the XMSSUB=YES input parameter is used when an XMS address space is started.
- The subtask can be in a separate XMS address space or share the address space with XMS or VTAM sessions.
- The XMSSUB=YES must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMCO or not specified).
- If multiple XMS address spaces are started, only one can have the XMSSUB=YES specified.

**Note:** All IMS/DC, TSO/XMS, ISPF/XMS and CA Roscoe/XMS sessions share the same XMS subtask.

- XMS address spaces

See the topic that follows.

## IMS/DC Cross-Memory Notes

Be aware of the following:

- The primary RMOXMS region is to be started with the XMSSUB=YES parameter.  
This region can be in a separate XMS address space or share the address space with XMS or VTAM sessions.
- The XMSSUB=YES parameter must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.  
Only the primary XMS region can have XMSSUB=YES specified.
- The XMS regions must have the XMS=YES parameter to make it accessible.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA View and CA Deliver database high-level qualifiers. The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database:

- SUBSYS= parameter of the cross-memory task.  
The parameter must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- RECON=YES can be used to allow reconnection (after an ISPF terminal error) at the point of exit.
- TIMEOUT= specifies how long ISPF is to wait for the XMS session to respond after the user enters input, in seconds.  
We recommend a value as high as possible but not less than 240 (4 minutes).

To abort the XMS session and return the user to ISPF or the TSO command prompt, press the ATTN key.

**Note:** The SUBMAX= parameter controls the number of user connections, not the USERMAX= parameter. USERMAX= only applies when you are using the subtask with the CICS interface.

To control screen size manually, use these operands. The SNA query command can also be used to determine the device characteristics.

Enter	For Terminal Type
M2	3278-2 24 x 80 default screen size
M2H	3278-2 24 x 80 highlighting



Enter	For Terminal Type
M2X	3279-2 24 x 80 color highlighting
M2C	3279-2 24 x 80 color
M3	3278-3 32 x 80
M3H	3278-3 32 x 80 highlighting
M3X	3279-3 32 x 80 color highlighting
M3C	3279-3 32 x 80 color
M4	3278-4 43 x 80 highlighting
M4H	3278-4 43 x 80 highlighting
M4X	3279-4 43 x 80 color highlighting
M4C	3279-4 43 x 80 color
M5	3278-5 27 x 132
M5H	3278-5 27 x 132 highlighting
M5X	3279-5 27 x 132 color highlighting
M5C	3279-5 27 x 132 color
M6	3290 62 x 80
M6H	3290 62 x 80 highlighting
M7	3290 31 x 160
M7H	3290 31 x 160 highlighting
M8	3290 62 x 160
M8	3290 62 x 160 highlighting

For other modifications to your system, see your VTAM programmer.

## Optional Initialization Parameter Statements

The optional initialization parameter statements are delivered as comments in the initialization member RMOPARMS in the CVDEOPTN library.

Review these initialization parameters in the RMOPARMS member after configuration is completed.

**Note:** For more information about the descriptions of these parameters, see the chapter *Initialization Parameters* in the *Reference Guide*.

If any of the parameters are deemed necessary, remove the comment and supply the necessary parameter before you start CA Deliver.

## How to Configure the Online Interfaces Without CA MSM

The topics in this section describe the manual tasks you must perform if you are not using CA MSM to configure your product.

This section also describes the online interface options, the cross-memory drivers, and how to install the online interfaces, including these topics:

- Online and cross-memory interfaces
- Cross-memory drivers for ISPF, TSO, and CA Roscoe interfaces
- Installation of these options:
  - ISPF online retrieval option
  - TSO online retrieval option
  - CA Roscoe online retrieval option
  - Cross-memory services
  - ISPF/cross-memory online retrieval option
  - TSO/cross-memory online retrieval option
  - VTAM online retrieval option
  - CA Roscoe/cross-memory online retrieval option
  - CICS pseudo-conversational option
  - IMS online retrieval option

## Online Interfaces

The following table lists the online interfaces, whether cross-memory services (XMS) must be installed and any special advantages of using the interface.

Online Interface	XMS	Advantages
ISPF	NO	Provides full online access without the need for a cross-memory region
ISPF/XMS	YES	Does not require the STEPLIB to be APF authorized To simplify migration, you can run multiple versions of CA Deliver concurrently.
TSO	NO	Provides full online access without the need for a cross-memory region
TSO/XMS	YES	Does not require the STEPLIB to be APF authorized To simplify migration, you can run multiple versions of CA Deliver concurrently.
VTAM	YES	Supports extended data stream to queriable terminals
CICS	YES	To simplify migration, you can run multiple versions of CA Deliver concurrently
IMS/DC	YES	
CA Roscoe	NO	Provides full online access without the need for a cross-memory region
CA Roscoe/XMS	YES	Does not require the STEPLIB to be APF authorized To simplify migration, you can run multiple versions of CA Deliver concurrently.

## Cross-Memory Services Interface (XMS)

The cross-memory services interface manages several interfaces; this allows you to control online access with a single operator interface. Advantages of the interfaces are discussed later in this chapter.

The parameters in the startup procedure for the cross-memory task allow you to control:

- The maximum number of users allowed on the system
- Whether to cancel users when they are inactive for a specified time (CANCEL and LONGWAIT)

**Note:** For information about startup parameters, see Installing Cross-Memory Services later in this chapter.

The operator commands available to modify the cross-memory task allow you to:

- Cancel users
- Suspend additional logons
- List online usage statistics
- Modify selected cross-memory startup JCL parameters

**Note:** For more information about operator commands, see the chapter "Operator Commands" in the *Reference Guide*.

## Cross-Memory Drivers for Interfaces

You can use cross-memory services drivers to run the TSO, ISPF, and CA Roscoe online interfaces.

The advantages of using these drivers are:

- Users are authorized by cross-memory drivers.

When you use the cross-memory services drivers for the ISPF, TSO, or CA Roscoe interfaces, users are authorized by cross-memory and do not also need authorization from the online interface (for example, TSO).

- Multiple versions of CA Deliver can run simultaneously.

When you use the cross-memory services drivers for the ISPF, TSO, or CA Roscoe interfaces, you can run multiple versions of CA Deliver concurrently. This ability supports migration; it makes it easier to migrate when you are converting to a new version level of CA Deliver.

You can also run multiple versions of the online interfaces simultaneously.

## Restrictions

These restrictions apply when you execute the program using the cross-memory drivers for TSO, ISPF, and CA Roscoe:

- TSO SUBMIT is not used. The SUBMIT occurs from the connected cross-memory region.

- Direct reprints from the user have the JES banner pages of the cross-memory region. The internal system banner page can be used to check the user requesting the reprint.

## User Exits

User exits run in the cross-memory region and do not have access to TSO or CA Roscoe allocations.

## Install the ISPF Online Retrieval Option

The ISPF online retrieval option runs under the IBM Interactive System Productivity Facility (ISPF) for z/OS Version 3.0 and higher.

### Installation Steps

The following steps are required to install the ISPF/cross-memory online retrieval option. Each step is explained in detail later in the sections that follow.

1. (Optional) Add STEPLIB DD statements to the TSO LOGON procedures if the load modules were not copied to a linklist library.
2. Add the panel and command table libraries to the TSO LOGON procedures.
3. (Optional) Modify an ISPF Selection Menu to Select Online Retrieval feature.

### (Optional) Step 1: Add STEPLIB Statements

The action you take in this step depends on what you did during the base product installation—specifically, did you:

- Authorize the program load library or
- Copy the modules to a system-authorized library

If the CA Deliver load modules were *not* copied to one of the libraries in the linklist, proceed with this step; otherwise go directly to the next step.

#### Follow these steps:

1. Add STEPLIB DD statements to the TSO LOGON procedures if the load modules are not in a linklist library.
2. Add a STEPLIB DD statement for the library containing the product's load modules to the LOGON procedures for those TSO users who are going to be using the ISPF online retrieval option.

**Note:** If you have CA View, the CA View load modules must also be either in the linklist or in a STEPLIB statement with this step.

## Step 2: Add the Panel and Command Libraries (ISPF only)

**Note:** If you are running under SPF, go to Step 3.

If you run CA Deliver under ISPF, proceed with this step.

To add the panel and command libraries to the TSO LOGON procedure:

1. Concatenate the command table library CAI.CVDETBLO to DD statement ISPTLIB.
2. Concatenate the panel library CAI.CVDEPNLO to DD statement ISPLIB.

**Note:** If you also plan to use RMOSPF (the ISPF interface), and multiple versions of CA Deliver, concatenate CAI.CVDETBLO first. Use the CAI.CVDETBLO from the most current release.

## Step 3: (Optional) Modify an ISPF Selection Menu to Select Online Retrieval

If you want to add a selection code for the online retrieval feature to one of the ISPF selection menus, proceed with this step; otherwise, your detailed instructions for ISPF are complete.

To define your selection code, use the following command:

```
PGM(RMOSPF) PARM(high-level-database-name) NEWAPPL(RM0)
```

Use the value next to the NAME parameter on your Initialization Parameter Worksheet for PARM (high-level-database-name).

**Note:** Adding a selection code allows you to select the online retrieval feature in the same way you would select other ISPF options.

## Panel Libraries

The names of the panel libraries vary from site to site and for the different releases of ISPF. These panel libraries are allocated to the ISPLIB DD statement under TSO.

Be aware that some installations do not allow direct modifications of IBM panels and libraries. In this case, you can place the modified panels in user or site-specific libraries and concatenate them ahead of the IBM libraries.

Ask your system administrator for the specific ISPF panel library that applies to your site and contains the panel ISR@PRIM.

**Note:** The selection menus shown in the following examples are part of the program product ISPF and are copyrighted by IBM.

## Example 1

This example shows you how to add selection code R to the primary option menu ISR@PRIM for ISPF.

The offset lines are the inserted lines.

```
%----- ISPF/PDF PRIMARY OPTION MENU -----
%OPTION ==>_ZCMD
%
%                                +USERID  - &ZUSER
% 0 +ISPF PARS - SPECIFY TERMINAL AND USER PARAMETERS +TIME -
% 1 +BROWSE   - DISPLAY SOURCE DATA OR OUTPUT LISTINGS +TERMINAL -
% 2 +EDIT     - CREATE OR CHANGE SOURCE DATA          +PF KEYS - &ZKEYS
% 3 +UTILITIES - PERFORM UTILITY FUNCTIONS
% 4 +FOREGROUND - INVOKE LANGUAGE PROCESSORS IN FOREGROUND
% 5 +BATCH    - SUBMIT JOB FOR LANGUAGE PROCESSING
% 6 +COMMAND  - ENTER TSO COMMAND, CLIST, OR REXX EXEC
% 7 +DIALOG TEST - PERFORM DIALOG TESTING
% 8 +LM UTILITIES - PERFORM LIBRARY ADMINISTRATOR UTILITY FUNCTIONS
% C +CHANGES  - DISPLAY SUMMARY OF CHANGES FOR THIS RELEASE
% R +RMOSPF    - DELIVER ADMINISTRATION
% T +TUTORIAL  - DISPLAY INFORMATION ABOUT ISPF/PDF
% X +EXIT      - TERMINATE ISPF USING LOG AND LIST DEFAULTS

%
+ENTER%END+COMMAND TO TERMINATE ISPF.
)INIT
  .HELP = ISR00003
  &ZPRIM = YES          /* ALWAYS A PRIMARY OPTION MENU      */
  &ZHTOP = ISR00003     /* TUTORIAL TABLE OF CONTENTS        */
  &ZHINDEX = ISR91000  /* TUTORIAL INDEX - 1ST PAGE          */
)PROC
  &ZSEL = TRANS( TRUNC (&ZCMD, '.')
    0, 'PANEL(ISPOPTA)'
    1, 'PGM(ISRBRO) PARM(ISRBRO01)'
    2, 'PGM(ISREDIT) PARM(P,ISREDM01)'
    3, 'PANEL(ISRUTIL)'
    4, 'PANEL(ISRFPA)'
    5, 'PGM(ISRJB1) PARM(ISRJPA) NOCHECK'
    6, 'PGM(ISRPTC)'
    7, 'PGM(ISPYXDR) PARM(ISR) NOCHECK'
    8, 'PANEL(ISRLPRIM)'
    C, 'PGM(ISPTUTOR) PARM(ISR00005)'
    R, 'PGM(RMOSPF) PARM(RMO.SYSTEM1) NEWAPPL(RMO)'
    T, 'PGM(ISPTUTOR) PARM(ISR00000)'
    ' ', ' '
    X, 'EXIT'
    *, '?' )

  &ZTRAIL = .TRAIL
)END
```

**Note:**

- NEWAPPL(RMO) is required and must be specified as shown previously in this section.

This parameter is used with the command table library concatenation from Step 3 of the ISPF Installation Instructions.

- NEWAPPL(RMO) allows CA Deliver to correctly interpret commands and program function key invocation.

If this parameter is not specified, certain PF keys such as the scroll keys may not function.



## Example 2

This example shows you how to add selection code R to the primary option menu ISP@PRIM for SPF. Shading identifies the inserted lines.

```
%----- SPF-MVS PRIMARY OPTION MENU -----
%OPTION ==>_OPT
%
%                                +USERID -
% 0 +ISPF PARMs - SPECIFY TERMINAL AND USER PARAMETERS +TIME -
% 1 +BROWSE - DISPLAY SOURCE DATA OR OUTPUT LISTINGS +TERMINAL -
% 2 +EDIT - CREATE OR CHANGE SOURCE DATA +PF KEYS -
% 3 +UTILITIES - PERFORM SPF UTILITY FUNCTIONS
% 4 +FOREGROUND - COMPILE, ASSEMBLE, OR DEBUG
% 5 +BACKGROUND - COMPILE, ASSEMBLE, OR LINK EDIT
% 6 +COMMAND - ENTER TSO COMMAND OR CLIST
% 7 +SUPPORT - TEST DIALOG OR CONVERT MENU/MESSAGE FORMATS
% 8 +LM UTILITIES- PERFORM LIBRARY ADMINISTRATOR UTILITY FUNCTIONS
% R +RMOSPF - DELIVER ADMINISTRATION
% T +TUTORIAL - DISPLAY INFORMATION ABOUT SPF
% X +EXIT - TERMINATE SPF USING LIST/LOG DEFAULTS
%
+PRESS%END KEY TO TERMINATE SPF+
%
)INIT
.HELP = TTUTOR
&ZHTOP = TTUTOR /* TUTORIAL TABLE OF CONTENTS */
&ZHINDEX = TINDEX /* TUTORIAL INDEX - 1ST PAGE */
)PROC
&ZSEL = TRANS( TRUNC (&OPT, '.')
0, 'PANEL(ISPOPT)'
1, 'PGM(ISRBRO)'
2, 'PGM(ISPEDIT)'
3, 'PANEL(ISPUTIL)'
4, 'PANEL(ISPFORA)'
5, 'PANEL(ISRJOB)'
6, 'PGM(ISPTS0)'
7, 'PANEL(ISPOTAC)'
R, 'PGM(EC0XMSPF) PARM(RM0.SYSTEM1)'
T, 'PGM(ISPTUTOR) PARM(T)'
' ', ' '
X, 'EXIT'
*, '?' )
)END
```

### Example 3

This example shows you how to add selection code 3.R as a sub-option to the utilities menu ISPUTIL for ISPF.

The offset lines are the inserted lines.

```
%----- UTILITY SELECTION MENU -----
%OPTION ==> _OPT      +
%
% 1 +LIBRARY      - LIBRARY UTILITY:
+                  PRINT INDEX LISTING OR ENTIRE DATASET
+                  PRINT, RENAME, DELETE, OR BROWSE MEMBERS
+                  COMPRESS DATASET
% 2 +DATASET      - DATASET UTILITY:
+                  DISPLAY DATASET INFORMATION
+                  ALLOCATE, RENAME, OR DELETE ENTIRE DATASET
+                  CATALOG OR UNCATALOG DATASET
% 3 +MOVE/COPY    - MOVE OR COPY MEMBERS OR DATASETS
% 4 +CATALOG      - CATALOG MANAGEMENT:
+                  DISPLAY OR PRINT CATALOG ENTRIES
+                  INITIALIZE OR DELETE USER CATALOG ALIAS
% 5 +RESET        - RESET STATISTICS FOR MEMBERS OF ISPF LIBRARY
% 6 +HARDCOPY     - INITIATE HARDCOPY OUTPUT
% 7 +VTOC         - DISPLAY OR PRINT VTOC ENTRIES FOR A DASD VOLUME
% 8 +OUTLIST      - DISPLAY, DELETE, OR PRINT HELD JOB OUTPUT
% 9 +SCRIPT/VS    - FORMAT, DISPLAY, AND OPTIONALLY PRINT SCRIPT TEXT
% R +RMOSPF       - DELIVER ADMINISTRATION

)INIT
  .HELP = TU
)PROC
  &SEL = TRANS( TRUNC (&OPT, '.')
               1, 'PGM(ISPUDA) PARM(UDA1)'
               2, 'PGM(ISPUDA) PARM(UDA1)'
               3, 'PGM(ISPUMC)'
               4, 'PGM(ISPUCA)'
               5, 'PGM(ISPURS)'
               6, 'PGM(ISPUHC)'
               7, 'PGM(ISPUVT)'
               8, 'PGM(ISPUOL) PARM(UOL01)'
               9, 'PGM(ISPUSC) PARM(SCRPTA)'
               R, 'PGM(RMOSPF) PARM(RM0.SYSTEM1) NEWAPPL(RM0)'
               ' ', ' '
               *, '?' )
)END
```

## Install the TSO Online Retrieval Option

The following step is required to install the TSO online retrieval option and is explained in detail in the next topic.

(Optional) Add STEPLIB DD statements to the TSO LOGON procedures if the load modules are not in a linklist library.

### Step 1: (Optional) Add STEPLIB DD Statements

The action you take in this step depends on what you did during the base-product installation—specifically, did you:

- Authorize the program load library or
- Copy the modules to a system authorized library

If the load modules were *not* copied to one of the libraries in the linklist:

- Add a STEPLIB DD statement (for the library containing the load modules) to the TSO LOGON procedures for those TSO users who are to use the native TSO online retrieval option.

If the load modules were copied to one of the libraries in the linklist, no STEPLIB DD statements are required.

**Note:** If you have CA View, the CA View load modules either must also be in the linklist, or placed in a STEPLIB statement with this step.

## Install the CA Roscoe Online Retrieval Option

The CA Roscoe online retrieval option runs as a command processor under ETSO/Roscoe.

The following steps are required to install the CA Roscoe/Cross-Memory Online Retrieval Option. Each step is explained in detail in the sections that follow.

1. (Optional) Concatenate the Load Module Library to the ETSOLIB DD statement, if the load modules were not copied to a linklist library.
2. Add the control statement for the RMOROS command processor to the Eligible Program List (EPL).
3. Invoke the RMOROS command processor.

## Step 1: (Optional) Concatenate the Load Module Library

If the load modules were *not* copied to a linklist library, concatenate the library that contains the load modules to the ETSOLIB DD statement in the CA Roscoe startup JCL.

**Note:** If you have CA View, the CA View load modules must also be either in the linklist or in an ETSOLIB statement with this step.

## Step 2: Add RMOROS Command Process

Add this Eligible Program List control statement to member ETSOPGMS for the CA Roscoe user with the RO prefix:

Column	Contents
1–8	RMOROS
9	Blank
10–12	Number of users allowed to access CA Deliver at one time
13	Blank
14–17	CPU time slice; use 9999 to prevent premature termination
18	Blank
19–24	Maximum memory (in KB) below the 16 MB line This value can vary depending on size of database and other factors (0001000 should be adequate).
25	Blank
26–31	Maximum memory (in KB) below the line that CA Deliver can acquire at one time Use 999999 so that GETMAINS are not limited.
32	Blank
33–38	Maximum memory (in KB) above the 16 MB line This value can vary depending on the features used (000512 should be adequate).
39	Blank
40–45	Maximum memory (in KB) above the line that CA Deliver can acquire at one time Use 999999 so that GETMAINS are not limited.
46	Blank
47–48	CP to call RMOROS as a TSO command processor

Column	Contents
49	Y – Application authorized to issue MODESET SVC
50	Blank
51-52	CP to call ECOXMROS as a TSO command processor
53-255	Ignored

## Install Cross-Memory Services

The cross-memory services interface is required for these online interfaces:

- CICS pseudo-conversational
- IMS
- VTAM
- ISPF/cross-memory
- TSO/cross-memory
- CA Roscoe/cross-memory

This list summarizes the steps to install the cross-memory services. Detailed instructions are in the sections that follow.

1. (Optional) Add the Start Procedure to the PROCLIB for the Cross-Memory Online Task.
2. (Optional) Modify, Assemble, and Link the ECOXMCTR Module.
3. Define Security Requirements.

## Cross-Memory Services Regions

The VTAM and XMS (cross-memory services) interfaces operate in one or more cross-memory online regions.

A cross-memory region can be configured as:

- An XMS only region
- A VTAM only region
- A combination of XMS and VTAM users

Be aware of the following:

- Each cross-memory region is configured with the start-up parameters provided on the PARM= of the execute statement, and with an optional SYSIN DD statement.  
The REGION= specification determines the maximum number of users supported.
- Allow 20 MB (megabytes) for the XMS region plus 1 MB of storage for every two users.

For example, if you specified a REGION of 120 MB, you could specify:

```
USERMAX=200
```

If more users are needed, multiple regions can be started under the same SUBSYS= value and will be chained together.

**Note:** The REGION ID specified in the parameters must be different for each region, and if VTAM interface is used, a different RMOAPPL= name will be needed for each region.

## Interface Parameter Requirements

This table lists the optional and required parameters for each interface.

**Note:** The numbers next to the interface values refer to note references.

Parameter	VTAM	TSO	TSO/ISPF	CA Roscoe	CICS	IMS/DC
CANCEL	Opt. (1)	Opt. (1)	Opt. (1)	Opt. (1)	Opt. (1)	Opt. (1)
LGNFMT	Opt. (2)					
LGNSEC	Opt. (3)	Opt. (3)	Opt. (3)	Opt. (3)	Opt. (3)	Opt. (3)
LGNPROP	Opt. (3)	Opt. (3)	Opt. (3)	Opt. (3)	Opt. (3)	Opt. (3)
LONGWAIT	Opt. (1)	Opt. (1)	Opt. (1)	Opt. (1)	Opt. (1)	Opt. (1)
MSGVLV	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
RMOAPPL	Req.					
RMOVTDDB	Opt. (4)					
SMFSESS	Opt. (5)	Opt. (5)	Opt. (5)	Opt. (5)	Opt. (5)	Opt. (5)
SUBSYS	Opt. (6)	Opt. (6)	Opt. (6)	Opt. (6)	Opt. (6)	Opt. (6)
USERMAX	Req.	Req.	Req.	Req.	Req.	Req.
VTAMPASS	Opt. (7)					
VTAMSAA	Opt. (8)					
VTMQUERY	Opt. (9)					

Parameter	VTAM	TSO	TSO/ISPF	CA Roscoe	CICS	IMS/DC
XMS	Opt. (10)	Opt. (10)	Opt. (10)	Opt. (10)	Opt. (10)	Opt. (10)
XMSSUB		Req. (11)	Req. (11)	Req. (11)		Req. (11)

### Notes for the Interface Parameter Requirements Table

1. The CANCEL= and LONGWAIT= values work together.  
We recommend that you set CANCEL=YES and set LONGWAIT to a value appropriate for your site.
2. LGNFMT= should either not be specified, or it is to be specified as the default (LGNFMT=1), unless your session manager cannot provide logon data in the normal format.  
  
If RMOVTDB= is specified, LGNFMT=1 must be specified; any VTAM logon data will be ignored.
3. The LGNSEC= and LGNPROP= work together, and require the default RMOUSxUX exit.  
  
If LGNSEC=YES or LGNSEC=YESP is used (to indicate external security signon), the LGNPROP=YES/NO will be used to control whether security violations, database opens and jobs submitted will use the user ID (LGNPROP=YES which is the default) or will use the XMS region's user ID.  
  
It works as follows:
  - In the online region, the CA Deliver database is opened before logon, and uses the XMS region's user ID.
4. The RMOVTDB= only affects VTAM access, and is only to be used when the session manager cannot produce valid LOGON DATA.  
  
For the valid formats supported by CA Deliver, see the LGNFMT= parameter.
5. The SMFSESS= is to be specified when the user needs to collect user session statistics (CPU, logon/LOGOFF times, storage used, and so on).
6. The SUBSYS= is only to be specified when you are using a non-default subsystem ID under MVS.  
  
The default is release specific; it does not require JCL/PARM changes when you are converting to a new software release.
7. VTAMPASS= is only to be specified if you are going to be running a multi-region VTAM interface.  
  
The other VTAM regions must specify the same parameters (LGNFMT= RMOVDTB=, VTMQUERY=, VTAMSAA=), or the interface might react in unpredictable ways.

8. VTMQUERY= is to be specified either as NORM (normal) or allowed to default to that value.

VTMQUERY=NONE works, but CA Deliver cannot detect color/high-light terminal attributes so color/high-light support will be shut off.

VTAMSAA=NO is to be used if terminals cannot support the SNA QUERY LIST command, such as the older 3270/3290 devices and some older PC/3270 emulators.

9. XMS=NO is to be used when you are going to be using only the VTAM interface.
10. XMS=YES (the default) must be used to provide support for these interfaces.
11. XMSSUB=YES must be specified to provide support for these interfaces.

The XMSSUB=YES must reside in an XMS region with a default SUBSYS= value. If multiple XMS regions are started, only one region can have XMSSUB=YES. The other regions will still be available for user sessions, but their traffic will be routed through the region specifying XMSSUB=YES.

If you terminate the region with XMSSUB=YES, all sessions using the subtask are going to fail (that is, all TSO/XMS, ISPF/XMS, CA Roscoe/XMS, IMS/DC regions). CICS has router SUBTASK in its region, and does not use the XMSSUB=YES function.

12. The OVERRIDE parameter is valid for all interfaces and is optional. It might be specified only in the execute statement PARM field and it cannot be coded in the SYSIN data set.

If the parameter is not coded, the default duplicate parameter substitution hierarchy is SYSIN then the EXEC PARM.

- The OVERRIDE parameter determines whether parameters in the execute statement PARM field have precedence over parameters in the SYSIN data set.
- If OVERRIDE is coded in the execute statement PARM field, parameters specified in the execute statement PARM field will override duplicate specifications in the SYSIN data set.
- If OVERRIDE is not coded, parameters specified in the SYSIN data set are used and corresponding parameter specifications in the execute statement PARM field are ignored.
- The OVERRIDE parameter does not have any sub-parameters and it is coded as is in the execute statement PARM field.
- If this parameter is coded in the SYSIN data set, error message "EBCDRV99 OVERRIDE KEYWORD NOT ALLOWED IN SYSIN STATEMENTS - RUN ENDED U0016" is going to be displayed in the XMS job log and XMS will terminate with a return code of 16.



## Step 1: Add the Start Procedure for the Cross-Memory Online Task

Add this start-procedure JCL for the cross-memory online retrieval task as member CBROSDRV to SYS1.PROCLIB. Sample JCL for this PROC is provided in member CBROSDRV of CAI.CVDEPROC.

```
//CBROSDRV EXEC PGM=ECODRV,REGION=1024K,TIME=1440,
//          PARM=( 'XMSSYS01,RMOAPPL=RMOVTAM,USERMAX=30,VTAMPASS=YES' )
//*
//STEPLIB DD DSN=&CAI.CVDELOAD,DISP=SHR
//*
//SYSPRINT DD SYSOUT=A --MESSAGE LOG (NEW, OUTPUT REQUIRED WHEN SUBMITTING
//*                      DUMP TO CA TECH SUPPORT)
//*
//*
//RMOLOG DD SYSOUT=A --MESSAGE LOG (NEW, OUTPUT REQUIRED WHEN
//*                      SUBMITTING DUMP TO CA TECH
//*                      SUPPORT) ONLY USED WHEN XMSSUB=YES)
//*
//*
//EBCUDUMP DD SYSOUT=A --INTERNAL DUMP OUTPUT (NEW, OUTPUT REQUIRED WHEN
//*                      SUBMITTING DUMP TO CA TECH SUPPORT)
//*
//*
//SYSUDUMP DD SYSOUT=A --MVS DUMP OUTPUT (OPTIONAL, MVS DUMP CAN BE ROUTED
//*                      WITH SYSMDUMP OR SYSABEND ALSO)
//*                      WARNING!!!! ABENDAID DUMPS ARE OF NO USE CORRECTING
//*                      PROBLEMS WITH RMOXMS. YOU MUST ALWAYS SUPPRESS
//*                      ABENDAID IF YOU HAVE IT INSTALLED FOR THIS REGION.
//*
//SYSIN DD DSN=CAI.CVDEOPTN (PARMXMS),DISP=SHR
```

## SYSIN Statements for Parameters

The REGIONID parameter is positional and must be specified in the PARM= statement of the cross-memory task JCL.

You can use SYSIN DD statements to specify the other cross-memory parameters.

If you are going to run multiple regions, specify these parameters in the PARM= statement:

```
SUBSYS=
RMOAPPL=
XMS=
```

You can specify the rest of the parameters with SYSIN DD statements. If you place the SYSIN statements in a PDS member, you can alter the parameters without shutting down the cross-memory region. Be aware that the parameters do not take effect until the next time the region is shut down and restarted.

**Note:**

- SYSIN parameters for cross-memory services must start in column #1. Any parameter that does not begin in column #1 is treated as a comment and is ignored.
- The OVERRIDE parameter cannot be coded in the SYSIN data set.
  - If the OVERRIDE parameter is coded in the execute statement PARM field, a duplicate parameter in the PARM field and the SYSIN data set will be set to the value specified in the PARM field parameter.
  - If the OVERRIDE parameter is not coded in the execute statement PARM field, a duplicate parameter in the PARM field and the SYSIN dataset will be set to the value specified in the SYSIN dataset parameter.

## Start Procedure Parameters

XMSSYS01 (in the PARM statement) specifies the one- to eight-character REGIONID. The REGIONID is positional—it must be the first value of the PARM= statement.

This value is used to define separate cross-memory regions attached to one MVS subsystem (specified by the SUBSYS parameter).

**Note:** Each separate RMOXMS region has its own REGIONID. We suggest using the PROC name of the cross-memory-started task.

**CANCEL=YES|NO**

Indicates one of the following:

- CANCEL=YES specifies that a user who is inactive (no commands entered) for the time specified by the LONGWAIT parameter will be canceled, and the session will be terminated. With CANCEL=YES, all users will be automatically canceled if the region is shut down by an operator command.
- CANCEL=NO specifies that the connection is not canceled, and the user status changes to LONGWAIT.

**Default:** NO

**LGNFMT=n**

Specifies the format of the data parameter when logging on to a VTAM region where n is a digit (1 through 3), as follows:

- 1 database//userid/password/newpass
- 2 userID/password/newpass/database/mode
- 3 database/mode

**Default:** 1

**LGNPROP=YES|NO**

Indicates whether the CA Deliver user ID should be passed to MVS for propagation during submit processing.

This parameter is only valid if LGNSEC=YES is specified.

**Default:** YES

**LGNSEC=YES|NO|PASSWORD|YESP**

Indicates whether there is to be RACROUTE security checking.

LGNSEC must be YES or YESP if you are accessing a database that has the CA Deliver initialization parameter SECURITY=EXTERNAL specified.

Modifications to default logon exit (RMOUSXUX) is not required to implement external security. This exit is only provided so that you can customize the exit to provide any necessary functionality.

For example, to access external security packages directly, without SAF, you must modify and install the RMOUSXUX user exit.

These values for LGNSEC are effective when the default exits are implemented:

**Value**

Result

**YES**

External security checking is performed using SAF calls.

External security verifies userid only for all cross-memory interfaces (with no interruption to the user).

A panel is presented to the user to verify userid and password.

**Note:** This panel is only presented when the user interface does not automatically send the userid to the XMS region.

Because the password is not forwarded, RACF or CA ACF2R Security (eTrust CA-ACF2) requires additional specifications. For RACF or CA ACF2, see Bypassing Password Verification in the chapter "Security" in the Reference Guide for implementation instructions.

#### **NO**

No SAF call to external security is performed.

The user ID is checked internally against CA Deliver definitions.

If no match is found, CA Deliver might or might not dynamically create a user ID depending on the value of your DEFMODE initialization parameter.

Review your DEFMODE values to be sure that they are appropriate.

#### **PASSWORD**

No call to external security is performed.

Internally, user ID and password are verified.

#### **YESP**

External security checking is performed using SAF calls.

External security verifies userid and password for all cross-memory interfaces (with no interruption to the user).

A panel is presented to the user to verify the userid and password. This panel is only presented when the user interface does not automatically send the userid and password to the XMS region.

**Default:** NO

#### **LONGWAIT=nn**

Specifies the number of minutes of inactivity (no commands entered) before a user's session is terminated.

The CANCEL parameter must be YES to terminate the session.

**Default:** 15

#### **MSGLVL=CRIT|ACTN|NORM|INFO|TRCE**

Indicates the level of message to be written to the started task job log.

Unless they are suppressed, the CRITICAL and ACTION messages are written to the console. These settings cause these types of messages to be displayed:

**CRIT**

Displays critical messages.

**ACTN**

Displays critical and action messages.

**NORM**

Displays critical, action, and normal messages.

**Default:** NORM

**INFO**

Displays all but trace messages.

**TRCE**

Displays all messages.

**Note:** This parameter does not suppress messages from the SYSPRINT log.

**RMOAPPL=applname**

Specifies the RMOVTAM APPLID which provides VTAM user signon capability.

**Default:** RMOVTAM.

**RMOVTDB=high-level.databasesname**

Specifies that this database high-level qualifier must be used by all RMOVTAM interface users.

Typically, you would not specify this value and allow the user to specify which database to access when the user logs on. When this parameter is specified, any database specified at logon time with the VTAM logon command is ignored.

**SMFSESS=nnn**

Specifies whether SMF records are to be collected for the cross-memory sessions.

The EBCSMFU1 macro documents the records available.

**Default:** zero—no record collection.

**SUBSYS=name**

Specifies the four-character MVS subsystem.

This must match the value in the ECOXMCTR table.

**Default:** XMC0

**Note:** The SUBSYS parameter does not apply to VTAM or IMS interface users.

**USERMAX=nn**

The maximum number of sessions to be allowed.

**Default:** 10

### **VTAMPASS=YES|NO**

Indicates whether signon requests can be passed to other regions in this subsystem when this region cannot accept the request

Possible reasons for not being able to accept a signon request are that the USERMAX parameter has been exceeded, or a SUSPEND operator command has been issued.

If VTAMPASS=YES is specified, include PASS in the AUTH value on the APPL statement in the VTAM definition. If you want to run multiple regions, VTAMPASS must be YES.

**Default:** NO

### **VTMQUERY=ALL|NORM|NONE**

Indicates whether the VTAM interface will QUERY terminals with dynamic log modes to determine the alternate screen size.

Use this parameter only to query VTAM terminals that support SNA QUERY commands and do not have an alternate screen size defined in their logmode.

#### **ALL**

Queries all terminals.

#### **NORM**

Queries the terminal if the bind image indicates it is a VTAM QUERY terminal, and there is no alternate screen size defined.

#### **NONE**

Does not query any terminals (and color is not supported).

**Default:** NORM

### **VTAMSAA=YES|NO**

Indicates whether all terminals are SAA compliant.

If you have the following:

- Older terminals that cannot support SAA (3290 terminals, for example
- These older terminals are going to be connecting with log modes that indicate that CA View should query their alternate screen size

You must specify VTAMSAA=NO or these terminals are not able to log onto the SARVTAM interface.

VTAMSAA=NO causes more overhead in logging on terminals than can be queried, and is only to be used when required.

### **XMS=YES|NO**

Indicates whether cross-memory users are to be allowed to sign on to the region.

Set XMS=NO if this is a VTAM only region, and cross-memory is not to be supported.

**Note:** If XMS=NO, there should be a VTAM ACB name coded in the SARAPPL= parameter.

**Default:** YES

**XMSSUB=YES|NO**

XMSSUB=YES is required for ISPF cross-memory, TSO cross-memory, and CA Roscoe cross-memory sessions.

All other interface users should set XMSSUB=NO.

**Default:** NO

### **RMOLOG DD Statement (Optional)**

The optional RMOLOG DD statement is used to specify where to write the log of user subtask messages.

This output is critical to resolving user subtask ABENDs, and is to be submitted to CA Technical Support along with the region or task dump created with an ABEND.

### **SYSPRINT DD Statement (Optional)**

The optional SYSPRINT DD statement is used to specify where to write the log of cross-memory (RMOXMS) messages.

This output is critical to resolving RMOXMS ABENDs, and is to be submitted to CA Technical Support along with the region or task dump created with an ABEND.

### **EBCUDUMP DD Statement**

The EBCUDUMP DD statement is required, and is used to specify where to write a special dump of CA Deliver control blocks that do not appear in normal MVS dump output.

This output is critical to resolving RMOXMS ABENDs, and is to be submitted to CA Technical Support along with the region or task dump created with an ABEND.

**Notes:**

- On ABEND Output, only regular MVS dump output should be collected. Output from dump compression and analysis programs is not helpful to technical support—you might be required to recreate the dump.
- Acceptable types include SYSUDUMP, SYSMDUMP, or SYSABEND output, in print-record format. IPCS/SVC dumps and CICS transaction or region dumps are also acceptable, but must be formatted for printing before they are placed on the tape.
- The RMOXMS region uses the operator facility to abort a user's task for various problems. These problems might be a LONGWAIT time out, a VTAM I/O error, or a detected internal error, which appear in the log followed by a U0522 ABEND of the user subtask. No dump is generated.

## STEPLIB for This Job

The action you take in this step depends on what you did during the base-product installation. Specifically, did you:

- Authorize the program load library or
- Copy the modules to a system authorized library.

Be aware of the following before you run this job:

- If the CA Deliver load modules were copied to an authorized library other than one of the linklist libraries, you must change the data set name on the STEPLIB DD statement.
- If the load modules were copied to a linklist library, you must remove the STEPLIB DD statement.
- If you have CA View installed, you must consider these possibilities before you run the job listed previously above: If the CA Deliver load modules were copied to an authorized library other than one of the linklist libraries, concatenate the CA Deliver load library as a second STEPLIB after the CA View load library in the STEPLIB DD statement.
- If the load modules were copied to a linklist library, do nothing.

## Step 2: Modify, Assemble, and Link the ECOXMCTR Module

The ECOXMCTR module defines the relationship between a transaction identifier and the database, and session attributes. Also, the execution options for the cross-memory subtask system are also defined in this module. All interfaces except VTAM require the ECOXMCTR table.



Be aware of the following:

- You must assemble the ECOXMCTR table during installation to define the relationship between CA View and CA Deliver database qualifiers, and the session options to be used, and to provide information used to build the XMS database table.
- The table contains an EBCXMOPT macro to define initialization options and one EBCXMTRN, RMOXMTRN, or INBXMTRN macro for each TSO user session. For all users except VTAM, the transaction being used for each session must be defined in an EBCXMTRN statement. Only the database high-level qualifier is used for VTAM XMS users.
- The transaction definition macros are searched by database name, and the first match is used. If no entry is found in the ECOXMCTR table, the session is rejected.

A sample EBCXMCTR source program is in the CAI.CVDESRC library, which is unloaded as part of CA Deliver's installation. The source is comprised of one or more assembler macros.

## Format of the Macros

The first statement defines the system options and has this format:

```
EBCXMOPT DESTID=dest,SRVTRAN=transaction,MSGLVL=level,           X
          DESTID=CICS-dest,LOGWAIT=timeout-val,                 X
          USERMAX=user-number,WAITCNT=maxcount
```

The next group of statements is for each transaction, database, or both to be accessed; they have this format:

```
EBCXMTRN TRANID=tranid,INDEX=high-level-name,TIMEOUT=sec,      X
          SUBSYS=subsysid,RECON=yes|no,                          X
          MSGSUPP=yes|no
```

The last statement generates the transaction table:

```
EBCXMTRN TYPE=GEN
```

Finally, an assembler END statement is needed to end the table:

```
END
```

## EBCXMOPT Statement Parameters

The following parameters are specified in the EBCXMOPT statement:

### **DESTID=dest**

Specifies the transient data destination to which messages from the CICS subtask are sent.

- Supply a DESTID to indicate that a queue (typically an extra partitioned queue that points to a SYSOUT data definition name) is defined.
- Leave DESTID blank to specify that messages from the CICS subtask are not to be captured.

### **XMC11=transaction**

Specifies a four character transaction that is to be added to the EBCXMC11 timeout message.

This transaction allows for site-specific tailoring of the timeout message.

**Default:** None

### **SRVTRAN=transaction**

Specifies the transaction defined for ECOCISRV that is initiated as a service transaction when CA Deliver CICS is initialized.

**Default:** XMC0

### **MSGLVL=CRIT|ACTN|NORM|INFO|TRCE**

Indicates the level of messages to display on the console.

These settings cause the following types of messages to be written:

#### **CRIT**

Displays only critical messages.

#### **ACTN**

Displays only critical and action messages.

#### **NORM**

Displays only critical, action, and normal messages.

#### **INFO**

Displays all but trace messages.

#### **TRCE**

Displays all messages.

**Default:** NORM

**LOGWAIT=nnn**

Indicates the amount of time a user is to wait to log on before the user's session times out.

**Default:** 200 seconds (2 minutes, 00 seconds)

**SGNCNT=nn**

Controls the number of logon control blocks allocated. These blocks are only used during the logon process. They are then reused and made available to other users attempting to log on.

When you increase the SGNCNT value, be aware that 256 bytes of ECSA are needed each time SGNCNT is increased by 1. Typically, 5 logon blocks are enough, but the value cannot exceed 50.

**Default:** 5

**SUBMAX=nn**

Indicates the total number of user control blocks that are allocated when a cross-memory subtask (other than CICS) is initialized.

**Default:** 500

**USERMAX=nn**

Indicates the number of user control blocks that are allocated when CICS is initialized.

**Default:** 500

**WAITCNT=nnn**

The number of sessions for which the subtask can wait.

**Default:** 256

**IMSMENU**

The IMS/DC conversational menu to transfer to when CA Deliver terminates.

If this value is not specified, the transaction in the SPA is set to blanks.

**IMSSPA**

The size of the IMS/DC SPA.

The SPA size must be at least 18, but cannot exceed 100.

**Default:** 18

## EBCXMTRN Statement Parameters

The following parameters are specified in the EBCXMTRN statements:

### **TYPE=EXPRESS|GEN**

Specifies whether this is a transaction/database entry or the table is to be generated.

#### **GEN**

Generates the table.

#### **EXPRESS**

Contains a transaction code and index entry for CA Deliver. SAR and INB are valid for CA Viewr and CA Balancing Report Control (CA Balancing) if this is a combined table.

### **TRANID=tranid**

Defines the transaction identifier for CICS.

For TSO, ISPF, and CA Roscoe (the cross-memory drivers), TRANID is ignored, and the first instance of the database high-level qualifier is used.

### **INDEX=high-level-name**

Defines the high-level name of the database.

### **TIMEOUT=nnn**

Defines the time out value, in seconds, to be used by this transaction.

- This value is used as the maximum wait time for a response from the RMOXMS started task.
- This value must be greater than zero and less than 9999 seconds (which is two hours, 40 minutes).
- If you do not want any timeout to occur, specify TIMEOUT=NO.

**Default:** 240 seconds (four minutes)

### **SUBSYS=subsys-id**

Defines a four-character MVS subsystem name which must match the value specified for SUBSYS in the cross-memory started task JCL.

Each subsystem can support multiple databases and/or CICS/IMS regions.

**Default:** XMC0

#### **Note:**

- There is no need to change the default unless you wish to bring up multiple cross-memory regions and separate transactions for testing or performance reasons.
- This subsystem name is not defined in SYS1.PARMLIB.

**RECON=YES|NO**

Indicates whether a user can reconnect to a lost session.

**Default:** NO.

**MSGSUPP=YES|NO**

Indicates whether a termination message is displayed when a session is terminated by a user.

**Default:** NO. This does not suppress messages generated from abnormal termination.

**Note:** The statements follow standard assembler coding conventions.

## Macro Coding Example

Assume that two CA Deliver systems have been created.

The databases for the two systems have high-level names of RMO.SYSTEM1 and RMO.SYSTEM2. A user must enter transaction identifier RM1 for the first system and RM2 for the second.

The source for program ECOXMCTR contains these control statements:

```
EBCXMOPT  MSGVL=CRIT,USERMAX=50
EBCXMTRN  TRANID=RM1,INDEX=RMO.SYSTEM1
EBCXMTRN  TRANID=RM2,INDEX=RMO.SYSTEM2
EBCXMTRN  TYPE=GEN
END
```

EBCXMTRN TYPE=GEN must be the last statement before the END. This statement causes the EBCXMCTR CSECT to be generated.

## Sample JCL

Sample JCL for this job is provided in member BROXCTR of CAI.CVDEJCL.

This job provides an SMP/E USERMOD which assembles and links an installation-dependent version of ECOXMCTR.

## Parameters for Online Interfaces

The ECOXMCTR table defines the way linkages between the online drivers and the XMS region are established. Some of the parameters are used only in specific environments and others are used in all environments.

This table indicates which parameter affects each online interface.

All XMS interfaces require the ECOXMCTR table.

You must:

- Assemble the table during installation to define the relationship between CA View and CA Deliver database high-level qualifiers and the session options that are to be used
- Provide the information that is used to build the XMS database table.

**Note:** Be aware if both CA View and CA Deliver are installed and the CA View interface is doing any access to an associated DLVR database, the associated DLVR database needs to be added as an entry in the ECOXMCTR table

Only the database high-level qualifier is used for VTAM XMS users.

The numbers in parentheses are explained in the notes section that follows the table.

Parameter	TSO	TSO/ISPF	CA Roscoe	CICS	IMS/DC
DESTID				Opt. (1)	
XMC11				Opt. (8)	
SRVTRAN				Opt. (2)	
MSGLVL	Opt.	Opt.	Opt.	Opt.	Opt.
LOGWAIT	Opt.	Opt.	Opt.	Opt.	Opt.
SUBMAX	Opt. (3)	Opt. (3)	Opt. (3)		Opt. (3)
USERMAX				Opt. (4)	
WAITCNT	Opt. (5)	Opt. (5)	Opt. (5)	Opt. (5)	Opt. (5)
IMSMENU					Opt. (6)
IMSSPA					Opt. (7)

**Note:** The numbers next to the table values refer to note references.

## Notes for the Online Interface Parameters

### Follow these steps:

1. DESTID= specifies an optional CICS destination to which message output is to be written.
2. SRVTRAN= specifies the service transaction ID.  
  
This transaction is required for CICS, but you can use the default service transaction name XMC0.
3. SUBMAX= controls the maximum connections that can be managed by the subtask program.  
  
The default is 500, which should be changed for most users. Each ISPF/XMS, TSO/XMS, CA Roscoe/XMS, or IMS/DC user connects through the XMS subtask and the value defines the total number of users that can be connected from these interfaces at one time.
4. USERMAX= controls the maximum connections that can be managed by the subtask program.  
  
The default is 500. Each CICS region can manage this number of sessions. To increase the value, you must restart the CICS or XMS region that owns the subtask.
5. WAITCNT= specifies a value that should remain at the default value at this time.  
  
Major performance problems occur if you set this to a lower value. Note that this value cannot be set above 255.
6. IMSMENU= specifies the IMS/DC conversational menu to transfer to when CA Deliver ends. If this value is not specified, the SPA TRAN is set to blank upon termination.
7. IMSSPA= specifies the length of the IMS/DC spa to be used (IMS/DC only).  
  
This parameter allows the spa size to be adjusted so that CA Deliver can transfer to user transactions.  
  
IMS/DC requires the spa size to remain the same. The spa size must be at least 18 bytes, and although you can specify a spa size of up to 100 bytes, only the first 18 bytes are used.
8. XMC11= specifies an optional 4-character CICS transaction ID that is displayed as part of message EBCXMC11 when a CICS user times out.

## Step 3: Define Security Requirements

### Follow these steps to define security requirements for CA Top Secret Security (eTrust CA Top Secret):

1. Rename the existing facility in the facility matrix table if you do not have a facility defined for RMOXMS:  
  
user1=NAME=RMOXMS

Be sure that the correct PGMname is defined for the new facility, where PGMname is either the first three characters or all the eight characters of the program name that is to make security calls (ECO or ECODRV).

2. Create region ACID for the facility:

```
TSS CRE(rmxms) pass(nopw,0) type(user) dept(dept)
mastfac(rmxms) NODSNCHK NORESCHK NOVOLCHK NOLCFCHK NOSUBCHK
```

3. Define the RMOXMS STC to the TSS STC record:

```
TSS ADDTO(STC) PROCNAME(rmxms) ACID(rmxms)
```

4. Give access to the ACIDs required to sign on to this facility:

```
TSS ADD(ACID) FAC(rmxms)
```

## Install the ISPF/Cross-Memory Online Retrieval Option

The ISPF/Cross-Memory Online Retrieval Option runs under IBM's ISPF for z/OS Version 3.0 and higher.

**Important!** This interface requires Cross-memory services to be already installed. For more information, see [Install Cross-Memory Services](#) in this chapter.

**Note:** In the JCL for the cross-memory services task, the parameter XMSSUB must be set to YES.

### Installation Steps

The following steps are required to install the ISPF/cross-memory online retrieval option. Each step is explained in detail later in the sections that follow.

1. (Optional) Add STEPLIB DD Statements to the TSO LOGON procedures if the load modules were not copied to a linklist library.
2. Add the panel and command table libraries to the TSO logon procedures. (For ISPF only, not for SPF.)
3. (Optional) Modify an ISPF selection menu to select the online retrieval feature.

### Step 1: (Optional) Add STEPLIB DD Statements to the TSO LOGON Procedures

The action you take in this step depends on what you did during the base-product installation—specifically, did you:

- Authorize the program load library, or
- Copy the modules to a system authorized library.



If the CA Deliver load modules were *not* copied to one of the libraries in the linklist, proceed with this step; otherwise go to the next step.

For this interface, the libraries do not have to be APF authorized. Authorization is provided in the cross-memory installation. Multiple versions of this online interface can coexist in one TSO library concatenation.

Do *one* of the following:

- Add a STEPLIB DD statement for the library that contains the load modules to the LOGON procedures for those TSO users who are going to use the ISPF/cross-memory online retrieval option.
- Provide the load library using the ISPF LIBDEF facility.

**Note:** If multiple versions of CA Deliver are going to be running simultaneously, or you want to also run a previous version of RMOSPF or RMOTSO, concatenate the load library you want RMOSPF or RMOTSO to use first.

**More information:**

[Step 6: Modify the Skeleton JCL](#) (see page 96)

## Step 2: Add Panel and Command Table Libraries to TSO LOGON

If you are going to run CA Deliver under ISPF, proceed with this step. For Version 3 or higher, both the command table library and the panel library are used.

To add panel and command table libraries to the TSO LOGON procedure:

1. Concatenate the command table library CAI.CVDETBLO to DD statement ISPTLIB.
2. Concatenate the panel library CAI.CVDEPNLO to DD statement ISPLLIB.

**Note:** If you also plan to use RMOSPF (the ISPF interface), and multiple versions of CA Deliver, concatenate CAI.CVDETBLO first. Use the CAI.CVDETBLO from the most current release.

## Step 3: (Optional) Modify an ISPF Selection Menu to Select Online Retrieval

If you want to add a selection code to one of the ISPF selection menus for the online retrieval feature, proceed with this step; otherwise, your ISPF detailed instructions are complete.

**Note:** If you add a selection code, you are able to select the online retrieval feature in the same way you select other ISPF options.

Use the value next to the NAME parameter on your Initialization Parameter Worksheet for PARM (high-level database name).

Use the values in this table for either SPF or ISPF.

Type	Selection Code is Defined As
ISPF (all versions)	'PGM(ECOXMSPF) PARM(high-level-database-name) NEWAPPL(RMO)'
SPF	'PGM(ECOXMSPF) PARM(high-level-database-name)'

## Panel Libraries

The names of the panel libraries vary from site to site and for the different releases of ISPF. These panel libraries are allocated to the ISPLIB DD statement under TSO.

Be aware that some installations do not allow direct modifications of IBM panels and libraries. In this case, you can place the modified panels in user or site-specific libraries and concatenate them ahead of the IBM libraries.

Ask your system administrator for the specific ISPF panel library that applies to your site and contains the panel ISR@PRIM.

**Note:** The selection menus shown in these examples are part of the program product ISPF and are copyrighted by IBM.

## Example 1

This example shows you how to add selection code R to the primary option menu ISR@PRIM for ISPF. The bright, offset text identifies the inserted lines.

```
----- ISPF/PDF PRIMARY OPTION MENU -----
%OPTION ==>_ZCMD
%
%                                +USERID  - &ZUSER
% 0 +ISPF PARS  - SPECIFY TERMINAL AND USER PARAMETERS +TIME    - &ZTIME
% 1 +BROWSE    - DISPLAY SOURCE DATA OR OUTPUT LISTINGS +TERMINAL - &ZTERM
% 2 +EDIT      - CREATE OR CHANGE SOURCE DATA          +PF KEYS  - &ZKEYS
% 3 +UTILITIES - PERFORM UTILITY FUNCTIONS
% 4 +FOREGROUND - INVOKE LANGUAGE PROCESSORS IN FOREGROUND
% 5 +BATCH     - SUBMIT JOB FOR LANGUAGE PROCESSING
% 6 +COMMAND   - ENTER TSO COMMAND, CLIST, OR REXX EXEC
% 7 +DIALOG TEST - PERFORM DIALOG TESTING
% 8 +LM UTILITIES- PERFORM LIBRARY ADMINISTRATOR UTILITY FUNCTIONS
% C +CHANGES  - DISPLAY SUMMARY OF CHANGES FOR THIS RELEASE
% R +RMOSPF    - DELIVER ADMINISTRATION
% T +TUTORIAL  - DISPLAY INFORMATION ABOUT ISPF/PDF
% X +EXIT      - TERMINATE ISPF USING LOG AND LIST DEFAULTS
%
+ENTER%END+COMMAND TO TERMINATE ISPF.
)INIT
  .HELP = ISR00003
  &ZPRIM = YES          /* ALWAYS A PRIMARY OPTION MENU */
  &ZHTOP = ISR00003     /* TUTORIAL TABLE OF CONTENTS */
  &ZINDEX = ISR91000 /* TUTORIAL INDEX - 1ST PAGE */
)PROC
  &ZSEL = TRANS( TRUNC (&ZCMD, '.'))
              0, 'PANEL(ISPOPTA)'
              1, 'PGM(ISRBRO) PARM(ISRBR001)'
              2, 'PGM(ISREDIT) PARM(P,ISREDM01)'
              3, 'PANEL(ISRUTIL)'
              4, 'PANEL(ISRFPA)'
              5, 'PGM(ISRJB1) PARM(ISRJPA) NOCHECK'
              6, 'PGM(ISRPTC)'
              7, 'PGM(ISPYXDR) PARM(ISR) NOCHECK'
              8, 'PANEL(ISRLPRIM)'
              C, 'PGM(ISPTUTOR) PARM(ISR00005)'
              R, 'PGM(EC0XMSPF) PARM(RM0.SYSTEM1) NEWAPPL(RM0)'
              T, 'PGM(ISPTUTOR) PARM(ISR00000)'
              ' ', ' '
              X, 'EXIT'
              *, '?' )
  &ZTRAIL = .TRAIL
)END
```

**Note:**

- NEWAPPL(RMO) is required and must be specified as shown previously in this section.

This parameter is used with the command table library concatenation from Step 3 of the ISPF Installation Instructions.

- NEWAPPL(RMO) allows CA Deliver to correctly interpret commands and program function key invocation.

If this parameter is not specified, certain PF keys such as the scroll keys may not function.

## Example 2

This example shows you how to add selection code R to the primary option menu ISP@PRIM for SPF. Shading identifies the inserted lines.

```
%----- SPF-MVS PRIMARY OPTION MENU -----
%OPTION ==>_OPT
%
%                                +USERID  -
%  0 +ISPF PARMs  -    SPECIFY TERMINAL AND USER PARAMETERS  +TIME      -
%  1 +BROWSE      -    DISPLAY SOURCE DATA OR OUTPUT LISTINGS +TERMINAL -
%  2 +EDIT        -    CREATE OR CHANGE SOURCE DATA          +PF KEYS  -
%  3 +UTILITIES   -    PERFORM SPF UTILITY FUNCTIONS
%  4 +FOREGROUND  -    COMPILE, ASSEMBLE, OR DEBUG
%  5 +BACKGROUND  -    COMPILE, ASSEMBLE, OR LINK EDIT
%  6 +COMMAND     -    ENTER TSO COMMAND OR CLIST
%  7 +SUPPORT     -    TEST DIALOG OR CONVERT MENU/MESSAGE FORMATS
%  8 +LM UTILITIES-    PERFORM LIBRARY ADMINISTRATOR UTILITY FUNCTIONS
%  R +RMOSPF      -    DELIVER ADMINISTRATION
%  T +TUTORIAL    -    DISPLAY INFORMATION ABOUT SPF
%  X +EXIT        -    TERMINATE SPF USING LIST/LOG DEFAULTS
%
+PRESS%END KEY TO TERMINATE SPF+
%
)INIT
  .HELP = TTUTOR
  &ZHTOP = TTUTOR /* TUTORIAL TABLE OF CONTENTS */
  &ZHINDEX = TINDEX /* TUTORIAL INDEX - 1ST PAGE */
)PROC
  &ZSEL = TRANS( TRUNC (&OPT, '.')
    0, 'PANEL(ISPOPT)'
    1, 'PGM(ISRBRO)'
    2, 'PGM(ISPEDIT)'
    3, 'PANEL(ISPUTIL)'
    4, 'PANEL(ISPFORA)'
    5, 'PANEL(ISRJOB)'
    6, 'PGM(ISPTS0)'
    7, 'PANEL(ISPOTAC)'
    R, 'PGM(EC0XMSPF) PARM(RM0.SYSTEM1)'
    T, 'PGM(ISPTUTOR) PARM(T)'
    ' ', ' '
    X, 'EXIT'
    *, '?' )
)END
```

## Example 3

This example shows you how to add selection code 3.R as a sub-option to the utilities menu ISPUTIL for ISPF.

The bright, offset text identifies the inserted lines.

```

%----- UTILITY SELECTION MENU -----
%OPTION ==>_OPT      +
%
% 1 +LIBRARY          LIBRARY UTILITY:
+                      PRINT INDEX LISTING OR ENTIRE DATASET
+                      PRINT, RENAME, DELETE, OR BROWSE MEMBERS
+                      COMPRESS DATASET
% 2 +DATASET          DATASET UTILITY:
+                      DISPLAY DATASET INFORMATION
+                      ALLOCATE, RENAME, OR DELETE ENTIRE DATASET
+                      CATALOG OR UNCATALOG DATASET
% 3 +MOVE/COPY        MOVE OR COPY MEMBERS OR DATASETS
% 4 +CATALOG           CATALOG MANAGEMENT:
+                      DISPLAY OR PRINT CATALOG ENTRIES
+                      INITIALIZE OR DELETE USER CATALOG ALIAS
% 5 +RESET            RESET STATISTICS FOR MEMBERS OF ISPF LIBRARY
% 6 +HARDCOPY          INITIATE HARDCOPY OUTPUT
% 7 +VTOC              DISPLAY OR PRINT VTOC ENTRIES FOR A DASD VOLUME
% 8 +OUTLIST           DISPLAY, DELETE, OR PRINT HELD JOB OUTPUT
% 9 +SCRIPT/VS         FORMAT, DISPLAY, AND OPTIONALLY PRINT SCRIPT TEXT
% R +RMOSPF            DELIVER ADMINISTRATION
)INIT
  .HELP = TU
)PROC
  &SEL = TRANS( TRUNC (&OPT, '.')
                1, 'PGM(ISPUDA) PARM(UDA1)'
                2, 'PGM(ISPUDA) PARM(UDA1)'
                3, 'PGM(ISPUMC)'
                4, 'PGM(ISPUCA)'
                5, 'PGM(ISPURS)'
                6, 'PGM(ISPUHC)'
                7, 'PGM(ISPUVT)'
                8, 'PGM(ISPUOL) PARM(UOL01)'
                9, 'PGM(ISPUSC) PARM(SCRPTA)'
                R, 'PGM(EC0XMSPF) PARM(RMO.SYSTEM1) NEWAPPL(RMO)'
                ' ', ' '
                *, '?' )
)END

```

## ISPF Cross-Memory Notes

Be aware of the following:

- The primary RMOXMS region must be started with the XMSSUB=YES parameter.
- The XMSSUB=YES parameter must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.

Only the primary XMS region can have XMSSUB=YES specified.

- The XMS regions must have the XMS=YES parameter to make it accessible.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA Deliver and CA View database high-level qualifiers. The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database as follows:

- SUBSYS= parameter of the cross-memory task must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- RECON=YES can be used to allow reconnection (after an ISPF terminal error) at the point of exit.
- TIMEOUT= specifies how long ISPF will wait for the XMS session to respond after the user enters input, in seconds.

We recommend as high a value as possible but not less than 240 (4 minutes).

To abort the XMS session and return the user to ISPF or the TSO command prompt, press the ATTN key.

**Note:** The SUBMAX= parameter controls the number of user connections, not the USERMAX= parameter. USERMAX= only applies when you are using the subtask with the CICS interface.

## Install the TSO/Cross-Memory Online Retrieval Option

**Important!** This interface requires cross-memory services to be installed. For more information, see the topic [Installing Cross-Memory Services](#) in this chapter.

**Note:** The parameter XMSSUB must be set to YES in the JCL for the cross-memory services task.

## Installation Steps

The following steps are required to install the TSO/Cross-Memory Online Retrieval Option. Each step is explained in detail in the sections that follow.

1. (Optional) Add STEPLIB DD Statements to the TSO LOGON procedures if the load modules were not copied to a linklist library.
2. (Optional) Set Up the TSOXMS Driver Program.

### Step 1: (Optional) Add STEPLIB DD Statements

The action you take in this step depends on what you did during the base-product installation—specifically, did you:

- Authorize the program load library or
- Copy the modules to a system authorized library

If the CA Deliver load modules were *not* copied to one of the libraries in the linklist, proceed with this step; otherwise go to the next step.

To add STEPLIB DD statements (for the library containing the CA Deliver load modules) to the TSO LOGON procedures, do the following:

- Add a STEPLIB DD statement for the library that contains the CA Deliver load modules to the LOGON procedures for those TSO users who are to use the ISPF/Cross-Memory Online Retrieval Option.

**Note:** For this interface, the libraries do not have to be APF authorized—authorization is provided in the cross-memory installation. Multiple releases of this online interface can coexist in one TSO library concatenation.

### Step 2: (Optional) Set up the TSOXMS Driver Program

To create user CLISTs to execute the CA Deliver TSOXMS driver program, issue:

```
EC0XMTSO highlevel.databasesname
```



## TSO Cross-Memory Notes

Be aware of the following:

- The primary RMOXMS region should be started with the XMSSUB=YES parameter.
- The XMSSUB=YES parameter must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.

Only the primary XMS region can have XMSSUB=YES specified.

- The XMS regions must have the XMS=YES parameter to make it accessible.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA View and CA Deliver database high-level qualifiers. The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database as follows:

- SUBSYS= parameter of the cross-memory task.  
This parameter must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- RECON=YES can be used to allow reconnection (after a TSO terminal error) at the point of exit.
- TIMEOUT= specifies how long TSO will wait for the XMS session to respond after the user enters input, in seconds.

We recommend as high a value as possible but not less than 240 (4 minutes).

To abort the XMS session and return the user to ISPF or the TSO command prompt, press the ATTN key.

**Note:** The SUBMAX= parameter controls the number of user connections, not the USERMAX= parameter. USERMAX=only applies when you are using the subtask with the CICS interface.

## Install the VTAM Online Retrieval Option

**Important!** This facility uses the cross-memory feature distributed with CA Deliver and must be installed with that feature. For more information about cross-memory feature, see the Install Cross-Memory Services section in this chapter.

## Installation Steps

The following steps are required to install the VTAM online retrieval option. Each step is explained in detail in the sections that follow.

1. Define the Application Program to VTAM.
2. (Optional) Create a USS Table Definition.

### Step 1: Define the Application Program to VTAM

Add this application program definition to SYS1.VTAMLST:

```
* SYS1.VTAMLST(rmomajor)  
rmomajor VBUILD TYPE=APPL  
rmovtam APPL ACBNAME=rmovtam,AUTH=(PASS,ACQ),EAS=nn
```

where:

#### **rmomajor**

Specifies the application program major node name.

Use the SYS1.VTAMLST member name. The member name must be unique and must not be the same as the names on the APPL statement.

#### **AUTH=(PASS,ACQ)**

Is required when the cross-memory parameter VTAMPASS=YES is used to support multiple cross-memory regions.

If VTAMPASS=NO, you can specify AUTH=(ACQ). For more information about the VTAMPASS parameter, see the Add the Start Procedure for the Cross-Memory Online Task step in this chapter.

#### **EAS=nn**

Specifies the approximate number of concurrent sessions.

#### **rmovtam**

Specifies the minor node name of the application program.

- This name must be unique within the network domain; it is the APPLID referenced in the USS definition table or LOGON command.
- This name is also specified on the cross-memory RMOAPPL parameter.
- If not specified, the network-unique name (the name of the APPL definition statement) is used.

### Step 2: (Optional) Create a USS Table Definition

To simplify the manner in which a user logs on to VTAM online retrieval, you can create a USS definition table for CA Deliver.

## Example

Assume that two CA Deliver systems have been created. The databases for the two systems have high-level names of RMO.SYSTEM1 and RMO.SYSTEM2, and you want a user to simply enter one of the commands to log on to VTAM online retrieval for the respective systems:

RM01  
RM02

Create a USS definition table as follows:

```
USSTAB
*
*   ENTRY FOR RM01
*
USSCMD  CMD=RM01,REP=LOGON,FORMAT=PL1
USSPARM PARM=APPLID,DEFAULT=RMOVTAM
USSPARM PARM=LOGMODE
USSPARM PARM=DATA,DEFAULT=RMO.SYSTEM1
*
*   ENTRY FOR RM02
*
USSCMD  CMD=RM02,REP=LOGON,FORMAT=PL1
USSPARM PARM=APPLID,DEFAULT=RMOVTAM
USSPARM PARM=LOGMODE
USSPARM PARM=DATA,DEFAULT=RMO.SYSTEM2
USSEND
```

## VTAM Cross-Memory Notes

Be aware of the following:

- For VTAM only regions, you can start the primary RMOXMS task with the XMSSUB=NO parameter. However if this is not a VTAM only region, we recommend that you start the primary RMOXMS region with the XMSSUB=YES parameter.
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.  
Only the primary XMS region can have XMSSUB=YES specified.
- VTAM only XMS regions can have the XMS=NO parameter to make it accessible.
- All XMS interfaces require the ECOXMCTR table. You must assemble the table during installation to:
  - Define the relationship between CA Deliver and CA View database high-level qualifiers and the session options to be used
  - Provide information used to build the XMS database table. Only the database high-level qualifier is used for VTAM XMS users.
- Specify the RMOAPPL=*applid* parameter. This parameter provides VTAM user signon capability.  
**Note:** When you are using multiple VTAM XMS regions, each region must have a unique *applid*.
- To pass VTAM signon requests to other XMS regions, specify the VTAMPASS=YES parameter.
- When you are using multiple VTAM XMS regions, the values for LGNFMT=, RMOVDTB=, VTMQUERY=, and VTMSAA= must be the same in each region. Otherwise, the XMS interface may react in unpredictable ways.
- To activate the VTAM generic resource support for your cross memory regions, specify the VGRAPPL= parameter.

**Note:** For more information about VTAM generic resources, see the following topic.

## VTAM Generic Resource Name

If the VGRAPPL parameter is specified in an EMAS complex, this parameter specifies a common VTAM generic resource name for the entire EMAS complex.

Specifying the common VTAM generic resource name in the session request can initiate VTAM cross memory sessions to any of the EMAS members.

When you are using the VTAM generic resource name, by default VTAM tries to request a session with an EMAS member in the same MVS image.

If it is not possible to get the session that was requested, VTAM uses normal load balancing when passing the session request to one of the active EMAS members.

## Install the CA Roscoe/Cross-Memory Online Retrieval Option

The CA Roscoe/cross-memory online retrieval option runs as a command processor under ETSO/Roscoe.

**Important!** This interface requires cross-memory services to be installed. For more information about cross-memory services, see the [Install Cross-Memory Services](#) section in this chapter. Be sure to set the parameter XMSSUB to YES in the JCL for the cross-memory services task.

### Installation Steps

The following steps are required to install the CA Roscoe/Cross-Memory Online Retrieval Option. Each step is explained in detail in the sections that follow.

1. (Optional) Concatenate the Load Module Library to the ETSOLIB DD statement, if the load modules were not copied to a linklist library.
2. Add the control statement for the RMOROS command processor to the Eligible Program List (EPL).
3. Invoke CA Roscoe/Cross-Memory Online Retrieval.

#### Step 1: (Optional) Concatenate the Load Module Library

If the load modules were *not* copied to a linklist library, concatenate the library that contains the load modules to the ETSOLIB DD statement in the CA Roscoe startup JCL, .

**Note:** If you have CA View, the CA View load modules must also be either in the linklist or in a ETSOLIB statement with this step.

#### Step 2: Add RMOROS Command Processor Statements

**Important!** This step is for CA Roscoe 6.0 and Higher.

Add these EPL control statements to member ETSOPGMS for the CA Roscoe user with the RO prefix:

Column	Contents
1–8	ECOXMROS
9	Blank
10–12	Number of users allowed to access CA Deliver at one time
13	Blank
14–17	CPU time slice (use 9999 to prevent premature termination)
18	Blank

Column	Contents
19–24	Maximum memory (in KB) below the 16 MB line This memory is only for the cross-memory driver program (50 KB is ample)
25	Blank
26–31	Maximum memory (in KB) below the line that CA Deliver can acquire at one time Use 999999 so that GETMAINS are not limited
32	Blank
33–38	Maximum memory (in KB) above the 16 MB line This memory is only for the cross-memory driver program (50 KB is ample)
39	Blank
40–45	Maximum memory (in KB) above the line that CA Deliver can acquire at one time Use 999999 so that GETMAINS are not limited
46	Blank
47–48	CP to call ECOXMROS as a TSO command processor
49	Y – Application authorized to issue MODESET SVC
50	Blank
51–52	CP to call ECOXMROS as a TSO command processor
53–255	Ignored

## CA Roscoe Cross-Memory Notes

Be aware of the following:

- Start the primary RMOXMS region with the XMSSUB=YES parameter.  
The XMSSUB=YES parameter must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.  
Only the primary XMS region can have XMSSUB=YES specified.
- The XMS regions must have the XMS=YES parameter to make it accessible.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA View and CA Deliver database high-level qualifiers.  
The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database as follows:

- SUBSYS= parameter of the cross-memory task.  
This parameter must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- RECON=YES can be used to allow reconnection (after a TSO terminal error) at the point of exit.
- TIMEOUT= specifies how long TSO is to wait for the XMS session to respond after the user enters input, in seconds.  
We recommend as high a value as possible but not less than 240 (4 minutes).

**Note:** The SUBMAX= parameter controls the number of user connections, not the USERMAX= parameter. USERMAX= only applies when using the subtask with the CICS interface.

## Install the CICS Pseudo-Conversational Option

**Important!** This option uses the cross-memory feature distributed with CA Deliver and must be installed with that feature. For more information about cross-memory, see [Install Cross-Memory Services](#).

## Installation Steps

The following steps are required to install the CICS Pseudo-Conversational Option. Each step is explained in detail in the sections that follow.

1. Place the CA Deliver load libraries into DFHRPL and STEPLIB.
2. Code the PCT and PPT Table Entries to CICS.
3. (Optional) Prepare the interface to a user-written CICS menu system.

### Step 1: Add Modules to DFHRPL and STEPLIB

The CA Deliver load library is required in the CICS DFHRPL and in the STEPLIB in the CICS region.

**Note:** If the CAI.CVDELOAD load library is in the linklist, it does not have to be included as a STEPLIB in the CICS region

Be sure that these modules are available in the DFHRPL concatenation of libraries.

1. EC0CICUX
2. EC0CIEND
3. EC0CINIT
4. EC0CISRV
5. EC0XMCIC
6. EC0C*version-number*

Where:

*release-number* represents the CICS release number.

- CTS 3.1 release number: 0640
- CTS 3.2 release number: 0650
- CTS 4.1 release number: 0660
- CTS 4.2 release number: 0670
- CTS 5.1 release number: 0680

You can copy the six modules to the DD statement DFHRPL in your CICS task. However, we strongly recommend that you concatenate CAI.CVDELOAD to the DD statement DFHRPL.

**Note:** Several CA Deliver modules are loaded (MVS load) from the CICS STEPLIB or LINKLIST. Verify that the entire CA Deliver load library is defined in the CICS STEPLIB or is included in the linklist.



## Step 2: Define Transaction and Programs to CICS

To access CA Deliver using CICS, define the required transactions and programs for the CICS interface.

Use the sample jobs described to define:

- Sample CA Deliver transaction: RMO1
- CA Deliver service transaction: XMC0
- Optional CA Deliver startup transaction: RMI
- Optional CA Deliver shutdown transaction: RMX
- CA Deliver CICS retrieval programs:
  - ECOCICUX
  - ECOXMCIC
  - ECOCINIT
  - ECOCIEND
  - ECOCISRV
  - ECOC0620
  - ECOC0621
  - ECOC0622
  - ECOC0630
  - ECOC0640
  - ECOC0650
  - ECOC0660
  - ECOC0670
  - ECOC0680
- Optionally, define one or more site-specific transaction identifiers for the pseudo-conversational program ECOXMCIC.

**Note:**

- You must define a separate, unique transaction identifier for each CA Deliver database you want to access under CICS.
- The sample job is located in CVDEJCL member CICS DLVR.

## Sample Job to Define CA Deliver Transactions and Programs to CICS:

```
//EXAMPLE JOB .....  
//*****  
//*      SAMPLE CICS JCL TO DEFINE PROGRAMS AND SAMPLE TRANSACTIONS      *  
//*      FOR CA DELIVER XMS INTERFACE                                     *  
//*                                                                 *  
//* NOTE:                                                                 *  
//*      UPDATE PROCEDURE SUBSTITUTIONAL PARAMETERS FOR                *  
//*      'CICSLOAD' AND 'CICSCSD' ACCORDING TO SITE STANDARDS.          *  
//*                                                                 *  
//*      MANUAL CHANGES ARE REQUIRED IN THIS JOB STREAM                *  
//*      TO UPDATE SYSIN PORTIONS BEYOND THE CONTROL                    *  
//*      OF THE PROCEDURE'S SUBSTITUTIONAL PARAMETERS.                  *  
//*                                                                 *  
//*      EDIT GROUP(GGGGGG) WHERE GGGGGG IS THE CICS DEFINED GROUP      *  
//*      FOR YOUR CA DELIVER CICS DEFINITIONS.                          *  
//*                                                                 *  
//*****
```

```

/**
//CICSXMS  PROC CICSLOAD='CICS.SDFHLOAD',
//          CICSCSD='CICS.DFHCSO'
//*****
/**  DEFINE SAMPLE Deliver TRANSACTION: RM01      *
/**  DEFINE SERVICE TRANSACTION:      XMC0        *
/**  DEFINE OPTIONAL STARTUP TRANSATION:  RMI      *
/**  DEFINE OPTIONAL TERMINATE TRANSATION: RMX      *
/**  DEFINE CA DELIVER CICS RETRIEVAL PROGRAMS:    *
/**      EC0CICUX                                *
/**      EC0XMCIC                                *
/**      EC0CINIT                                *
/**      EC0CISRV                                *
/**      EC0CIEND                                *
/**      EC0C0620                                *
/**      EC0C0621                                *
/**      EC0C0622                                *
/**      EC0C0630                                *
/**      EC0C0640                                *
/**      EC0C0650                                *
/**      EC0C0660                                *
/**      EC0C0680                                *
/**
/**  ** OPTIONAL **                               *
/**  DEFINE YOUR SITE SPECIFIC Deliver TRANSACTION. USE THE DEFINE *
/**  STATEMENTS FOR THE SAMPLE VW1 TRANSACTION AS YOUR MODEL.      *
/**
/**  THE FOLLOWING PARAMETERS DEFINE VIEW TRANSACTION ID: RMOT      *
/**
/**  DEFINE TRANS(RMOT) GROUP(GGGGGG) PROG(EC0XMCIC)              *
/**      TASKDATAL(ANY) TASKDATAK(CICS)                          *
/**
/**  WHERE GGGGGG IS THE CICS DEFINED GROUP FOR YOUR                *
/**  CA DELIVERCICS DEFINITIONS.                                    *
//*****
//STEP1  EXEC PGM=DFHCSO,REGION=1024K
//STEPLIB DD DSN=&CICSLOAD,DISP=SHR
//DFHCSO  DD DSN=&CICSCSD,DISP=SHR
//SYSPRINT DD SYSOUT=*
//SYSIN   DD DUMMY
/**
//  PEND
//CICSXMS EXEC CICSXMS
//STEP1.SYSIN DD *

```

```
DEFINE TRANS(RM01) GROUP(GGGGGG) PROG(EC0XMCIC)
    TASKDATAL(ANY) TASKDATAK(CICS)
DEFINE TRANS(XMC0) GROUP(GGGGGG) PROG(EC0CISRV)
    TASKDATAL(ANY) TASKDATAK(CICS)
DEFINE TRANS(RMI) GROUP(GGGGGG) PROG(EC0CINIT)
    TASKDATAL(ANY) TASKDATAK(CICS)
DEFINE TRANS(RMX) GROUP(GGGGGG) PROG(EC0CIEND)
    TASKDATAL(ANY) TASKDATAK(CICS)
DEFINE PROG(EC0CICUX) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0XMCIC) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0CISRV) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0CINIT) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0CIEND) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0620) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0621) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0622) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0630) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0640) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0650) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0660) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0670) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
DEFINE PROG(EC0C0680) GROUP(GGGGGG) LANGUAGE(ASSEMBLER)
    DATALOCATION(ANY) EXECKEY(CICS)
/*
```

## CICS Resource Definition Online Storage Protection

If you have CICS storage protection activated, resource definition online settings are required, as follows:

- For all transactions:  
TASKDATALOC=ANY  
TASKDATAKEY=CICS

- For all programs:

```
DATALOCATION=ANY  
EXECKEY=CICS
```

## PLT Start-up List

Add these table entries to the last phase of the PLT startup list to initialize the subtask that is used for cross-memory access:

```
DFHPLT TYPE=ENTRY, PROGRAM=DFHDELIM  
DFHPLT TYPE=ENTRY, PROGRAM=ECOCINIT
```

## PLT Shutdown List

Add these table entries to the first phase of the PLT shutdown list to ensure that the subtask that executes as part of the CA Deliver online facility correctly shuts down when CICS shuts down:

```
DFHPLT TYPE=ENTRY, PROGRAM=ECOCIEND  
DFHPLT TYPE=ENTRY, PROGRAM=DFHDELIM
```

## Optional DCT Entries

Specify a value for the DESTID parameter in the EBCXMOP macro in the ECOXMCTR module and corresponding DCT entries. This value defines a transient data destination for messages issued by the subtask.

**Note:** Specify a blank for DESTID to suppress the generation of informational messages from the subtask.

The DCT entries for a DESTID of XMC0 are:

```
RMOLOG  DFHDCT TYPE=SDSCI,   FOR CICS MESSAGES AND SHUTDOWN  
        BLKSIZE=250,   STATISTICS  
        BUFNO=1,  
        DSCNAME=RMOLOG,  
        RECFORM=VARUNBM,  
        RECSIZE=242,  
        TYPEFLE=OUTPUT  
XMC0G   DFHDCT TYPE=EXTRA,  
        DESTID=XMC0,  
        DSCNAME=RMOLOG
```

## Step 3: (Optional) Invoke the System from a CICS Menu System

If you want to invoke CA Deliver from a user-written CICS menu system, then return to that menu system when you exit from CA Deliver, do the following:

Invoke CA Deliver from the menu system by using this CICS command:

```
EXEC CICS START TRANSID(DELIVER transaction-id)  
      TERMID(EIBTRMID)  
      FROM(data-area)  
      LENGTH(4)
```

where:

**TRANSID(DELIVER *transaction-id*)**

Specifies the CA Deliver transaction ID.

**TERMID(EIBTRMID)**

Specifies the terminal that a CA Deliver transaction will communicate with.

**FROM (*data-area*)**

Specifies the optional variable length character string.

The format of the data-area parameter is:

*tran*,

where:

**tran**

Specifies the return menu CICS transaction to be started when CA Deliver finishes.

**Note:** None of the data-area parameters is required.

**LENGTH (4)**

Specifies the number of bytes in the data field being passed.

**Note:**

When CA Deliver receives control, it retrieves the four-byte return transaction ID and saves it from iteration to iteration.

If the retrieve fails, CA Deliver retains the information that it was started directly from a terminal, not a menu system.

When CA Deliver finishes processing, it determines whether it should return to a menu system by starting the return transaction.

If there is a saved transaction ID, CA Deliver starts the return transaction before it exits to CICS by issuing:

```
EXEC CICS START TRANSID(RETURN transaction-id)  
      TERMID(EIBTRMID)  
      NOCHECK
```

## CICS Notes

The cross memory CICS access involves two different address spaces: the CICS address spaces and the XMS address spaces.

## CICS Address Spaces

The user's CICS transactions and the cross memory support subtask reside in the address spaces.

- If multiple CICS regions are used to access CA Deliver, each CICS region will have an XMS support subtask.
- If you are using CICS/MRO, CA Deliver normally runs in an AOR (application region).

## XMS Address Spaces

Be aware of the following:

- The primary RMOXMS region can be started with the XMSSUB=YES or XMSSUB=NO parameter.
- CICS has a router subtask in its region and does not require the XMSSUB=YES function. However, we recommend that you start the primary XMS region with XMSSUB=YES.
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.  
Only the primary XMS region can have XMSSUB=YES specified.
- The XMS regions must have the XMS=YES parameter to be accessible.
- The SUBSYS= parameter must match the ECOXMCTR table entry for the CICS transaction.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA View and CA Deliver database high-level qualifiers.

The table contains an EBCXMOPT macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database as follows:

- SUBSYS= parameter can be used to route the CA Deliver transaction to an alternate XMS subsystem ID. The SUBSYS= of the cross memory task must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- TRANID=parameter specifies the CA Deliver transaction identifier for CICS.

- RECON=YES can be used to allow reconnection (after a CICS terminal error) at the point of exit.

**Note:** Do not specify RECON=YES if you use a multi-session manager that assigns LU names from a pool of names. Coding RECON=YES under these conditions could allow a user to be connected to another user's session. For more information, see Multi-Session Managers later in this chapter.

- TIMEOUT= specifies how long CICS is to wait for the XMS session to respond after the user enters input, in seconds.

We recommend as high a value as possible but not less than 240 (4 minutes).

## CICS XMS Subtask Startup

Use *one* of these methods to start the XMS subtask automatically:

1. When the CICS region is started, use the DFHPLTPI definition to automatically start the XMS subtask.
2. Define a transaction for the ECOCINIT program to allow for manual startup.
3. Write a CICS program to transfer control (XCTL) to ECOCINIT when you want to start the XMS subtask.

Until the XMS subtask is started, expect the transactions referencing ECOXMCIC to terminate with an error message that indicates that the XMS subtask is not active.

### **Note:**

- When the CICS region is terminated, the DFHPLTSD definition is to be used to terminate the XMS subtask.

You can manually terminate the XMS subtask through a user application program that LINKs the ECOCIEND or you can use the optional transaction defined for ECOCIEND for manual termination.

- If you want to terminate the XMS subtask manually, we recommend that you use the DFHPLTSD entry to terminate the XMS subtask. This definition is needed to clean up linkages to the XMS address spaces.
- To prevent users from shutting down the XMS subtask, secure the optional transaction for program ECOCIEND.



## Multi-Session Managers Using Virtual LU Names

Multi session manager products, for example CA TPX Session Management (CA TPX), can be configured to assign an LU name to a user's terminal at the time the user selects the CICS application.

**Important!** This assignment means that a user can enter CICS each time with a different terminal ID which can cause problems for CA Deliver application.

For example: If a user uses a multi-session manager to end a session, or shuts the PC down, CA Deliver does not know that the user has left. Another user might select CICS, be assigned to the same LU name as the previous user, and enter CA Deliver with the same terminal ID as the previous user. CA Deliver believes that there are two active users on the same terminal.

To prevent this situation, you can add a small amount of code to the CICS Autoinstall Control Program.

**Note:** The default name of this program is DFHZATDX and its source is located in SDFHSAMP.

If you are not a CICS systems programmer, discuss this situation with the person in your company who is responsible for CICS support and maintenance.

The sample code that follows shows how to clear an active user from the CA Deliver application at terminal deletion time. Insert this code in your Autoinstall Control Program.

The source that is shipped with CICS contains this line:

```
* ==> PUT DELETE CODE HERE
```

Insert the code after that line.

```

LOAD EP=EC0XSLOC,ERRET=RETURN
LR   R6,R0                GET EBCXSLOC ADDRESS
ICM  R8,B'1111',0(R6)      ADDR OF MAIN CONTROL BLOCK
BZ   RETURN               GET OUT IF NONE
LA   R7,4(,R8)            LOOK LIKE FIRST USER BLOCK
XSU_LOOP DS 0H
ICM  R7,B'1111',8(R7)      USER BLOCK ADDR
BZ   RETURN               GET OUT IF DONE
CLC  DELETE_TERM_ID,104(R7) FOR THIS TERMINAL?
BNE  XSU_LOOP             NO
TM   120(R7),X'01'        ACTIVE ENTRY?
BZ   XSU_LOOP             NO
OI   120(R7),X'02'        SHOW SESSION DONE
B    RETURN               EXIT PROGRAM

```

This code does the following:

1. Attempts to load program ECOXSLOC
  - If the load fails, this is not the region containing CA Deliver and it exits.
  - If CA Deliver is active in this region, the first word of ECOXSLOC contains the address of the main control block.  
If this word is zero, CA Deliver is not active and the program exits.
2. Scans the chain of CA Deliver user control blocks to find the terminal to be deleted
  - If the program finds the terminal ID, it makes sure that the user block is in use and is active, then it clears the appropriate fields.
  - If the block does not represent an active user, the program continues to search the chain to the end.
  - If the program gets to the end of the chain without finding the terminal ID, the program exits.
  - If you implement this change to the terminal deletion section of the Autoinstall Control Program, you can prevent the problems caused by the methods that were used to leave the CA Deliver application.

## Install the IMS Online Retrieval Option

Use these steps to install the IMS online retrieval option.

**Important!** This facility uses the cross-memory feature distributed with CA Deliver and must be installed with that feature. For more information about cross-memory, see [Installing Cross-Memory Services](#).

### Installation Steps

This list summarizes the steps required to install the IMS Online Retrieval Option. Detailed instructions are in the sections that follow.

1. Code the IMS TRANSACT, PSB and APPLCTN macros.
2. Run the PSB, ACB, and SYSGEN Procedures.
3. Load ECOIMSUX Modules.
4. Move load modules to IMSVS.PGMLIB.

**Important!** All JCL and macros provided in this section are provided as general examples only and must be modified for your site's systems and standards.

## Step 1: Code the Macros

Use the examples in this section as a guide as you code these macros, and implement them in your IMS system.

- (IMS) TRANSACT macro
- PSB macros
- APPLCTN macro

### TRANSACT Macro

One or more transactions must be defined for the IMS online retrieval program RMOXMIMS. Normally, only one transaction identifier is defined, although you can define multiple transactions.

This TRANSACT macro identifies the RMOXMIMS transaction to IMS:

```
TRANSACT NAME=EC0XMIMS,SPA=(18)
```

### PSB Macros

This PSB must be generated for the EC0XMIMS transaction:

```
PCB      TYPE=TP,ALTRESP=YES,MODIFY=YES
PSBGEN    PSBNAME=EC0XMIMS,LANG=ASSEM,COMPAT=YES
```

### APPLCTN Macro

This APPLCTN must be generated for the RMOXMIMS transaction:

```
APPLCTN  PSB=EC0XMIMS
```

## Step 2: Run the PSB, ACB, and SYSGEN Procedures

Use the macros created in Step 1. Code the Macros as input for these procedures:

```
PSBGEN
ACBGEN
IMS  SYSGEN
```

## Step 3: Load ECOIMSUX Modules

Move load modules ECOIMSUX to IMSVS.PGMLIB.

**Note:** ECOIMSUX is in CAI.CVDELOAD and must be copied to IMSVS.PGMLIB.

## IMS Notes (New Version)

Be aware of the following:

- The new IMS/DC Transaction Program (EC0XMIMS) is a replacement for the older RMOXMIMS program.
- The EC0XMIMS does not need to be linkedited to the ASMTDLI interface program. The transaction is now conversational with a SPASIZE=18 (this can be adjusted).
- If you use extended color, the SEGSIZE= may need to be increased, because extended color data streams can be a 50% increase over the monochrome data stream size.

To determine the SEGSIZE= value, take the terminal that will use the interface with the largest screen size, in bytes, and apply this formula:

$$\text{ROWS} * \text{COLS} * 1.5 = \text{SEGSIZE}$$

For example, a 3278-5 with a 27 x 132 screen size would be  $(27 * 132 * 1.5) = 5346$ . If the SEGSIZE= is too small, the terminal user will get an RC= "A6" message indicating that a message insert failed.

## IMS/DC Parameter Relationships

The cross-memory IMS/DC access involves up to three different address spaces as follows:

- IMS/DC message processing region address spaces

The user's IMS/DC transaction resides here. If multiple IMS/DC users are processing concurrently (input being processed by the XMS system), a separate IMS/DC message region is used for each user.

IMS/DC can control the maximum number of IMS/DC transactions executing at one time.
- The XMS support subtask
  - The subtask is started when the XMSSUB=YES input parameter is used when an XMS address space is started.
  - The subtask can be in a separate XMS address space or share the address space with XMS or VTAM sessions.
  - The XMSSUB=YES must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
  - If multiple XMS address spaces are started, only one can have the XMSSUB=YES specified.

**Note:** All IMS/DC, TSO/XMS, ISPF/XMS and CA Roscoe/XMS sessions share the same XMS subtask.

- XMS address spaces

See the topic that follows.

## IMS/DC Cross-Memory Notes

Be aware of the following:

- The primary RMOXMS region is to be started with the XMSSUB=YES parameter.  
This region can be in a separate XMS address space or share the address space with XMS or VTAM sessions.
- The XMSSUB=YES parameter must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMC0 or not specified).
- If multiple RMOXMS regions are started, they must be started with XMSSUB=NO parameter.  
Only the primary XMS region can have XMSSUB=YES specified.
- The XMS regions must have the XMS=YES parameter to make it accessible.
- The EBCXMCTR table must be assembled during installation to define the relationship between CA View and CA Deliver database high-level qualifiers. The table contains an EBCXMCTR macro to define initialization options and the EBCXMTRN macro for each CICS user transaction.

The EBCXMTRN macro also contains options for the specific database:

- SUBSYS= parameter of the cross-memory task.  
The parameter must match the SUBSYS= parameter specified in the EBCXMCTR table entry.
- RECON=YES can be used to allow reconnection (after an ISPF terminal error) at the point of exit.
- TIMEOUT= specifies how long ISPF is to wait for the XMS session to respond after the user enters input, in seconds.  
We recommend a value as high as possible but not less than 240 (4 minutes).

To abort the XMS session and return the user to ISPF or the TSO command prompt, press the ATTN key.

**Note:** The SUBMAX= parameter controls the number of user connections, not the USERMAX= parameter. USERMAX=only applies when you are using the subtask with the CICS interface.

To control screen size manually, use these operands. The SNA query command can also be used to determine the device characteristics.

Enter	For Terminal Type
M2	3278-2 24 x 80 default screen size
M2H	3278-2 24 x 80 highlighting

Enter	For Terminal Type
M2X	3279-2 24 x 80 color highlighting
M2C	3279-2 24 x 80 color
M3	3278-3 32 x 80
M3H	3278-3 32 x 80 highlighting
M3X	3279-3 32 x 80 color highlighting
M3C	3279-3 32 x 80 color
M4	3278-4 43 x 80 highlighting
M4H	3278-4 43 x 80 highlighting
M4X	3279-4 43 x 80 color highlighting
M4C	3279-4 43 x 80 color
M5	3278-5 27 x 132
M5H	3278-5 27 x 132 highlighting
M5X	3279-5 27 x 132 color highlighting
M5C	3279-5 27 x 132 color
M6	3290 62 x 80
M6H	3290 62 x 80 highlighting
M7	3290 31 x 160
M7H	3290 31 x 160 highlighting
M8	3290 62 x 160
M8	3290 62 x 160 highlighting

For other modifications to your system, see your VTAM programmer.

## TSO, ISPF, CA Roscoe and Cross-Memory Address Spaces

TSO, ISPF, or CA Roscoe cross-memory access involves address spaces and subtasks as follows:

- TSO or CA Roscoe address spaces

The TSO command, ISPF, or CA Roscoe application program resides here. If ISPF/XMS is being used with ISPF split-screen active, up to two sessions can be executing at the same time, to the same database or different databases.

- The XMS support subtask

This subtask is started when XMSSUB=YES input parameter is used when starting an XMS address space. The subtask can be in a separate XMS address space, or it can share the address space with XMS or VTAM sessions.

- The XMSSUB=YES must only be used in an XMS address space with a default subsystem ID (SUBSYS=XMCO or not specified).
- If multiple XMS address spaces are started, only one can have the XMSSUB=YES specified.

**Note:** All IMS/DC,TSO/XMS, ISPF/XMS, and CA Roscoe/XMS sessions share the same XMS subtask.

- XMS address spaces

The XMS regions must have the XMS=YES parameter to make them accessible.

**Note:** The SUBSYS= parameter must match the ECOXMCTR table entry for the database.

Multiple address spaces can be used if needed.

## Multiple Cross-Memory Region Requirements

Be aware of the following:

- All cross-memory regions started under the same SUBSYS ID are chained together.
- The REGIONID positional parameter is the first value of the PARM= statement for the cross-memory task.  
You must specify a different REGIONID for each started cross-memory region.
- The value of the XMSSUB parameter for the primary region depends on the type of XMS region you are defining.

See this table for the XMSSUB values. Specify XMSSUB=NO for all other started regions.

Primary Region Type	XMSSUB Recommendation
Non-VTAM	Must use XMSSUB=YES
CICS	Recommend using XMSSUB=YES
VTAM-only	XMSSUB=NO use allowed

**Note:**

- You must specify XMS=YES for all other started regions except for VTAM only regions where XMS=NO is permissible.
- Each VTAM cross-memory region requires a different *applid*. The *applid* is specified using the RMOAPPL= parameter.
- Each VTAM cross-memory region requires VTAMPASS=YES.
- The VTAM administrator must verify that each VTAM cross-memory applid has this setting:

AUTH=(PASS,ACO) .

## Prepare to Start the Cross Memory Task

**Follow these steps:**

1. (Optional) Add the start procedure to PROCLIB for the cross-memory online task.
2. (Optional) Modify, assemble, and link edit the ECOXMCTR module.
3. Define security requirements for CA Top Secret Security (eTrust CA-Top Secret).

## Start the Cross Memory Task

Start the XMS CBROSDRV procedure.



# Chapter 11: Installing the Features

---

This chapter describes the CA Deliver features and provides information about how to:

1. Change the date format on panels
2. Set up the CA 11 interface
3. Set up CA 11 to run with CA Deliver
4. Install the CA GSS (Global Subsystem) interface
5. Install the CA Deliver host command environment into CA GSS

This section contains the following topics:

[Change the Date Format Shown on Panels](#) (see page 209)

[Set Up the CA 11 Interface](#) (see page 211)

[Set Up CA 11 to Run with CA Deliver](#) (see page 212)

[Install the Host Command Environment into CA GSS](#) (see page 214)

## Change the Date Format Shown on Panels

The date format, date separator character, and time separator characters are specified in the RMODFMT load module.

The date format is specified in the first byte (hex location 00) of the load module as a hexadecimal value of 00 through 07 as follows:

Date Format	Hexadecimal Value
MM/DD/YYYY (default)	00
DD/MM/YYYY	01
YYYY/MM/DD	02
YYYY/DD/MM	03
MM/DD/YY	04
DD/MM/YY	05
YY/MM/DD	06
YY/DD/MM	07

- A date separator character can be assigned in the second byte (hex location 01) of the load module. The default data separator is a slash (/).
- A time separator character can be assigned in the third byte (hex location 03) of the load module.

The default time separator is a colon (:).

**Note:** Use printable characters that are not likely to be confused with syntactical data, such as a comma or a quotation mark for the date and time separator characters.

- Use USERMOD BRNSDFMT in CAI.CVDEJCL to set values in RMODFMT.

Change the values in the REP statements in the AMASPZAP input to the values that you want.

For example, if you selected MM/DD/YY for your default format, a dash (-) for the date separator, and no change for the time separator, change the AMASPZAP statements in BRNSDFMT as follows:

```
From:      ++ZAP(RMODFMT).
           NAME RMODFMT RMODFMT
           VER 0000 0061,7A00
           REP 0000 0061,7A00
           $$

To:        ++ZAP(RMODFMT).
           NAME RMODFMT RMODFMT
           VER 0000 0061,7A00
           REP 0000 0460,7A00
           $$
```

- The first field in the VER and REP statements contains the location in the module that is being changed. In this case, it is 0000. Do not change this value.
- The second field contains four hexadecimal values separated into groups of two by a comma.
- The VER statement verifies that the values in this statement are the same as the values found at location 0000 in RMODFMT.
- The REP statement gives the values that will replace the data at location 0000 in RMODFMT.

In the preceding example:

- The first position in field 2 in the REP statement was changed from 00 to 04 to specify the MM/DD/YY date format as defined in the preceding table.

- The second position was changed from 61 (/) to 60 (-).
- The third position is unchanged since we are not changing the time separator in this example.
- The fourth position is never changed.

**Note:** If you want to make a change to RMODFMT, you must reapply this USERMOD.

## Set Up the CA 11 Interface

To set up an interface between CA 11 and CA Deliver, verify that one or more of the following conditions exist:

- You use two or more CA Deliver databases.
- CA Deliver and CA 11 run on different operating systems and use the CA Deliver network input feature.
- Another vendor program is installed which does not allow you to specify the CA Deliver database name through parameters on the EXEC statement.
- You use both CA Deliver and CA Balancing Report Control (CA Balancing).

To set up an interface between CA 11 and CA Deliver:

1. Create a sequential data set to specify parameters for the CA Deliver and CA 11 interface program.

In this data set, specify the names of the CA Deliver databases and the destination where CA 11 runs.

2. If CA 11 is executing on a different operating system, specify the name of this data set in the RMOPARMS DD statement when you set up the CA 11 procedure catalog for CA Deliver.

In this data set, specify the subsystem name of the CA L-Serv Database Manager that is to manage the CA Balancing database (if CA Balancing is used with CA Deliver).

## Data Set Attributes

These attributes are needed to specify the data set referenced in the RMOPARMS DD statement:

- DSORG=PS
- RECFM=FB
- LRECL=80

## Data Set Statements

In this data set, specify these two control statements:

- One or more names of the CA Deliver databases that are used.
- The name of the JES2 or JES3 destination on which CA 11 runs, if it is executing on a different operating system.

## Syntax of Control Statements in the Data Set

The syntax of the statement used to specify the name of a CA Deliver database is:

```
NAME high-level-name
```

where *high-level-name* represents the name of the CA Deliver database.

The syntax of the statement used to specify the name of the destination on which CA 11 runs is:

```
FROM-NODE NAME=JES2/JES3-dest-where-CA 11-runs
```

where *JES2/JES3-dest-where-CA 11-runs* represents the name of the originating destination on which CA 11 runs.

These control statements are also described in the *Reference Guide*.

If there are identical job definitions in different CA Deliver databases, maintain the order of the CA Deliver databases in the data set referenced in the RMOPARMS DD statement for your entire execution.

## Set Up CA 11 to Run with CA Deliver

To use CA 11 with CA Deliver and store reports in CA View, use CA View Release 11.5 or higher and CA Deliver Release 11.5 or higher, and then follow these steps:

1. Change the program name in the first step of your JCL for the CA 11 job:

```
//STEP1    EXEC    PGM=U11RMS,PARM='U11RMS-parms', or,  
//STEP1    EXEC    PGM=UCC11RMS,PARM='UCC11RMS-parms'
```

## 2. Change the utility name RMORMS:

```
//STEP1 EXEC PGM=RMORMS,PARM='U11RMS-parms', or,
//STEP1 EXEC PGM=RMORMS,PARM='UCC11RMS-parms'
```

If the program in the CA 11 JCL shown above is anything other than U11RMS, or if you have any program that wraps around the CA 11 program, contact CA Technical Support.

**Note:** For a description of RMORMS, see the *Reference Guide*.

3. Do *one* of the following:

- If two or more CA Deliver databases are used or CA Balancing is used, add this RMOPARMS DD data set name statement to the JCL for the CA 11 job:

```
//RMOPARMS DD DSN=sequential-data set-name,DISP=SHR
```

- If only one is used, insert the name of the single CA Deliver database as a parameter in front of the CA 11 program name parameters:

```
//STEP1 EXEC PGM=RMORMS,PARM='RMO-db;U11RMS-parms', or,
//STEP1 EXEC PGM=RMORMS,PARM='RMO-db;UCC11RMS-parms'
```

4. Determine if CA Deliver executes on a destination other than CA 11 and if the CA Deliver network input feature is used, then do *one* of the following:

- If the answer is yes to one of the above, go to Step 5.
- If the answer is no to both of the above, go to Step 9.

## 5. Insert this statement on the last line of the RMOPARMS data set:

```
FROM-NODE JES2/JES3-dest-where-CA 11-runs
```

## 6. Insert the following DD statement in the first step (the RMORMS Step) of your JCL:

```
//RMONETn DD SYSOUT=(x,,form-name),DEST=dest-where-RMO-runs
```

**Note:** CA Deliver uses the output from this DD statement to determine whether the job that is currently running is a rerun job.

## 7. Set the initialization parameter NETRERUN to YES.

## 8. Load the CA Deliver modules to the destination where CA 11 is going to execute:

- ECOMSG
- ECOSDIM
- ECOSVC35
- RMORCH
- RMORMS

## 9. Set the initialization parameter MAXHIST to the maximum number of generations that are expected to rerun jobs.

To back out only reports produced within the last five generations, set MAXHIST=5.

**Note:** If the historical data report that you want to rerun has been purged, CA Deliver cannot delete or flag these reports. You must manually delete these reports.

For more information about deleting reports manually, see the *CA Deliver Administrator Guide*.

10. To rerun jobs that produce bundled reports and to specify when and how the bundles are to be produced, use:

- The LATE, INTERVAL, WAIT, and BUNDLE CONFIRM fields on the Bundle Definition Attributes panel
- The Print Bundle Now tabular command P on the Active Bundle List panel

**Note:** For more information about the Bundle Definition Attributes Panel, the Active Bundle List panel and the Print Bundle Now tabular command P, see the *Administration Guide*.

CA Deliver cannot delete or flag bundle-holding copies if bundles have already been queued for printing.

The RMORMS utility transmits the current rerun information from the originating system on which CA Deliver is not installed to the receiving systems.

11. Review the RMSWARN initialization parameter in the *Reference Guide*. This parameter affects how RMORMS reacts when the started task is not active.

## Install the Host Command Environment into CA GSS

CA GSS (Global Subsystem) for MVS Release 2.6 is required for this installation.

To install the CA Deliver host command environment interface module into CA GSS, do the following:

1. Be sure that MVS/TSO is running.
2. Ensure that CA GSS is installed on your system.
3. Look at the data set and member that are allocated to the PARMLIB DDNAME in CA GSS.
4. Edit the data set/member and add the following line:  
ADDRESS DELIVER RMOINTF
5. Add the CA Deliver load library to the concatenation of the CA GSS command procedure.
6. Restart CA GSS.

# Appendix A: Installation Worksheets

---

This appendix contains worksheets to use to record your installation, initialization, and started task parameters

This section contains the following topics:

[Installation Worksheet](#) (see page 215)

[Initialization Parameter Worksheet](#) (see page 216)

[Started Task Worksheet](#) (see page 219)

## Installation Worksheet

This worksheet contains the SMP/E and system-related items required for the product installation. Fill out this worksheet carefully and retain this information for future reference.

### Step 1: Global Install Parameters

- Enter \ and your standard SYSOUT class for CA product installs and SMP output.

Default: SYSOUT=\_\_\_\_\_

SYSOUT=\_\_\_\_\_

- Enter the installation product tape VOLSER.

Default: TAPVOL=\_\_\_\_\_

TAPVOL=\_\_\_\_\_

- Enter the name for the started task.

Default: STCNAM=CAHBB0ST

STCNAM=\_\_\_\_\_

### Step 2: Data Set Qualifiers and SMP Parameters

- Enter the data set high-level qualifiers you plan to assign to the common distribution, target, and SMP libraries.

Default: CAI='CAI.'

CAI=\_\_\_\_\_

Default: DSHLQ='CAI.'

DSHLQ=\_\_\_\_\_

- Enter your generic unit name for permanent work DASD volumes.

Default: PERMDA=SYSDA

PERMDA=\_\_\_\_\_

- Enter your generic unit name for temporary work DASD volumes.

Default: WORK=SYSDA

WORK=\_\_\_\_\_

- Enter your generic unit name for the tape drives.

Default: TAPE=TAPE

TAPE=\_\_\_\_\_

- Enter the DASD pack you plan to use as your SMP temporary library volume.

Default: TLIB=DUMSER

TLIB=\_\_\_\_\_

## Initialization Parameter Worksheet

Parameter	Value
ARCH	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
ARCH__	
AUTHTID	
AUTOACT	
BANNER	
BEGINDAY	
BNDLBNR1	



Parameter	Value
BNDLBNR2	
BNDLBNR3	
BNDLCLS	
BNDLCONF	
BNDLDEST	
BNDLHDTL	
BNDLINT	
BNDLMOUT	
BNDLSCAN	
BNDLWAIT	
BOT	
CCX	
DAYS	
DEFDEL	
DEFOUT	
DEFREPT	
DEFRVIEW	
EFORMAT	
EMAILQ	
EXTSEC	
FEATURE	
FREEALL	
GSS	
HDETAIL	
HISTCNT	
INBSSN	
JOBCLSL	
JOBREF	
LOGO	
MAXHIST	

Parameter	Value
MAXJESQ	
NAME	
NETCLSL	
NETDEST	
NETFORM	
NETONLY	
NETREQUE	
NETRERUN	
NETUNDEF	
OFFPW	
OUTPUT	
PRBTASK	
PREVRUN	
REDISP	
RMSWARN	
RPTENQ	
RPTNPROD	
SAR	
SARBUFACT	
SECMSG	
SETCMD	
SETPAGE	
SETPW	
SMF	
SMF30	
START	
STKCHNn	
STKMODE	
STKNOTXT	

Parameter	Value
STNAME <sub>n</sub> (1, 2, 3, 4, 5)	
STOPPW	
SYSCLSL	
SYSID	
TEXT	
TIME	
WARNING	
WEBSVR1	
WEBSVR2	
WEBSVR3	
WEBSVR4	
WRITER	

## Started Task Worksheet

Use this worksheet to list the data set names that are to be used in various steps of the installation process.

### Initialization Parameter

DDname: RMOPARMS

Data set name: \_\_\_\_\_

### Job Name Translation Control

DDname: RMOJTAB

Data set name: \_\_\_\_\_



# Appendix B: Integration with CA OPS/MVS EMA

---

This section contains the following topics:

[Overview](#) (see page 221)

[Ensure that CA OPS/MVS Is Enabled for Capturing These Events](#) (see page 222)

[CA Deliver Active State Events](#) (see page 222)

[CA Deliver Heartbeat Events](#) (see page 224)

## Overview

CA Deliver provides seamless integration with CA OPS/MVS by automatically communicating both active status events and heart beat events to CA OPS/MVS. The enabling technology for this is through a generic event API call that CA OPS/MVS provides the other mainframe products so that they can communicate events to CA OPS/MVS.

You do not need to do anything for CA Deliver to enable this event communication interface to CA OPS/MVS. If CA Deliver and CA OPS/MVS are active in the same z/OS image, CA Deliver automatically communicates these automation events to CA OPS/MVS.

By generating active status events CA Deliver and other CA products are able to communicate to CA OPS/MVS's System State Manager (SSM) component when they are starting, up, stopping or down.

SSM is a built-in feature that uses an internal relational data framework to proactively monitor and manage started tasks, online applications, subsystems, JES initiators, and other z/OS resources including your CA mainframe products. SSM compares the current state of online systems, hardware devices, and the other resources with their desired state, and then automatically makes the necessary corrections when a resource is not in its desired state. This provides proactive and reactive state management of critical resources.

Before the CA OPS/MVS interface existed, CA OPS/MVS could automate active status events for your CA products; however this typically required monitoring unique messages for each CA product. With this interface, CA OPS/MVS can capture these events for any of your CA products with a single automation event rule.

With the heart beat event, CA Deliver can communicate a normal, warning, or problem overall health status and reasoning to CA OPS/MVS on a regular interval. Once CA Deliver begins generating heart beat events for CA OPS/MVS, CA OPS/MVS can also react to the lack of a heart beat event from CA Deliver, treating this as an indication that there is either a potential problem with CA Deliver, or there is a larger system-level problem that is taking place.

## Ensure that CA OPS/MVS Is Enabled for Capturing These Events

To ensure that this CA OPS/MVS interface is active, make sure the CA OPS/MVS parameter APIACTIVE is set to its default of ON. This allows CA OPS/MVS to acknowledge and process the events generated by CA Deliver and other CA products through this interface.

## CA Deliver Active State Events

CA Deliver provides a direct interface to the CA OPS/MVS System State Manager (SSM) application to notify CA OPS/MVS of the current operating state of the given CA Deliver address space. The CA OPS/MVS SSM application can use this information to automatically control the operation of the CA Deliver address space, as well as any other address space that is dependent upon the CA Deliver address space being active. For more information on using CA OPS/MVS SSM see the CA OPS/MVS User Guide.

The CA Deliver product active state is presented to CA OPS/MVS and can be processed by the following rule:

```
)API CASTATE
```

The available OPS/REXX variables for CA Deliver product state management are:

<b>OPS/REXX Variable</b>	<b>Value</b>
API.APPLICATION	CA Deliver
API.VERSION	Current release
API.LEVEL	00000
API.EVENTID	CASTATE
API.MSGID	CASTATE
API.TEXT	State of CA Deliver

The API.TEXT variable has the following format:

State of *appl\_id* is *current\_state*'

**appl\_id**

Specifies the same value as the API.APPLICATION variable

**current\_state**

**STARTING**

Indicates that CA Deliver is initializing

**UP**

Indicates that CA Deliver is active

**STOPPING**

Indicates that CA Deliver is terminating

**DOWN**

Indicates that CA Deliver is exiting the system

For more information on how to use the CASTATE API, see the member SSMCAAPI of opsmvsHLQ.STATEMAN.RULES.

## CA Deliver Heartbeat Events

CA Deliver provides a continuous heartbeat event directly to CA OPS/MVS. CA OPS/MVS can use this information in several ways to determine the operational health of the CA Deliver product.

CA Deliver issues a heartbeat update every nnnn seconds that notifies CA OPS/MVS of the current operational health of the CA Deliver product.

If CA Deliver detects a health state change, it immediately generates a heartbeat update without waiting for the nnnn second heartbeat interval to expire. In this way, CA Deliver provides CA OPS/MVS with a constant operational health state view of the CA Deliver product.

CA OPS/MVS can also react to the lack of a heartbeat update from CA Deliver and an indication that there is either a potential problem with CA Deliver, or there is a larger system level problem that is taking place.

The CA Deliver product heartbeat event is presented to CA OPS/MVS and can be processed by the following rule:

```
)API CAHEARTBT
```

The available OPS/REXX variables for CA Deliver state management are:

OPS/REXX Variable	Value
API.APPLICATION	CA Deliver
API.VERSION	Current release
API.LEVEL	00000
API.EVENTID	CAHEARTBT
API.MSGID	CAHEARTBT
API.TEXT	State of CA Deliver



The API.TEXT variable has the following format:

appl\_id Status: *heartbeat\_state* Reason: reason\_text

**appl\_id**

Specifies the value of the API.APPLICATION variable.

**heartbeat\_state**

Heart\_beat\_state can be one of the following:

**NORMAL**

Indicates that CA Deliver is operating normally, without any detected problems.

**WARNING**

**PROBLEM**

**reason\_text**

reason\_text explains the problem as reported by the event API call.

For information on how you use the CAHEARTBT API, see members APIHRTB1, APIHRTB2, and APIHRTB3 of opsmvsHLQ.SAMPLE.RULES.



# Index

---

## A

- abend output • 167
- access
  - login • 30
- adding variables • 98
- allocate and mount • 37
- attributes • 98, 211
  - data set • 211
  - highlight • 98

## B

- BROWSE panel, customizing the • 98

## C

- CA 11 • 211, 212
  - interface setup • 211
  - originating destination name of • 212
- CA Common Services • 18
  - definition of • 18
- CA GSS (Global Subsystem) • 214
  - command procedure • 214
- CA MSM usage scenarios • 25
- CA Roscoe • 90, 131, 148
  - Cross-Memory Online Retrieval Option • 131
  - interface driver • 148
  - Online Retrieval Option • 90
- CAI Resource Initialization Manager (CAIRIM) • 18, 81
- CAI.SAMPJCL
  - library • 58
  - sample jobs • 58
- CAIRIM (CAI Resource Initialization Manager) • 18, 81
- CANCEL parameter • 158
- CICS • 136
  - menu system • 136
- color, defining for panels • 98
- command libraries, adding • 84
- concatenation, PROCLIB • 21
- constants, modifying • 98
- contacting technical support • 3
- control statements • 212
  - syntax of • 212
- copy files to USS directory • 40, 41, 44

- CPU id • 81
- cross-memory • 147, 148, 158
  - drivers • 148
  - interface parameter requirements • 158
  - interfaces, installing • 147
  - services (XMS) • 147, 158
    - advantages • 147
    - parameter • 158
- customer support, contacting • 3

## D

- data set • 211, 212
  - attributes • 211
  - statements • 212
- data sets, SVC dump • 20
- database name • 212
- date • 81
  - LMP key certificate expiration • 81
- deleting variables • 98
- distribution • 15
  - libraries • 15
- download
  - files using ESD • 33
  - options • 40
  - overview • 31
  - to mainframe through a PC • 44
  - using batch JCL • 41
- drivers, cross-memory • 148
- dump • 20, 21, 167
  - analysis and elimination • 20
  - output • 167
  - parameters, system • 21

## E

- EBC (Extended Base Component), library • 15
- EBCUDUMP DD statement • 167
- ETSO • 90
- ETSOLIB DD statement • 90
- EXEC statement • 211
- execution • 81, 148
  - keys • 81
  - restrictions • 148
- expiration date, LMP key certificate • 81
- Extended Base Component (EBC), library • 15
- external HOLDDATA • 53

---

## F

free space • 36

## G

GIMUNZIP utility • 46

global install parameters • 215

## H

hardware requirements • 15

hash setting • 46

HELP panel, customizing the • 98

hexadecimal characters, reserved • 98

high-level qualifier • 46

highlight attributes • 98

HOLDDATA • 53

host command environment • 214

## I

IEBCOPY • 58

initialization • 18

    routines • 18

Initialization Parameter Worksheet • 215, 216

installation • 215

    worksheets • 215

installing • 18, 89, 117, 118, 131, 147, 149

    CA Roscoe Cross-Memory Online Retrieval  
    Option • 131

    cross-memory • 147

        interfaces • 147

    from Pax-Enhanced ESD • 31

    from tape • 57

    ISPF • 118, 149

        Cross-Memory Online Retrieval Option • 118

        online retrieval option • 149

    MVS interfaces • 18

    online interfaces • 117

    software • 18

    TSO online retrieval option • 89

Integrated Cryptographic Services Facility (ICSF) • 46

internal HOLDDATA • 53

ISPF • 118, 148, 149

    Cross-Memory Online Retrieval Option • 118

    interface driver • 148

    online retrieval option, installing • 149

ISPTLIB DD statement • 84

ISPUTIL utilities menu • 88

## J

Java version support • 46

JCL • 21

    procedures • 21

job name translation control • 219

## K

key certificate • 81

## L

length of variables • 98

LGNFMT parameter • 158

LGNPROP parameter • 158

LGNSEC parameter • 158

libraries • 15, 84

    distribution • 15

    panel and command • 84

library • 15

    EBC (Extended Base Component) • 15

License Management Program (LMP) • 81, 82, 83

    encrypted code • 81

    execution key • 81

    execution software parameter • 82

    key certificate • 81

    licensing agreement for • 82

    multiple codes • 83

LMP (License Management Program) • 81, 82, 83

    encrypted code • 81

    execution key • 81

    execution software parameter • 82

    key certificate • 81

    licensing agreement for • 82

    multiple codes • 83

LONGWAIT parameter • 158

## M

macros • 169

    format of • 169

maintenance • 62

menus • 88

    ISPUTIL utilities • 88

MIS director, specifying the • 81

modifying constants • 98

MSGLVL parameter • 158

multiple LMP codes • 83

MVS interfaces, installing • 18

---

## N

network input feature • 211  
NEWAPPL(RMO) • 85

## O

OLIB • 98  
online • 117  
    interfaces • 117  
    installing • 117  
OPTLIB • 82  
originating destination name of CA 11 • 212

## P

panel libraries, adding • 84  
parameters • 21, 118, 158, 161, 215  
    CANCEL • 158  
    install • 215  
    LGNFMT • 158  
    LGNPROP • 158  
    LGNSEC • 158  
    LONGWAIT • 158  
    MSGLVL • 158  
    REGIONID • 161  
    RMOAPPL • 158  
    RMOVTDDB • 158  
    SMFSESS • 158  
    SUBSYS • 158  
    system dump • 21  
    USERMAX • 158  
    VTAMPASS • 158  
    VTAMSAA • 158  
    VTMQUERY • 158  
    XMS (cross-memory services) • 158  
    XMSSUB • 118, 158  
pax ESD procedure  
    copy product files • 40  
    create product directory • 45  
    download files • 33  
    receive the SMP/E package • 47  
    set up USS directory • 36  
pax file  
    copy files to USS directory • 40, 41, 44  
position of variables • 98  
procedures, JCL • 21  
process overview • 31  
PROCLIB • 21  
product • 81

code • 81  
product download window • 33  
product-level directory • 45  
products, automatic startup of • 18

## Q

Qname • 104

## R

read me • 31, 46  
REGIONID parameter • 161  
reprints • 148  
requirements for installing • 15  
    hardware • 15  
RESERVE • 104  
restrictions, execution • 148  
RMOAPPL parameter • 158  
RMOLOG DD • 167  
RMOVTDDB parameter • 158  
RMOXMS region • 167

## S

sample JCL • 58  
sample jobs • 41, 45  
    CAtoMainframe.txt • 41  
    Unpackage.txt • 45  
SARINIT initialization utility • 105  
SDUMP (SVC dumps) • 20  
segments, overlapping • 90, 118, 125, 127, 131, 133, 149  
site contact, technical • 81  
SMF exits • 18  
SMFSESS parameter • 158  
SMP/E  
    GIMUNZIP utility • 46  
    receive the package • 47  
software • 18  
    installation • 18  
stacked reports containing overlapping segments • 90, 118, 125, 127, 131, 133, 149  
Started Task Worksheet • 215, 219  
statements • 84, 90, 212  
    data set • 212  
    ETSOLIB DD • 90  
    OSPTLIB DD • 84  
    STEPLIB • 84  
    STEPLIB DD • 84  
STEPLIB • 84

---

- STEPLIB DD • 84, 168
- storage requirements, estimating • 15
- SUBMIT • 148
- support, contacting • 3
- SVC • 18, 20
  - dumps (SDUMP) • 20
  - eliminating user • 18
- syntax of control statements • 212
- SYSPRINT DD statement • 167
- system • 21, 104
  - dump parameters • 21
  - integrity product • 104

## T

- tape, installing from • 57
- technical • 81
  - site contact • 81
- technical support, contacting • 3
- TSO • 89, 148
  - interface driver • 148
  - online retrieval option, installing • 89
  - SUBMIT • 148

## U

- UNIX System Services (USS)
  - access requirements • 31, 36
  - directory cleanup • 51
  - directory structure • 36
- UNZIPJCL • 46
- user • 149
  - exits • 149
- USERMAX parameter • 158

## V

- variables • 98
  - adding • 98
  - deleting • 98
  - length of • 98
  - position of • 98
- verifying software installation • 18
- VTAMPASS parameter • 158
- VTAMSAA parameter • 158
- VTMQUERY parameter • 158

## W

- worksheets • 215, 219
  - Initialization Parameter • 215
  - installation • 215

- Started Task • 215, 219

## X

- XMS (cross-memory services) • 147, 158
  - parameter • 158
- XMSSUB parameter • 118, 158