

CA Identity Manager

Installation Guide (WebSphere)

r12



Third Edition

This documentation and any related computer software help programs (hereinafter referred to as the "Documentation") is for the end user's informational purposes only and is subject to change or withdrawal by CA at any time.

This Documentation may not be copied, transferred, reproduced, disclosed, modified or duplicated, in whole or in part, without the prior written consent of CA. This Documentation is confidential and proprietary information of CA and protected by the copyright laws of the United States and international treaties.

Notwithstanding the foregoing, licensed users may print a reasonable number of copies of the Documentation for their own internal use, and may make one copy of the related software as reasonably required for back-up and disaster recovery purposes, provided that all CA copyright notices and legends are affixed to each reproduced copy. Only authorized employees, consultants, or agents of the user who are bound by the provisions of the license for the Product are permitted to have access to such copies.

The right to print copies of the Documentation and to make a copy of the related software is limited to the period during which the applicable license for the Product remains in full force and effect. Should the license terminate for any reason, it shall be the user's responsibility to certify in writing to CA that all copies and partial copies of the Documentation have been returned to CA or destroyed.

EXCEPT AS OTHERWISE STATED IN THE APPLICABLE LICENSE AGREEMENT, TO THE EXTENT PERMITTED BY APPLICABLE LAW, CA PROVIDES THIS DOCUMENTATION "AS IS" WITHOUT WARRANTY OF ANY KIND, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT. IN NO EVENT WILL CA BE LIABLE TO THE END USER OR ANY THIRD PARTY FOR ANY LOSS OR DAMAGE, DIRECT OR INDIRECT, FROM THE USE OF THIS DOCUMENTATION, INCLUDING WITHOUT LIMITATION, LOST PROFITS, BUSINESS INTERRUPTION, GOODWILL, OR LOST DATA, EVEN IF CA IS EXPRESSLY ADVISED OF SUCH LOSS OR DAMAGE.

The use of any product referenced in the Documentation is governed by the end user's applicable license agreement.

The manufacturer of this Documentation is CA.

Provided with "Restricted Rights." Use, duplication or disclosure by the United States Government is subject to the restrictions set forth in FAR Sections 12.212, 52.227-14, and 52.227-19(c)(1) - (2) and DFARS Section 252.227-7014(b)(3), as applicable, or their successors.

All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Copyright © 2009 CA. All rights reserved.

CA Product References

This document references the following CA products:

- CA Identity Manager
- CA SiteMinder® Web Access Manager
- CA Security Command Center (SCC)
- CA Audit
- eTrust® Directory, also known as CA Directory

Contact CA

Contact Technical Support

For your convenience, CA provides one site where you can access the information you need for your Home Office, Small Business, and Enterprise CA products. At <http://ca.com/support>, you can access the following:

- Online and telephone contact information for technical assistance and customer services
- Information about user communities and forums
- Product and documentation downloads
- CA Support policies and guidelines
- Other helpful resources appropriate for your product

Provide Feedback

If you have comments or questions about CA product documentation, you can send a message to techpubs@ca.com.

If you would like to provide feedback about CA product documentation, complete our short [customer survey](#), which is also available on the CA support website, found at <http://ca.com/support>.

Contents

Chapter 1: Installation Overview	11
Sample Identity Manager Installations	11
Basic Installation	11
Installation with Provisioning Components	13
Installation with SiteMinder Policy Server	15
Installation Process	17
Installation Worksheet	17
 Chapter 2: Identity Manager Prerequisites	 19
Installation Status	19
Prerequisite Knowledge	20
How to install Prerequisite Components	20
Hardware Requirements	21
Software Requirements	21
Access the Identity Manager Support Matrix	22
Create a Database	22
WebSphere Application Server	23
Install a WebSphere Application Server	23
Verify the WebSphere Application Server	24
 Chapter 3: Installing Identity Manager Components	 25
Installation Status	25
Identity Manager Components	26
How to Install Identity Manager Components	26
Gather Information for the Installation	26
WebSphere Information	27
Provisioning Information	27
Database Information	28
iRecorder Information	29
SiteMinder Information	29
Check for Identity Manager Cumulative Releases	30
Important Notes for Installation	30
Installation Log Files	31
Install Identity Manager Components	32
Production Environments	33
Demonstration Environments	34

Install Additional Components	35
Install the Identity Manager Bookshelf	36

Chapter 4: Starting Identity Manager 37

Installation Status	37
How to Start Identity Manager	38
Start the Identity Manager Server	38
Verify that Identity Manager Started	39
Advanced Configuration	39

Chapter 5: Protecting Identity Manager with SiteMinder 41

Installation Status	41
How Resources are Protected	42
How to Protect Identity Manager with SiteMinder	42
Install the SiteMinder Web Agent	43
Install the Proxy Plug-In	45
Verify the Web Agent and Connector	46
Configure the Policy Store for Identity Manager	47
Configure a Relational Database	47
Configure Sun Java Systems Directory Server or IBM Directory Server	48
Configure Microsoft Active Directory	48
Configure Microsoft ADAM	50
Configure eTrust Directory Server	50
Configure Novell eDirectory Server	52
Configure Oracle Internet Directory (OID)	52
Verify the Policy Store	53

Chapter 6: Configuring Provisioning 55

Installation Status	55
Important Notes for Provisioning Installation	56
How to Configure Provisioning	56
Provisioning Manager Setup	57
Configure the Provisioning Manager	57
Optional Provisioning Components	58
Java Connector Server	58
Connectors	59
High Availability	59

Chapter 7: Configuring Email Notification	61
Installation Status	61
How to Configure Email Notification	62
Configure SMTP Settings	62
Enable Email Notification	63
 Chapter 8: Configuring Workflow	 65
Installation Status	65
How to Configure Workflow	65
Enable Workflow	66
Configure WorkPoint Administrative Tools	66
Edit init.bat/init.sh	67
Edit workpoint-client.properties	67
 Chapter 9: Installing Reporting	 69
Installation Status	69
Reporting Architecture	70
Reporting Considerations	71
Hardware Requirements	71
How to Install Reporting	72
Reports Pre-Installation Checklist	72
Reporting Information	74
Open Ports for the Report Server	74
Install the CA Report Server	75
Run the Registry Script	78
Copy the JDBC JAR Files	79
Deploy Default Reports	80
Verify the Reporting Installation	81
Silent Installation	81
How to Uninstall the Report Server	81
Remove Leftover Items	82
 Chapter 10: Configuring Internationalization	 83
Installation Status	83
How to Configure Internationalization	84
Internationalization Prerequisites	84
Configure the SiteMinder Web Agent	85
Create Language-Specific Tasks and Roles	85
Restrictions on the Use of International Character Sets	86

Chapter 11: Reinstalling and Uninstalling Identity Manager **87**

Reinstall Identity Manager	87
Uninstall Identity Manager	87
How to Uninstall Identity Manager	88
Remove Identity Manager Objects with the Management Console	88
Remove the Identity Manager Schema from the Policy Store	88
Remove the Identity Manager schema from a SQL Policy Store	89
Remove the Identity Manager schema from a LDAP Policy Store	89
Uninstall Identity Manager Software Components	90
Remove Identity Manager from WebSphere	91

Chapter 12: Upgrading to Identity Manager r12 **93**

How to Upgrade to Identity Manager r12	93
Upgrade Provisioning Server Components	94
Update the Provisioning Directory Schema	94
Gather Information for Provisioning Server Upgrade	95
Upgrade the Provisioning Server	95
Upgrade Other Provisioning Components	97
Upgrade Connectors	97
Upgrade the Identity Manager Server	98
Configure a Web Agent	98
Upgrade the Application Server	99
Upgrade the Identity Manager Server	101
Export the Directories and Environments	102
Modify the Configuration	103
Recreate the Identity Manager Directory	113
Recreate the Environment	114
Additional New Feature Configuration	115
Install the Identity Manager r12 Bookshelf	116
Unattended Upgrades	117
Identity Manager Server Unattended Upgrade	117
Provisioning Components Unattended Upgrade	118

Appendix A: Unattended Installation **121**

Modify the Configuration File	121
Guidelines for File Modification	121
Configure Installation for Unattended Mode	121
Initial Choices	122
Identity Manager Server	123
Optional Component Configuration	125

Identity Manager Extensions to the Policy Server	126
Configuration File Format	126

Appendix B: Creating a New Database 131

How to Create a New Database Instance	131
Create an MS SQL Server Database Instance	132
Create an Oracle Database Instance	132
Edit the Data Source	133
Run the SQL Scripts	133
Run the CreateDatabase Script for Workflow	134

Appendix C: Enabling XA on MS SQL 2005 137

How to Enable XA on MS SQL 2005	137
Confirm the Distributed Transaction Coordinator is Started	137
Install Stored Procedures for JTA	138
Create a New Registry-Named Value	138
Enable XA Transactions	139

Appendix D: Installation Worksheet 141

Collect Information for an Identity Manager Installation	141
WebSphere Information	141
Provisioning Information	142
Database Information	142
iRecorder Information	143
SiteMinder Information	143
Reporting Information	144

Appendix E: Installation Checklists 145

How to install Prerequisite Components	145
How to Install Identity Manager Components	146
How to Start Identity Manager	146
How to Protect Identity Manager with SiteMinder	147
How to Configure Provisioning	147
How to Configure Email Notification	148
How to Configure Workflow	148
How to Install Reporting	148
How to Configure Internationalization	149
How to Uninstall Identity Manager	149

Appendix F: Changing the WorkPoint RMI Port	151
--	------------

Index	153
--------------	------------

Chapter 1: Installation Overview

This guide provides instructions for installing Identity Manager and also includes information on optional components for installation such as provisioning and SiteMinder.

This section contains the following topics:

[Sample Identity Manager Installations](#) (see page 11)

[Installation Process](#) (see page 17)


[Installation Worksheet](#) (see page 17)

Sample Identity Manager Installations

Based on the functionality you want to implement, you can choose which components of Identity Manager you want to install in your environment. The following section illustrates some examples of Identity Manager implementations at a high level.

Basic Installation

In all Identity Manager installations, the Identity Manager Server is installed on an application server. After you install the application server, you use the Identity Manager Installer to install all the software on the same system. The following figure is an example of a basic Identity Manager installation:

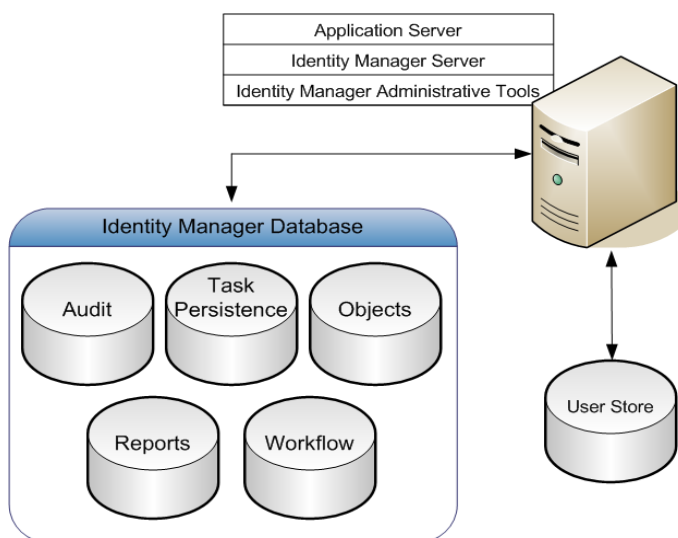

Identity Manager Server

Executes tasks within Identity Manager. The J2EE Identity Manager application includes the Management Console (configuring environments), and the User Console (managing an environment). With the Identity Manager Server, you can also install Identity Manager iRecorder, which you use for auditing tasks.

Identity Manager Administrative Tools

Provides tools and samples for configuring and using Identity Manager. The tools include configuration files, scripts, utilities, and jar files that you use to compile custom objects with Identity Manager APIs and API samples. The Provisioning Manager and WorkPoint Designer are also included with the Administrative Tools. Administrative Tools are placed in the following locations:

- **Windows:** C:\Program Files\CA\IAM Suite\Identity Manager\tools
- **UNIX:** HOME/CA/IAM_Suite/Identity_Manager/tools

Identity Manager Database

Stores data for Identity Manager. This database stores information for auditing, task persistence, reporting, workflow, and Identity Manager objects. This must be a relational database.

Note: For a complete list of supported relational databases, see the Identity Manager Support Matrix on the Identity Manager support site <http://ca.com/support>.

Identity Manager User Store


Contains users and their information. This store can be a pre-existing user store already in use by the company. This can be LDAP or a relational database.

Note: For more information on setting up a user store for Identity Manager, see the *Configuration Guide*.

Installation with Provisioning Components

Identity Manager provisioning allows you to create an Environment that connects to a Provisioning Server for provisioning accounts to various endpoint systems. You can assign provisioning roles to users you create through Identity Manager. Provisioning roles are roles with account templates that define accounts that users can receive on endpoint systems. Accounts provide users with access to additional resources, such as an email account.

When you assign a provisioning role to a user, that user receives the accounts defined by the account templates in the role. The account templates also define how user attributes are mapped to accounts. The accounts exist in managed endpoints defined by the account templates. The following figure is an example of an Identity Manager installation with provisioning:

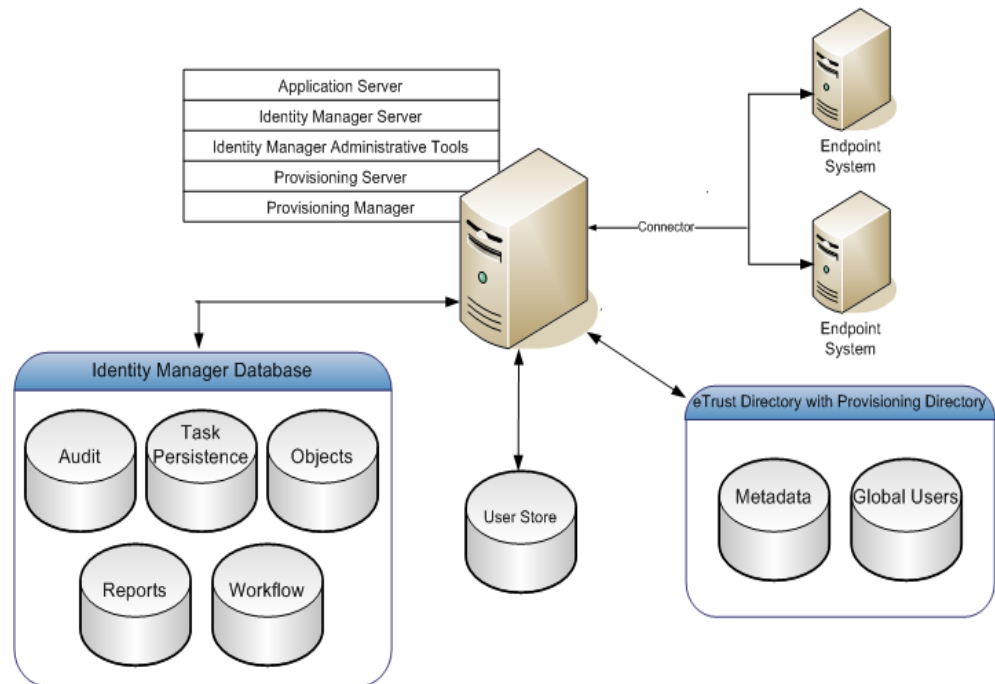

Identity Manager Server

Executes tasks within Identity Manager. The J2EE Identity Manager application includes the Management Console (configuring environments), and the User Console (managing an environment). With the Identity Manager Server, you can also install Identity Manager iRecorder, which you use for auditing tasks.

Identity Manager Administrative Tools

Provides tools and samples for configuring and using Identity Manager. The tools include configuration files, scripts, utilities, and jar files that you use to compile custom objects with Identity Manager APIs and API samples. The Provisioning Manager and WorkPoint Designer are also included with the Administrative Tools. Administrative Tools are placed in the following locations:

- **Windows:** C:\Program Files\CA\IAM Suite\Identity Manager\tools
- **UNIX:** HOME/CA/IAM_Suite/Identity_Manager/tools

Identity Manager Database

Stores data for Identity Manager. This database stores information for auditing, task persistence, reporting, workflow, and Identity Manager objects. This must be a relational database.

Note: For a complete list of supported relational databases, see the Identity Manager Support Matrix on the Identity Manager support site <http://ca.com/support>.

Identity Manager User Store

Contains users and their information. This store can be a pre-existing user store already in use by the company. This can be LDAP or a relational database.

Note: For more information on setting up a user store for Identity Manager, see the *Configuration Guide*.

Identity Manager Provisioning Server

Manages accounts on endpoint systems.

Note: Before installing the Provisioning Server, install eTrust Directory on a separate system and run the Provisioning Directory Initialization on the eTrust Directory system.

Identity Manager Provisioning Directory Initialization

Specifies the directory schema to eTrust Directory. This schema sets up the Directory System Agents (DSAs) within eTrust Directory.

Note: eTrust Directory is a prerequisite to running the Provisioning Directory Initialization.


Identity Manager Provisioning Manager

Manages the Provisioning Server through a graphical interface. This is used for administrative tasks such as acquiring endpoints, installing endpoint types, and managing provisioning server options. The Provisioning Manager is installed as part of the Identity Manager Administrative Tools.

Note: This application runs on Windows only.

Installation with SiteMinder Policy Server

A SiteMinder Policy Server provides advanced authentication and protection for your Environment. The following figure is an example of an Identity Manager installation with a SiteMinder Policy Server:

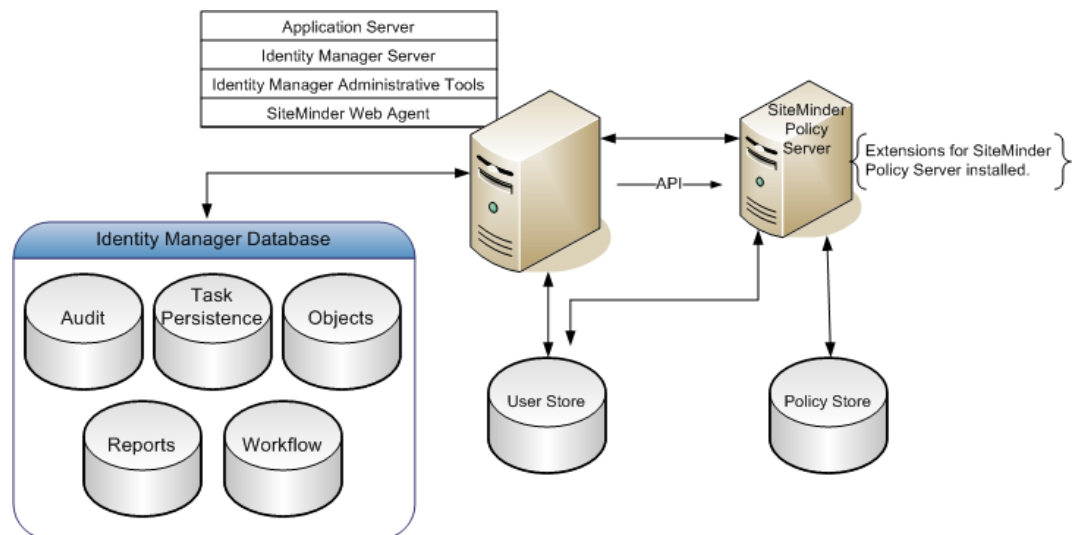

Identity Manager Server

Executes tasks within Identity Manager. The J2EE Identity Manager application includes the Management Console (configuring environments), and the User Console (managing an environment). With the Identity Manager Server, you can also install Identity Manager iRecorder, which you use for auditing tasks.

Identity Manager Administrative Tools

Provides tools and samples for configuring and using Identity Manager. The tools include configuration files, scripts, utilities, and jar files that you use to compile custom objects with Identity Manager APIs and API samples. The Provisioning Manager and WorkPoint Designer are also included with the Administrative Tools. Administrative Tools are placed in the following locations:

- **Windows:** C:\Program Files\CA\IAM Suite\Identity Manager\tools
- **UNIX:** HOME/CA/IAM_Suite/Identity_Manager/tools

Identity Manager Database

Stores data for Identity Manager. This database stores information for auditing, task persistence, reporting, workflow, and Identity Manager objects. This must be a relational database.

Note: For a complete list of supported relational databases, see the Identity Manager Support Matrix on the Identity Manager support site <http://ca.com/support>.

Identity Manager User Store

Contains users and their information. This store can be a pre-existing user store already in use by the company. This can be LDAP or a relational database.

Note: For more information on setting up a user store for Identity Manager, see the *Configuration Guide*.

SiteMinder Web Agent

Works with the SiteMinder Policy Server to protect the User Console. Installed on the system with the Identity Manager Server.

SiteMinder Policy Server

Provides advanced authentication and authorization for Identity Manager, as well as other facilities such as Password Services, Single Sign-On, and so forth.

Extensions for SiteMinder Policy Server

Enables a SiteMinder Policy Server to support Identity Manager. Install the extensions on each SiteMinder Policy Server system in your Identity Manager implementation.

Installation Process

To install Identity Manager, perform the following steps:

1. Install the prerequisite hardware and software.
2. Install the Identity Manager components.
3. Starting Identity Manager.
4. (Optional) Protect Identity Manager with SiteMinder.
5. (Optional) Configure provisioning.
6. (Optional) Configure email notification.
7. (Optional) Configure workflow.
8. (Optional) Install reporting.
9. (Optional) Configure internationalization.

Note: In this document, each chapter includes a checklist of the steps to install or configure an Identity Manager feature or component. It is the section that begins with a How To title in each chapter. The appendix **Installation Checklists** includes all checklists. You may want to print this appendix before you begin the installation.

Installation Worksheet

During Identity Manager installation, you are prompted for the location of software, administrator account names, and other information. To simplify the installation process, see the appendix **Installation Worksheet** to have answers ready for these questions.

Chapter 2: Identity Manager Prerequisites

This section contains the following topics:

[Installation Status](#) (see page 19)

[Prerequisite Knowledge](#) (see page 20)

[How to install Prerequisite Components](#) (see page 20)

[Hardware Requirements](#) (see page 21)

[Software Requirements](#) (see page 21)

[Create a Database](#) (see page 22)

[WebSphere Application Server](#) (see page 23)

Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
X	1. Install prerequisite hardware and software.
	2. Install Identity Manager components.
	3. Start Identity Manager.
	4. (Optional) Protect Identity Manager with SiteMinder.
	5. (Optional) Configure provisioning.
	6. (Optional) Configure email notification.
	7. (Optional) Configure workflow.
	8. (Optional) Install reporting.
	9. (Optional) Configure internationalization.

Prerequisite Knowledge

This guide is intended for users who are familiar with Java, J2EE standards, or application server technology. It assumes that you have the following technical knowledge:

- An understanding of J2EE application servers and multi-tier architecture
- Experience with managing the application server, including tasks such as starting the application server
- Experience with managing a relational database
- (Optional) Familiarity with SiteMinder concepts, terms, and Policy Server configuration tasks

How to install Prerequisite Components

To install the prerequisite hardware and software for Identity Manager:

✓	Step
	1. Confirm that the system that will host Identity Manager satisfies the hardware requirements.
	2. Review the software prerequisites for Identity Manager.
	3. Create a database for Identity Manager.
	4. Confirm that the application server that will host Identity Manager is installed and configured correctly.

Hardware Requirements

The following minimum hardware is required for the system that will host the Identity Manager Server:

- CPU: Single or dual-processor, Intel Pentium III (or compatible) 700-900 MHz, or Sparc Workstation 440MHz
- Memory: 2 GB
- Available disk space: 1 GB

Note: These hardware requirements take into account the requirements of the application server that must be installed on the system where you install the Identity Manager Server.

Software Requirements

Before you install Identity Manager, do the following:

1. Install the application server on the system where you plan to install the Identity Manager Server.
2. Install a supported Java Development Kit (JDK) or Java Runtime Environment (JRE) for Identity Manager on the application server system.

Note: For a complete list of supported platforms and versions, see the Identity Manager Support Matrix on the Identity Manager support site <http://ca.com/support>.

3. If you plan to enable provisioning, run the Provisioning Directory Initialization on the system with eTrust Directory installed. eTrust Directory is a prerequisite to running the Provisioning Directory Initialization.

Important! For a production environment, install eTrust Directory on a separate system from the Identity Manager Server.

4. If you plan to use SiteMinder to protect Identity Manager, install the SiteMinder Policy Server and download the SiteMinder bookshelf.
5. Install Security Command Center if you have purchased it and plan to install Identity Manager iRecorder.

Access the Identity Manager Support Matrix

For a complete list of supported software versions, see the Identity Manager support matrix.

To locate the support matrix

1. Log into support.ca.com.
2. Click Support By Product or Solution.
3. Select CA Identity Manager in the Products section under Select a Product or Solution page.

The CA Identity Manager page opens.

4. Scroll to Recommend Readings.
5. Click CA Identity Manager Informational Documentation Index.

A page displays platform support matrices for supported versions of Identity Manager.

Create a Database

Create a database for Identity Manager. This database will be used to store objects and data for auditing, reports, workflow, and task persistence. For more information, see the appendix on **Creating a New Database**.

Create a user account for the database. This user must have administrative rights to the database.

When you run the Identity Manager installer, provide the database information when prompted, and all the database schemas will be created automatically.

WebSphere Application Server

When using WebSphere as the Identity Manager application server, note the following:

- The Identity Manager Server is a J2EE application that must be deployed on a supported application server.
- Identity Manager Server must be the only application deployed on the application server.
- If you are installing Identity Manager on a Solaris system, run the installation as root.
- If you are using WebSphere with MS SQL 2005, [enable XA transactions](#) (see page 137) on MS SQL 2005. Identity Manager needs an XA data source for the database transactions to work properly.
- When using WebSphere on Windows, ensure that your Admin username is less than 12 characters long. If you have a username that is 12 characters or greater, Identity Manager will not work. For example, the username "Administrator" is greater than 12 characters and will cause Identity Manager to fail.

Install a WebSphere Application Server

To use IBM WebSphere as the application server for Identity Manager, install the WebSphere server as described in IBM's documentation.

Note: For a complete list of supported platforms and versions, see the Identity Manager Support Matrix on the Identity Manager support site <http://ca.com/support>.

When installing the WebSphere server, select the following components during the installation:

- The appropriate plug-in for your Web Server.

- WebSphere 6.0 uses default messaging, which is installed with the WebSphere server.
- For all WebSphere versions, be sure to select the Server and Client option during the installation.

Note: For Solaris systems, be sure to configure the groups mqm and mqbrkrs, and the users mqm and root, as described in IBM's installation documentation before you install the Embedded Messaging service.

Important! We recommend that you disable security at profile creation. For example, create a WebSphere 6.1 profile with the Security Enabled option unchecked.

Verify the WebSphere Application Server

Use the following tests to verify that WebSphere is working:

- Test whether the WebSphere application server is installed correctly by accessing IBM's snoop utility at the following URL:
`http://hostname:port/snoop`

For example:

`http://MyServer.MyCompany.com:9080/snoop`

If WebSphere is installed correctly, the Snoop Servlet—Request Client Information page is displayed in the browser.

- Test whether the WebSphere application server plug-in is installed correctly by accessing IBM's snoop utility without including the application server port in the URL:
`http://hostname/snoop`

For example:

`http://MyServer.MyCompany.com/snoop`

If WebSphere is installed correctly, the same Snoop Servlet—Request Client Information page is displayed in the browser.

For additional help with WebSphere, contact IBM customer support.

Important! Before you install the Identity Manager server, ensure that you perform the necessary [prerequisite steps](#) (see page 101) on WebSphere.

Chapter 3: Installing Identity Manager Components

This section contains the following topics:

- [Installation Status](#) (see page 25)
- [Identity Manager Components](#) (see page 26)
- [How to Install Identity Manager Components](#) (see page 26)
- [Gather Information for the Installation](#) (see page 26)
- [Check for Identity Manager Cumulative Releases](#) (see page 30)
- [Important Notes for Installation](#) (see page 30)
- [Install Identity Manager Components](#) (see page 32)
- [Install Additional Components](#) (see page 35)
- [Install the Identity Manager Bookshelf](#) (see page 36)

Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
	1. Install prerequisite hardware and software.
X	2. Install Identity Manager components.
	3. Start Identity Manager.
	4. (Optional) Protect Identity Manager with SiteMinder.
	5. (Optional) Configure provisioning.
	6. (Optional) Configure email notification.
	7. (Optional) Configure workflow.
	8. (Optional) Install reporting.
	9. (Optional) Configure internationalization.

Identity Manager Components

The Identity Manager installation components include the following:

- Identity Manager Server
- Identity Manager Administrative Tools
- Identity Manager Provisioning Server
- Identity Manager Provisioning Directory Initialization
- Identity Manager Extensions for SiteMinder

How to Install Identity Manager Components

Use the following checklist to install the components of Identity Manager:

✓	Step
	1. Gather information needed for the installation program.
	2. Check if any Identity Manager Cumulative Releases exist.
	3. Review important notes prior to the Identity Manager installation.
	4. Install the Identity Manager components.
	5. Install the Identity Manager Bookshelf.

Important! If you are going to use SiteMinder, see the chapter on Protecting Identity Manager with SiteMinder and follow the steps to configure SiteMinder to work with Identity Manager.

Gather Information for the Installation

The Identity Manager installation program asks you for information about previously installed software and the software that you are installing.

Note: Use the **Installation Worksheet** to record this information. We recommend that you complete the worksheet before starting the installation.

WebSphere Information

Record the following WebSphere information you need during the Identity Manager installation:

Field Name	Description	Your Response
WebSphere Install Folder	The location of the application server home directory.	
Server Name	The name of the system on which the application server is running.	
Profile Name	The name of the profile you want to use for Identity Manager.	
Cell Name	The name of the cell in which the application server is located.	
Node Name	The name of the node in which the application server is located.	
Cluster Name	The cluster name for high-availability implementations. This is only needed if you plan on installing Identity Manager in a clustered environment. Note: For more information on clustering, see the <i>High Availability Guide</i>.	
App Server URL and port	The application URL and port number of the system that will host the Identity Manager Server (system that will host the application server).	

Provisioning Information

Record the following Provisioning Directory information you need during the Identity Manager installation:

Field Name	Description	Your Response
Host	The hostname of the remote Provisioning Directory system.	
Port	The port number of a remote Provisioning Directory system.	
User Password	The remote Provisioning Directory user password.	
Domain Name	The domain name for the Provisioning Directory. This is required for both local and remote Provisioning Directory installations. Default: IDENTITY_MANAGER Note: You should not change the domain unless you are connecting to an existing domain.	

Database Information

Record the following database information you need during the Identity Manager installation:

Field Name	Description	Your Response
Database Type	The database type (vendor/version) of the database created for task persistence, workflow, audit, reporting, and object storage.	

Field Name	Description	Your Response
Host Name	The hostname of the system where the database is located. Note: Ensure you provide a hostname and <i>not</i> an IP address.	
Port Number	The port number of the database.	
SID/Database Name	The database identifier.	
Username	The username for database access. Note: This user must have administrative rights to the database.	
Password	The password for the user account with administrative rights.	

iRecorder Information

Record the following iRecorder information you need during the Identity Manager installation:

Field Name	Description	Your Response
Host name or IP of Audit Client or iRouter	The hostname or IP address of the iRouter used by CA Security Command Center or CA Audit.	

SiteMinder Information

Record the following SiteMinder Policy Server information you need during the Identity Manager installation:

Field Name	Description	Your Response
Policy Server Host Name	The hostname of the SiteMinder Policy Server.	

Field Name	Description	Your Response
SiteMinder Administrator Name	The administrator username for the SiteMinder Policy Server.	
SiteMinder Administrator Password	The administrator user password for the SiteMinder Policy Server.	
SiteMinder Folder (Solaris Only)	The location of SiteMinder on the system with a SiteMinder Policy Server installed.	

Important! When installing Identity Manager with SiteMinder, the installation does not prompt the user for the Web Agent name. Instead, the installer refers to the generic username as the agent name and the generic password as the agent shared secret. To connect to an existing SiteMinder deployment with set agent credentials, edit the ra.xml file under the "IdentityMinder.ear\policyserver.rar\META-INF" folder and set the AgentName and AgentSecret properties to the correct values.

Check for Identity Manager Cumulative Releases

Check for the latest Identity Manager Cumulative Release (CR) at the Identity Manager support site. If you find a CR release for Identity Manager r12, use the Identity Manager CR installer to install or to upgrade an existing r12 installation with the latest fixes and enhancements.

To check for Identity Manager Cumulative Releases

1. In a web browser, go to the Identity Manager support site <http://ca.com/support>.
2. Login with your username and password.
3. Under Support by Product, select CA Identity Manager.
4. If a Cumulative Release (CR) exists, download it.
5. Use the instructions in this chapter to install the Identity Manager components on one system or several systems.

Important Notes for Installation

Before installing an Identity Manager component, note the following:

- Install the Identity Manager Server on the system where you installed the application server.
- If you are installing on a Solaris system, all the installer executables must have the appropriate permissions. To do this, execute the following command:
`chmod -R a+x install_directory`
- If you are installing the Provisioning Server on a Windows system, log in as a Local Administrator.
- If you are installing the Provisioning Server on a Solaris system, run the installer as root.
- If you are installing the iRecorder with the Identity Manager Server on a Solaris system, run the installer as root.
- If you want to use a SiteMinder Policy Server to protect Identity Manager, install the Identity Manager Extensions for Policy Server on each Policy Server in your Identity Manager deployment. Also, ensure that you configure the policy store for Identity Manager.

Note: For more information on how to configure SiteMinder to work with Identity Manager, see the section on Protecting Identity Manager with SiteMinder.

- If you need the Provisioning Manager to be installed, install the Administrative Tools on a Windows system.
- If you want to enable provisioning in Identity Manager, run the Provisioning Directory Initialization on the system where eTrust Directory is installed. eTrust Directory is a prerequisite for enabling provisioning in Identity Manager.

Important! For a production environment, install eTrust Directory on a separate system from the Identity Manager Server. This can be done by running the Identity Manager installer on the remote machine.

- If you want to use the Identity Manager workflow feature or the Identity Manager export utility, ensure that JDK 1.4.2_13 or higher is installed on the system where you are installing the Administrative Tools.
- If you are running the Identity Manager installer on an IPv6 system, ensure that you provide hostnames (and not IP addresses) in the installer screens.

Installation Log Files

If you encounter any issues while performing an Identity Manager installation, please refer to the following install log locations for more information.

The Identity Manager Server installer logs are written to the follow location:

C:\Program Files\CA\CA Identity Manager\install_config_info

The Provisioning Server installer logs are written to the following location:

user_path\etaserver_install.log

Example:

C:\Documents and Settings\user\Local Settings\Temp\etaserver_install.log

Install Identity Manager Components

Run the Identity Manager installation program on each server in your deployment to install the appropriate component. Choose the option to install one or more of the following components:

- Identity Manager Server
- Identity Manager Administrative Tools—These tools include the Provisioning Manager which can only run in a Windows environment.
- Identity Manager Provisioning Server—If you want to enable provisioning within Identity Manager, install the Provisioning Server. Install the Provisioning Server on the same system as the Identity Manager Server or a separate system.
- Identity Manager Provisioning Directory Initialization—This should be run on the system where eTrust Directory is installed. eTrust Directory is a prerequisite for enabling provisioning in Identity Manager.

- Identity Manager extensions to the Policy Server—If you are using SiteMinder Policy Server to protect Identity Manager, install these extensions. Install these extensions on the same system as the Policy Server.

The Identity Manager installer also allows you to configure the following options during installation:

iRecorder

The iRecorder sends Identity Manager events to CA Audit. Once in CA Audit, the events can be monitored by CA Audit or CA Security Command Center (SCC). For more information about the iRecorder, see the iRecorder Reference Guide for CA Identity Manager, which is available in the Identity Manager Bookshelf.

Connection to a remote Provisioning Directory

If you have already installed a Provisioning Directory on another system, as recommended, this option allows you to connect the Identity Manager Server to that system.

FIPS 140-2

All components in an Identity Manager environment need to be FIPS 140-2 enabled in order for Identity Manager to support FIPS 140-2. You will need a FIPS encryption key to enable FIPS 140-2 during installation. A Password Tool for providing a FIPS key is located in the following directory:

C:\Program Files\CA\IAM Suite\Identity Manager\tools\PasswordTool

Important! Use the same FIPS 140-2 encryption key in all installations and ensure that you safeguard the key file once generated by the Password Tool.

Production Environments

Important! For a production environment, keep all data systems and server systems separate. For example, eTrust Directory and a database (SQL or Oracle) should be on a separate system than the Identity Manager Server and the Provisioning Server.

To install Identity Manager components in a production environment

1. Complete the steps that apply to your installation:
 - If you are installing the Identity Manager Server, stop the application server.
 - If you are installing only the Administrative Tools and you want to use Identity Manager's WorkPoint workflow feature, skip to Step 2.
 - If you are installing Identity Manager Extensions for the Policy Server, stop the SiteMinder services.
 - If you are running the Provisioning Directory Initialization, ensure that eTrust Directory is already installed on the system.
2. Do one of the following:
 - **Windows:** From your installation media, run the following program:
`\win32\ca-im-12.0-win32.exe`
 - **UNIX:** From your installation media, run the following program:
`/solaris/ca-im-12.0-sol.bin`

The Identity Manager installer opens.
3. Complete the instructions in the Identity Manager installation dialog boxes.
When prompted, select the components to install.
4. Check that you can ping the systems that host the Policy Server and other Identity Manager components from the system with the Identity Manager Server.
5. To continue with the installation, proceed to Install the Identity Manager Bookshelf.

Demonstration Environments

You may decide to install all the components of your Identity Manager deployment on a single system. If so, use the Identity Manager installation program to quickly install all software components of Identity Manager on the same system.

Important! Installing *all* Identity Manager components on one system is recommended for demonstration environments *only*.

To install all Identity Manager software on a single system

1. Stop the application server.
2. Run the Identity Manager installer:
 - **Windows:** From your installation media, run the following program:
`\win32\ca-im-12.0-win32.exe`
 - **UNIX:** From your installation media, run the following program:
`/solaris/ca-im-12.0-sol.bin`

The Identity Manager installer opens.

3. Check all of the following components to install on a single system:
 - Identity Manager Server
 - Identity Manager Administrative Tools
 - Note:** Provisioning Manager will only be installed if the system is Windows.
 - Identity Manager Provisioning Server
 - Identity Manager Provisioning Directory Initialization
 - Note:** eTrust Directory must already be installed on the system.
 - Identity Manager Extensions to the Policy Server
4. Complete the instructions in the Identity Manager installer dialog boxes.

To continue with the installation, proceed to Install the Identity Manager Bookshelf.

Install Additional Components

If you installed a subset of the Identity Manager components, you may want to install additional components at a later date.

To install additional components

1. Stop the application server.
2. Do one of the following:
 - **Windows:** From your installation media, run the following program:
`\win32\ca-im-12.0-win32.exe`
 - **UNIX:** From your installation media, run the following program:
`/solaris/ca-im-12.0-sol.bin`The Identity Manager installer opens.
3. To install one or more of the following components, select it and continue with the installation:
 - Identity Manager Server
 - Identity Manager Administrative Tools
 - Identity Manager Provisioning Server
 - Identity Manager Provisioning Directory Initialization
 - Identity Manager Extensions for SiteMinder Policy Server

Note: If a component is already installed, Identity Manager will update that component if it is selected. To prevent Identity Manager from updating the component, clear it before continuing.
4. Complete the instructions in the Identity Manager installation dialog boxes.
5. To install or configure a connection to the Provisioning Directory or the iRecorder, complete one of the following steps:
 - If the Identity Manager Server is not installed, select the Identity Manager Server component and the additional components to install, and continue with the installation.
 - If the Identity Manager Server is installed, select just the additional components to install, and continue with the installation.

Install the Identity Manager Bookshelf

For complete information about this product, install the Identity Manager Bookshelf, so that you can do the following:

- Use a single console to view documents published for Identity Manager (including Provisioning).
- Use a single alphabetical index to find a topic in any document.
- Search all documents for one or more words.

To use the Bookshelf

1. Extract the contents of the ZIP file.
2. Choose one of the following methods:
 - Open the Bookshelf.hta file if the bookshelf is on the local system and you are using Internet Explorer.
 - Open the Bookshelf.html file if the bookshelf is on a remote system or if you are using Mozilla Firefox.

Note: The Identity Manager Bookshelf includes the release notes for this product. The release notes may contain additional installation and configuration information that was issued after publication of this guide.

Chapter 4: Starting Identity Manager

This section contains the following topics:

[Installation Status](#) (see page 37)

[How to Start Identity Manager](#) (see page 38)

[Start the Identity Manager Server](#) (see page 38)

[Verify that Identity Manager Started](#) (see page 39)

[Advanced Configuration](#) (see page 39)

Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
	1. Install prerequisite hardware and software.
	2. Install Identity Manager components.
X	3. Start Identity Manager.
	4. (Optional) Protect Identity Manager with SiteMinder.
	5. (Optional) Configure provisioning.
	6. (Optional) Configure email notification.
	7. (Optional) Configure workflow.
	8. (Optional) Install reporting.
	9. (Optional) Configure internationalization.

How to Start Identity Manager

After you install the Identity Manager software components, perform the following steps to start the Identity Manager Server for the first time:

Step
1. Start the Identity Manager Server.
2. Confirm that Identity Manager started correctly.

Start the Identity Manager Server

To start Identity Manager Server on WebSphere

1. Start Identity Manager as follows:

- **Windows:**

Navigate to Start, Programs, IBM WebSphere, Application Server 6.x, Profiles, *Profile_Type*, Start the Server

Note: To view status information, use the First Steps console, which you access from the same location as the Start the Server command mentioned above. In the First Steps console, select Start the Server.

- **UNIX:**

- a. Navigate to *websphere_home/bin* from the command line.
- b. Enter the following command:

```
startserver websphere_server
```

When you see a message that resembles the following, the server has completed its startup process:

Server server1 is open for e-business

Verify that Identity Manager Started

To verify that the Identity Manager Server has started successfully, you can access the Management Console.

Confirm the following:

- You can access the following URL from a browser:
`http://im_fqdn:port/idmmanage`

For example:

`http://MyServer.MyCompany.com:port-number/idmmanage`

- The Management Console opens.
- No errors are displayed in the application server log.
- You do not receive an error message when you click the Directories link.

Note: For details about the Management Console, see the *Configuration Guide*.

Advanced Configuration

You can now use the Management Console to do the following post-installation configurations:

- Deploy an Identity Manager Directory
- Configure an Identity Manager Environment

Note: For more information, see the *Configuration Guide*.

The remainder of this guide discusses optional features including the following:

- Protecting Identity Manager using a SiteMinder Policy Server
- Configuring provisioning
- Configuring email notification
- Configuring workflow
- Installing reporting
- Installing support for internationalization
- Reinstalling or removing Identity Manager

- Upgrading to Identity Manager r12 from previous versions of Identity Manager
- Creating unattended Identity Manager installations

Chapter 5: Protecting Identity Manager with SiteMinder

This section contains the following topics:

[Installation Status](#) (see page 41)

[How Resources are Protected](#) (see page 42)

[How to Protect Identity Manager with SiteMinder](#) (see page 42)

[Install the SiteMinder Web Agent](#) (see page 43)

[Install the Proxy Plug-In](#) (see page 45)

[Verify the Web Agent and Connector](#) (see page 46)

[Configure the Policy Store for Identity Manager](#) (see page 47)

Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
	1. Install prerequisite hardware and software.
	2. Install Identity Manager components.
	3. Start Identity Manager.
X	4. (Optional) Protect Identity Manager with SiteMinder.
	5. (Optional) Configure provisioning.
	6. (Optional) Configure email notification.
	7. (Optional) Configure workflow.
	8. (Optional) Install reporting.
	9. (Optional) Configure internationalization.

How Resources are Protected

Advanced authentication requires you to use a SiteMinder Policy Server in your implementation.

In many situations, the application server hosting the Identity Manager Server is on a separate system from the one with the Web Server that proxies requests to the application server. To provide forwarding services, the Web Server needs the following:

- A plug-in that is provided by the application server vendor
- A SiteMinder agent to protect the Identity Manager resources, such as the User Console, Self Registration, and the Forgotten Password feature

The Web Agent controls the access of users who request Identity Manager resources. After authenticating and authorizing users, the Web Agent allows the Web Server to process the requests.

When the Web Server receives the request, the application server plug-in forwards it to the application server hosting the Identity Manager Server.

The Web Agent facilitates communication between the Identity Manager Server and the Policy Server and protects Identity Manager resources that are exposed to users and administrators.

How to Protect Identity Manager with SiteMinder

The following table describes the steps involved in protecting Identity Manager resources:

 Step
1. Install and configure a SiteMinder Agent to protect Identity Manager resources.
2. Install the plug-in the Web Server uses to forward requests to the application server.
3. Verify that the plug-in is successfully forwarding requests to the application server.

**Step**

4. Configure the SiteMinder Policy Store for use with Identity Manager.

Install the SiteMinder Web Agent

You can use a SiteMinder Web Agent or a Web Agent Group to protect Identity Manager resources. For supported Web Agent versions, see the Identity Manager Platform Support Matrix on the Identity Manager support site <http://ca.com/support>.

Note: For more information about Web Agent groups, see the *CA SiteMinder Web Access Manager Policy Server Configuration Guide*.

Before installing the Web Agent, ensure the following requirements have been met:

- The SiteMinder Policy Server is installed and configured.
- The system that will host the Web Agent has network access to the Policy Server.
- The Web Server that will host the Web Agent is running.

The following table lists the steps to install and configure a SiteMinder Web Agent:

	Step	Refer to...
	1. Install and configure the Web Agent.	<i>CA SiteMinder Web Access Manager Web Agent Installation Guide</i>
	2. If you installed the Web Agent on an IIS Web Server, be sure to set the DefaultAgentName and DefaultPassword parameters of your Agent Configuration Object.	<i>CA SiteMinder Web Access Manager Web Agent Installation Guide</i>

✓	Step	Refer to...
	3. Enable the Web Agent.	<i>CA SiteMinder Web Access Manager Web Agent Installation Guide</i>
	4. If you are using an IIS web server, ensure the SiteMinder web agent ISAPI filter appears before any other filter, including the SePlugin filter, in the IIS console.	IIS documentation

To use the SiteMinder Web Agent to protect Identity Manager, select the Web Agent when you create an Environment. For instructions, see the *Configuration Guide*.

Note: You do not need to create any additional objects in SiteMinder to use the SiteMinder Web Agent.

To verify the Web Agent, confirm the following:

- The SiteMinder Policy Server Authentication and Authorization logs verify that the Web Agent starts properly.
- The Agent log for the Web Agent verifies that the Web Agent starts properly.

Install the Proxy Plug-In

Once the Web Agent authenticates and authorizes a request for an Identity Manager resource, the Web Server on which you installed the Web Agent must forward the request to the application server that hosts the Identity Manager Server. This is accomplished through a Web Server proxy plug-in provided by the application server vendor.

After you install the Identity Manager components and deploy the IdentityMinder EAR, you update the plug-in using WebSphere's GenPluginCfg command.

To install the proxy plug-in

1. Install the proxy plug-in from the WebSphere Launch Pad.
2. Add the Web Server to the WebSphere cell by running the `configurewebserver1.bat` command as follows:
 - a. Edit `websphere_home\Plugins\bin\configurewebserver1.bat`,sh in a text editor.
 - b. Add a user name and password to after `wsadmin.bat/.sh` as follows:
`wsadmin.bat -user wsadmin -password password -f
configureWebserverDefinition.jacl`
 - c. Run `configurewebserver1.bat/.sh`.

Note: See the IBM WebSphere documentation for more information about the `configurewebserver` command.

3. From the command line, navigate to `websphere_home\bin`, where `websphere_home` is the installed location of WebSphere.

For example:

■ **Windows:**

`C:\Program Files\WebSphere\AppServer\bin\`

■ **UNIX:**

`/home_dir/WebSphere/AppServer/bin`

4. Run the `GenPluginCfg.bat` or `GenPluginCfg.sh` command.

Running this command generates a `plugin-cfg.xml` file in `websphere_home\Plugins\config\webserver1\config\cells`.

5. If the application server is on a separate system from the one with the Web server, copy the plugin-cfg.xml to the following directory on the system where you installed the proxy plug-in:
*websphere_home\AppServer\profiles\server_name\config\cells\cell_name\nodes\we
bserver1_node\servers\webserver1*
6. Restart the Web server to activate the plug-in as follows:
 - IIS Web Servers: In the master WWW service, ensure that the WebSphere plug-in (sePlugin) appears after the SiteMinder Web Agent plug-in and that the WebSphere plug-in started successfully.
 - iPlanet Web Servers: Ensure that the WebSphere plug-in (libns41_http.so) is loaded after the SiteMinder Web Agent plug-in (NSAPIWebAgent.so)

For iPlanet 6.0 Web Servers, check the order of plug-ins in *iplanet_home/https-instance/config/magnus.conf*.

For iPlanet 5.x Web Servers, copy the following lines from *iplanet_home/https-instance/config/magnus.conf* to *iplanet_home/https-instance/config/obj.conf*

Init fn="load-modules" funcs="as_init,as_handler,as_term"
shlib="/export/WebSphere/AppServer/bin/libns41_http.so"

Init fn="as_init"
bootstrap.properties="/export/WebSphere/AppServer/config/cells/plug
in-cfg.xml"

Add the following after AuthTrans fn="SiteMinderAgent" in the obj.conf file:

Service fn="as_handler"
 - Apache Web Servers: In the Dynamic Shared Object (DSO) Support section of *Apache_home/config/httpd.conf*, be sure that the SiteMinder Web Agent plug-in (mod2_sm.so) is loaded before the WebSphere plug-in (mod_ibm_app_server_http.so).

Verify the Web Agent and Connector

The Identity Manager Server installation contains a JSP page that you can use to verify that the application server connector is successfully forwarding requests to the application server.

In a browser, enter the following URL:
`http://web_server_hostname/idm/ui/ping.jsp`

For example:
`http://MyServer.MyCompany.com/idm/ui/ping.jsp`

If your application server connector is functioning, you will receive a JSP page with an initial heading of Request Information. This page provides details about the processing of the request for the JSP page.

If the Web Agent you created is functioning correctly, information similar to the following will appear under Request Headers in the page displayed in your browser:

```
SM_AUTHTYPE = Not Protected
SM_DOMAIN = your_domain
SMTRANSACTIONID = some_system-generated_id
```

For example:

```
SM_AUTHTYPE = Not Protected
SM_DOMAIN = .MyCompany.com
SMTRANSACTIONID = 41041aac-04ec-3edbc669-0a70-012d19d9
```

Configure the Policy Store for Identity Manager

Once you install the Identity Manager Extensions for SiteMinder on the system with the Policy Store, extend the policy store schema for Identity Manager.

To extend the schema to the policy store, use the Identity Manager Administrative Tools. Install the tools using the Identity Manager installation program, without installing the Identity Manager server.

Configure a Relational Database

To configure a relational database policy store

1. Configure the directory as a supported SiteMinder Policy Store.

Note: Be sure that SiteMinder is pointing to this policy store. For configuration instructions, see the *CA SiteMinder Web Access Manager Policy Server Installation Guide*.

2. Run one of the following scripts for Identity Manager on the Policy Store database:

- **SQL:** C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-schemas\MicrosoftSQLServer\ims8_mssql_ps.sql
- **Oracle:** HOME/CA/IAM_Suite/Identity_Manager/tools/policystore-schemas/OracleRDBMS/ims8_oracle_ps.sql

Configure Sun Java Systems Directory Server or IBM Directory Server

To configure a Sun Java Systems Directory or IBM Directory policy store

1. Configure the directory as a supported SiteMinder Policy Store.

Note: Be sure that SiteMinder is pointing to this policy store. For configuration instructions, see the *CA SiteMinder Web Access Manager Policy Server Installation Guide*.

2. Add the appropriate LDIF schema file from the following table to the directory. The LDIF files are located in C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-schemas.

For information on adding schema files, see the following documentation for your directory:

- **IBM Directory Server:**
IBMDirectoryServer\V3.identityminder8
- **Sun Java Systems Directory Server (iPlanet):**
SunJavaSystemDirectoryServer\sundirectory_ims8.ldif

Configure Microsoft Active Directory

To configure a Microsoft Active Directory policy store, you apply the activedirectory_ims8.ldif script.

To configure an Active Directory policy store

1. Configure the directory as a supported SiteMinder Policy Store.

Note: Be sure that SiteMinder is pointing to this policy store. For configuration instructions, see the *CA SiteMinder Web Access Manager Policy Server Installation Guide*.

2. Modify the `activedirectory_ims8.ldif` schema file as follows:

- a. In a text editor, open the following file:

```
C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-  
schemas\MicrosoftActiveDirectory\  
activedirectory_ims8.ldif
```

- b. Replace all instances of `{root}` with the root organization for the directory.

The root organization must match the root organization that you specified when you configured the policy store in the Policy Server Management Console.

For example, if the root is `dc=myorg,dc=com`, replace
`dn: CN=imdomainid6,CN=Schema,CN=Configuration,{root}` with `dn:
CN=imdomainid6,CN=Schema,CN=Configuration,dc=myorg,dc=com`

- c. Save the file.
3. Add the schema file as described in the documentation for your directory.

Configure Microsoft ADAM

To configure a Microsoft ADAM policy store, you apply the adam_ims8.ldif script.

To configure a Microsoft ADAM policy store

1. Configure the directory as a supported SiteMinder Policy Store.
Note: Be sure that SiteMinder is pointing to this policy store. For configuration instructions, see the *CA SiteMinder Web Access Manager Policy Server Installation Guide*.
2. Modify the adam_ims8.ldif schema file as follows:
 - a. In a text editor, open this file:
`C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-schemas\MicrosoftADAM\adam_ims8.ldif\`
 - b. Replace every cn={guid} reference with the string you found when you configured the SiteMinder policy store in Step 1 of this procedure.
For example, if the guid string is CN={39BC711D-7F27-4311-B6C0-68FDEE2917B8}, then replace every cn={guid} reference with CN={39BC711D-7F27-4311-B6C0-68FDEE2917B8}.
 - c. Save the file.
3. Add the schema file as described in the documentation for your directory.

Configure eTrust Directory Server

To configure an eTrust Directory policy store

1. Configure the directory as a supported SiteMinder Policy Store.
Note: Be sure that SiteMinder is pointing to this policy store. For configuration instructions, see the *CA SiteMinder Web Access Manager Policy Server Installation Guide*.
2. Copy etrust_ims8.dxc from C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-schemas\eTrustDirectory to dxserver_install\config\schema
where dxserver_install is the directory where eTrust Directory is installed.

3. Create a custom schema configuration file as follows:
 - a. Copy the `dxserver_install\config\schema\default.dxc` to `dxserver_install\config\schema\company_name-schema.dxc`.
 - b. Edit the `dxserver_install\config\schema\company_name-schema.dxc` file by adding the following lines to the bottom of the file:

```
# Identity Manager Schema
source "etrust_ims8.dxc";
```
4. Edit the `dxserver_install\bin\schema.txt` file by adding the contents of `C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-schemas\etrust_directory\etrust_ims_schema.txt` to the end of the file.
5. Create a custom limits configuration file as follows:
 - a. Copy the `dxserver_install\config\limits\default.dxc` to `dxserver_install\config\limits\company_name-limits.dxc`.
 - b. Increase the default size limit to 5000 in the `dxserver_install\config\limits\company_name-limits.dxc` file as follows:

```
set max-op-size=5000
```
6. Edit the `dxserver_install\config\servers\dsa_name.dxi` as follows:

```
# schema
source "company_name-schema.dxc";

#service limits
source "company_name-limits.dxc";
```

where `dsa_name` is the name of the DSA using the customized configuration files.
7. Run the `dxsyntax` command.

This utility will report any errors with the directory configuration. If this utility runs with no errors, continue to Step 8.
8. Stop and restart the eTrust DSA as the `dsa` user to make the schema changes take effect, as follows:

```
dxserver stop dsa_name
dxserver start dsa_name
```

Configure Novell eDirectory Server

To configure an Novell eDirectory Server policy store, you apply the novell_ims8.ldif script.

To configure an Novell eDirectory policy store

1. Configure the directory as a supported SiteMinder Policy Store.

Note: Be sure that SiteMinder is pointing to this policy store. For configuration instructions, see the *CA SiteMinder Web Access Manager Policy Server Installation Guide*.

2. Find the DN of the NCPServer for your Novell eDirectory Server by entering the following information in a command window on the system where the Policy Server is installed:

```
ldapsearch -h host -p port_number -b container -s sub  
-D admin_login -w password objectClass=ncpServer dn
```

For example:

```
ldapsearch -h 192.168.1.47 -p 389 -b "o=nwqa47container" -s sub -D  
"cn=admin,o=nwqa47container" -w password objectClass=ncpServer dn
```

3. Open the novell_ims8.ldif file.
4. Replace every NCPServer variable with the value you found in Step 2.

The novell_ims8.ldif is located in:

```
C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-  
schemas\NovelleDirectory\
```

For example, if the DN value is cn=servername,o=servercontainer, you would replace every instance of *NCPServer* with *cn=servername,o=servercontainer*.

5. Update the eDirectory Server with the novell_ims8.ldif file.

See the Novell eDirectory documentation for instructions.

Configure Oracle Internet Directory (OID)

To configure an Oracle Internet Directory policy store

1. Configure the directory as a supported SiteMinder Policy Store.

Note: Be sure that SiteMinder is pointing to this policy store. For configuration instructions, see the *CA SiteMinder Web Access Manager Policy Server Installation Guide*.

2. Update the Oracle Internet Directory Server with the oracleoid_ims8.ldif file, which is located in the following directory:

```
C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-  
schemas\OracleOID\
```

See the Oracle Internet Directory documentation for instructions.

3. Start the Policy Server services as follows:
 - a. Open the Policy Server Management Console.
 - b. Click the Update button in the console and verify that the services started successfully.

Note: If you experience a timeout when searching for Admin roles using the wildcard (*) character, create a SearchTimeout string value in the LdapPolicy key in the registry. Set the value to a number greater than 20 seconds, which is the default search timeout, then restart the Policy Server services.

To access the registry on Windows, open Start, Run. Enter REGEDT32 in the Run window. On Solaris, open *siteminder_installation/registry/sm.registry*.

The LdapPolicy key is located in:

HKEY_LOCAL_MACHINE\SOFTWARE\Netegrity\SiteMinder\CurrentVersion\Ds\

Verify the Policy Store

To verify the policy store, confirm the following:

- Your Policy Server log does not contain a section of warnings that begins with the following:

*** IMS NO SCHEMA BEGIN

Note: For SiteMinder r6.x, check smps.log.

This warning appears only if you have installed the Identity Manager Extensions for the SiteMinder Policy Server, but you have not extended the Policy Store schema.

- The Identity Manager objects exist in the policy store database or directory. The Identity Manager objects begin with an ims prefix.

Chapter 6: Configuring Provisioning

This section contains the following topics:

[Installation Status](#) (see page 55)

[Important Notes for Provisioning Installation](#) (see page 56)

[How to Configure Provisioning](#) (see page 56)

[Provisioning Manager Setup](#) (see page 57)

[Configure the Provisioning Manager](#) (see page 57)

[Optional Provisioning Components](#) (see page 58)

Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
	1. Install prerequisite hardware and software.
	2. Install Identity Manager components.
	3. Start Identity Manager.
	4. (Optional) Protect Identity Manager with SiteMinder.
X	5. (Optional) Configure provisioning.
	6. (Optional) Configure email notification.
	7. (Optional) Configure workflow.
	8. (Optional) Install reporting.
	9. (Optional) Configure internationalization.

Important Notes for Provisioning Installation

If you want to implement provisioning within your Environment, review the following process for the high-level steps:

1. Install eTrust Directory on a different system from the one where you plan to install the Identity Manager Server and the Provisioning Server. For a list of supported versions of eTrust Directory, see the Identity Manager Support Matrix on the Identity Manager support site <http://ca.com/support>. You can also download eTrust Directory from this site (a license for eTrust Directory is included with Identity Manager).
2. Run the Identity Manager installer to run the Provisioning Directory Initialization on the system where eTrust Directory is installed.

This will set up your directory for provisioning.

3. Run the Identity Manager installer to install the Identity Manager Server and the Provisioning Server on the system where a supported application server is installed.

Important! You must be logged in as a Local Administrator for the Provisioning Server installation.

4. Access the Management Console and configure it for provisioning.

Note: For more information about configuring the Management Console for provisioning, see the *Provisioning Guide*.

5. Configure the Provisioning Manager.
6. Consider optional provisioning components for installation.

How to Configure Provisioning

Perform the following steps to configure Identity Manager provisioning:

Step
1. If your Provisioning Server is remote (not on the same system as the Provisioning Manager), run the Provisioning Manager setup.
2. Configure the Identity Manager Server and notifications within the Provisioning Manager.
3. Consider optional Provisioning Components to install.

Provisioning Manager Setup

If your Provisioning Server is remote (not on the same system as the Provisioning Manager), run the Provisioning Manager setup.

Note: To install the Provisioning Manager, install the Identity Manager Administrative Tools on a Windows system.

To run the Provisioning Manager setup

1. Go to Start, Programs, CA, Identity Manager, Provisioning Manager Setup
2. Enter the hostname of the Provisioning Server.

Note: You must use the hostname, entering localhost or an IP will not work.

3. Click Configure.
4. Click Ok.

You can now start the Provisioning Manager and see the domain name that you configured.

Configure the Provisioning Manager

Set up the Identity Manager Server and enable inbound synchronization in the Provisioning Manager.

To configure the Provisioning Manager

1. Go to Start, Programs, CA, Identity Manager, Provisioning Manager
2. Log in to the Provisioning Manager using the global username and password you provided while installing the Identity Manager Administrative Tools.
3. Click System.
4. Click Identity Manager Setup on the left.
5. Enter the hostname, port number and environment alias for the Identity Manager server.
6. Click Add.
7. Click Apply.

Note: If you get a shared secret error, re-enter the password under Shared Secret and Confirm Shared Secret and click Apply again.

8. Click Domain Configuration on the left.
9. Expand the Identity Manager Server folder and click Enable Notification.

10. Click Edit.
11. Change the value to Yes.
12. Click Apply.
13. Restart the Provisioning Server.

Optional Provisioning Components

Once you've installed Identity Manager with Provisioning, you can do the following post-installation configurations:

- Configure Endpoint Types
- Acquire Endpoints

Optional components for Identity Manager provisioning include the following:

- GINA
- Password Synchronization Agent
- Credential Provider
- Connector Server Framework

Note: For more information on advanced provisioning topics, see the *Provisioning Guide*.

Java Connector Server

The *Java Connector Server (Java CS)* is a server component which handles hosting, routing to, and management of Java connectors. The Java CS provides a Java alternative to the C++ Connector Server. It is architecturally and functionally similar to the C++ Connector Server, except that it has a Java API instead of a C++ API, which allows your connectors to be implemented in Java. In addition, the Java CS is data-driven rather than code-driven, which allows more functionality to be addressed by the container (or Java CS) instead of by connectors themselves.

The Provisioning Server handles provisioning of users, and then delegates to connectors (using the C++ Connector Server or Java Connector Server) to manage endpoint accounts, and groups.

Note: For more information on the Java Connector Server, see the *Java Server Connector (JCS) Implementation Guide*.

Connectors

Before you can acquire any endpoint, first install the endpoint connector that manages that kind of endpoint. In some cases, you must install an agent on each system you manage.

Provisioning connectors run on the Provisioning Server and communicate with the systems managed by an endpoint in a domain. For example, machines running Advanced Directory Services (ADS) can be managed only if the ADS Connector is installed on the Provisioning Server.

Some of the connectors have prerequisites that you must meet before you can successfully install them. See the connector guides to review the prerequisites for connectors you want to install.

By default, Identity Manager configures the following connectors during installation:

- Active Directory Services
- Unix ETC
- Generic LDAP
- Universal Provisioning
- Windows NT
- MS-SQL Server

Note: For more information about each connector, see the corresponding Connector Guide.

High Availability

Note: For more information on implementing a high-availability environment, see the *High Availability Guide*.

Chapter 7: Configuring Email Notification

This section contains the following topics:

[Installation Status](#) (see page 61)

[How to Configure Email Notification](#) (see page 62)

[Configure SMTP Settings](#) (see page 62)

[Enable Email Notification](#) (see page 63)

Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
	1. Install prerequisite hardware and software.
	2. Install Identity Manager components.
	3. Start Identity Manager.
	4. (Optional) Protect Identity Manager with SiteMinder.
	5. (Optional) Configure provisioning.
X	6. (Optional) Configure email notification.
	7. (Optional) Configure workflow.
	8. (Optional) Installing reporting.
	9. (Optional) Configure internationalization.

How to Configure Email Notification

The following checklist describes the steps to configure Identity Manager's email notification feature:

✓	Step
1. Configure SMTP for the application server.	
2. Enable email notification through the Management Console	

Configure SMTP Settings

The `imsSetup` utility that you run after installing the Identity Manager components configures a new mail session object called `mailMail`.

For the email notification feature to work correctly, specify the server that WebSphere connects to when sending email in the Mail Transport Host field for the `mailMail` session.

The `mailMail` session is located in Resources, Mail Providers, Built-in Mail Provider, Mail Sessions, `mailMail` in the WebSphere Administration Console.

Note: To view the `mailMail` object, change the Scope to Server in the Mail Session screen. If you do not change the scope to Server, the `mailMail` object is not displayed.

For more information on configuring a WebSphere mail provider, see the WebSphere documentation.

Enable Email Notification

Perform the following procedure to configure email notification.

To enable email notification for an Identity Manager environment

1. In the Environments screen, click the name of the appropriate Environment.
The Identity Manager environment Properties screen opens.
2. Click Advanced Settings, Email.
The Email Properties screen opens.
3. To enable email notification for the Identity Manager environment, select the Enable check boxes that apply:

- Events E-mail Enabled

Enables email notification for Identity Manager events

- Tasks Email Enabled

Enables email notification for Identity Manager tasks

Note: For more information on event and task level email notifications, see the *Administration Guide*.

4. Enter the location of the email templates that Identity Manager uses to create the email messages.

The email templates are located in a subdirectory in the following location:
IdentityMinder.ear\custom\emailTemplates

Note: When you create an email template file with a file name using a different language, the operating system session should be operating in a language that supports the character set. For more information on deploying custom email templates, see the *Administration Guide*.

5. Specify the events for which email notifications are sent as follows:
 - To add an event, select the event in the Event list box, and click Add.
Identity Manager adds the event you selected to the list of events for which email notifications are sent.
Note: If you select an event that is not associated with a workflow process, Identity Manager sends an email notification when the event completes.
 - To delete an event, select the event's check box, then click Delete.

6. Specify the tasks for which email notifications are sent as follows:

- To add a task, search for the task by selecting a condition in the first field, and entering a task name in the second field. Click Search.

You can enter a partial task name by using the wildcard (*) character. For example, to search for a Create task, enter Create*.

Select one or more tasks from the search results. Click Add.

Note: Task-level email notifications are not available for tasks that have the action type View or Self View. To see the action type of a task, go to Modify Admin Task, Select a Task, and check the action field in the task profile.

- To delete a task, select the task's check box, then click Delete.

Deleting a task removes the task from the Task table. It does not delete the task.

Chapter 8: Configuring Workflow

This section contains the following topics:

[Installation Status](#) (see page 65)

[How to Configure Workflow](#) (see page 65)

[Enable Workflow](#) (see page 66)

[Configure WorkPoint Administrative Tools](#) (see page 66)

Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
	1. Install prerequisite hardware and software.
	2. Install Identity Manager components.
	3. Start Identity Manager.
	4. (Optional) Protect Identity Manager with SiteMinder.
	5. (Optional) Configure provisioning.
	6. (Optional) Configure email notification.
X	7. (Optional) Configure workflow.
	8. (Optional) Installing reporting.
	9. (Optional) Configure internationalization.

How to Configure Workflow

The following checklist describes the steps to configure Identity Manager's workflow feature:

✓	Step
	1. Enable workflow in the Management Console
	2. (Optional) Configure WorkPoint Administrative Tools if you plan to use WorkPoint Designer.

Enable Workflow

To enable workflow, use the Management Console.

Note: For more information, see the *Configuration Guide*.

To enable workflow in the Management Console

1. Run the Management Console.
`http://im_fqdn:port/idmmanage`
2. Select an Environment.
3. Select Advanced Settings.
4. Select Workflow.
5. Check Enable.
6. Click Save.
7. Restart the application server.

After you enable workflow, you can find information about how to use Identity Manager's workflow features in the *Administration Guide*.

Configure WorkPoint Administrative Tools

WorkPoint Designer is software from Insession Technologies that is integrated with Identity Manager. WorkPoint Designer lets you manage workflow processes and workflow jobs. WorkPoint Administrative Tools include WorkPoint Designer and WorkPoint Archive. In order to configure WorkPoint Administrative Tools, install the Identity Manager Administrative Tools. If you have not installed the Identity Manager Administrative Tools, you can run the installer and select the Identity Manager Administrative Tools option.

Note: To use the Administrative Tools for workflow, a supported JDK must be installed on the system where the Administrative Tools are installed. For a complete list of supported platforms and versions, see the Identity Manager Support Matrix on the Identity Manager support site <http://ca.com/support>.

The workflow client tools are located in:

`C:\Program Files\CA\IAM Suite\Identity Manager\tools\Workpoint`

The tools in this directory allow you to do the following:

- Create the workflow database schema
- Load the default workflow scripts
- Design and monitor Workflow processes and jobs

Edit init.bat/init.sh

To edit init.bat / init.sh

1. In a text editor, edit one of the following files:

- **Windows:**

C:\Program Files\CA\IAM Suite\Identity Manager\tools\Workpoint\bin\init.bat

- **UNIX:**

HOME/CA/IAM_Suite/Identity_Manager/tools/Workpoint/bin/init.sh

2. Uncomment the following lines in the section for IBM WebSphere 5 application servers:

Note: The following lines exist in init.bat. The corresponding lines in init.sh vary slightly.

```
SET JAVA_HOME=C:\WebSphere\AppServer\java\jre
```

```
SET WAS_HOME=C:\WebSphere\AppServer
```

```
SET
```

```
WAS_EXT_DIRS=%JAVA_HOME%\lib;%JAVA_HOME%\lib\ext;%WAS_HOME%\classes;%WAS_HOME%\lib;%WAS_HOME%\lib\ext;%WAS_HOME%\properties
```

```
SET WAS_BOOTCLASSPATH=%JAVA_HOME%\lib\ext\ibmorb.jar;%WAS_HOME%\properties
```

```
SET PATH=%JAVA_HOME%\bin
```

```
SET JAVAXPARMS=-Xbootclasspath/p:%WAS_BOOTCLASSPATH%
```

```
SET JAVADPARMS=-Djava.ext.dirs=%WAS_EXT_DIRS%
```

```
SET WP_CLASSPATH=./lib/wpClient_ibm.jar;%WP_CLASSPATH%
```

Note: Do not comment the WP_CLASSPATH entry in the COMMON WP_CLASSPATH section.

3. If necessary, replace the values for JAVA_HOME and WAS_HOME with the appropriate paths for your environment.

Edit workpoint-client.properties

You must edit the workpoint-client.properties file based on the type of application server you selected during the Identity Manager installation.

To configure the workpoint-client.properties file

1. Open C:\Program Files\CA\IAM Suite\Identity Manager\tools\Workpoint\conf\workpoint-client.properties in a text editor.
2. Locate the section titled IBM WEBSPPHERE SETTINGS.

3. Uncomment all of the property values in that section.

For example:

```
java.naming.factory.initial=com.ibm.websphere.naming.WsnInitialContextFactory
java.naming.provider.url=iiop://localhost:bootstrap_port
client.enableRMISecurity = true
```

Note: The bootstrap port number must match the port number specified in the WebSphere Administration Console. To locate the correct port number, go to Server, Endpoints, Bootstrap server address.

4. Update BOOTSRAP_ADDRESS port for the WebSphere profile as follows:
 - a. In the WebSphere Admin Console, navigate to Application Servers, server_name, Communications.
 - b. Expand Ports.
 - c. Edit the workpoint-client.properties file under IdentityMinder.ear/config.
 - d. Change the default port 2809 in the WebSphere section to the profile's port for the BOOTSRAP_ADDRESS.
5. Save the file.

Chapter 9: Installing Reporting

This section contains the following topics:

[Installation Status](#) (see page 69)

[Reporting Architecture](#) (see page 70)

[Reporting Considerations](#) (see page 71)

[Hardware Requirements](#) (see page 71)

[How to Install Reporting](#) (see page 72)

[Verify the Reporting Installation](#) (see page 81)

[Silent Installation](#) (see page 81)

[How to Uninstall the Report Server](#) (see page 81)


Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
	1. Install prerequisite hardware and software.
	2. Install Identity Manager components.
	3. Start Identity Manager.
	4. (Optional) Protect Identity Manager with SiteMinder.
	5. (Optional) Configure provisioning.
	6. (Optional) Configure email notification.
	7. (Optional) Configure workflow.
X	8. (Optional) Install reporting.
	9. (Optional) Configure internationalization.

Reporting Architecture

In Identity Manager, the reporting setup requires the three major components in the following diagram:

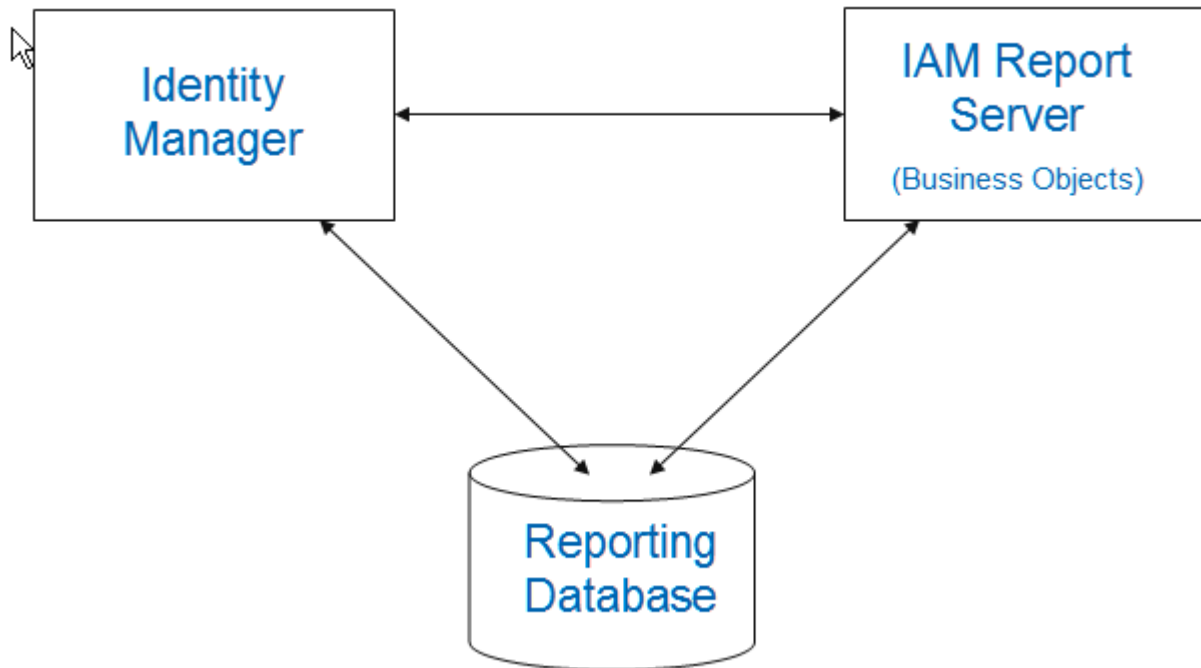

IAM Report Server

Also known as CA Business Intelligence, this server generates reports, communicating directly with CA Identity Manager and the Snapshot Database.

Identity Manager

Identity Manager allows you to export Identity Manager object data to the Reporting Database.

Report Database

The database where the CA Report Server stores its own data.

Shapshot Database

A separate database containing the snapshot data of objects in CA Identity Manager.

Important! The Report Server uses Business Objects Enterprise. If you already have a Report Server in your environment and want to use it with CA Identity Manager, the minimum version required by CA Identity Manager is CA Business Intelligence 3.2.

Reporting Considerations

Consider the following before installing the report server:

- Installing the Report Server can take up to two hours.
- If JBoss is installed on the computer where you are installing the Report Server, port conflicts may occur. If you experience port conflicts after installing the Report Server, you can locate JBoss port information in the following files:

- jboss-service.xml

Default location: *jboss_home\server\server_configuration\conf*

- server.xml

Default location:

jboss_home\server\server_configuration\deploy\jboss-web.deployer

jboss_home

Specifies the JBoss installation path.

server_configuration

Specifies the name of your server configuration.

Default value: default

Note: Restart JBoss if you make changes to either of these files.

Hardware Requirements

The hardware requirements for the Report Server are based on the operating system:

- For UNIX, see the "Minimum Hardware Requirements" section in *installer-media-root-directory/Docs/supported-platforms-SP3-Windows.pdf*.
- For Windows, see the "Minimum Hardware Requirements" section in *installer-media-root-directory/Docs/supported-platforms-SP3-Solaris.pdf*.

Note: For more information about supported OS versions and databases, see the Business Objects web site

<http://support.businessobjects.com/documentation/>.

How to Install Reporting

The following checklist describes the steps to install Identity Manager's reporting feature:

✓	Step
	1. Review the report pre-installation checklist.
	2. Gather reporting information.
	3. Open ports required by the Report Server.
	4. Install the Report Server
	5. Run the Registry Script.
	4. Copy the JDBC JAR files.
	5. Deploy the default reports.

Note: For more information on configuring reporting after the installation, see the *Administration Guide*.

Reports Pre-Installation Checklist

You may want to print the following to use as a checklist to help ensure you meet the minimum system and database requirements before installing the report server:

- Be sure that the Windows or UNIX system on which you are installing the Report Server meets the minimum system requirements.
- Be sure that you use MySQL for the Report Database.
- If you create a database instance for the Snapshot Database, run the following scripts on the new database:
 - Microsoft SQL: C:\Program Files\CA\Identity Manager\IAM Suite\Identity Manager\tools\imrexport\db\sqlserver\ims_mssql_report.sql
 - Oracle: C:\Program Files\CA\Identity Manager\IAM Suite\Identity Manager\tools\imrexport\db\oracle\ims_oracle_report.sql

To execute these scripts, the database user needs DBA, connect, and resource roles and system privileges to create tables, indexes, sessions and views with global query rewrite privilege.

- On UNIX, set the following parameters as global in the local .profile files:
 - ORACLE_BASE: the top-level directory where Oracle is installed.
 - ORACLE_HOME: the path to the Oracle root directory under ORACLE_BASE
 - LD_LIBRARY_PATH: \$ORACLE_HOME/lib32:\$ORACLE_HOME/lib
If Oracle is a 64-bit installation, use lib32. Use SQL Plus to connect to the oracle database instance to determine if it is a 64-bit installation.
 - ORACLE_SID: the SID name used in the tnsnames.ora file.
 - JAVA_HOME: the path to the Java root directory. Business Objects installs a JDK in the following location:
report_server_home/jre
Note: JDK 1.5 is the minimum version supported for reports.
 - PATH:
\$LD_LIBRARY_PATH:\$JAVA_HOME:\$JAVA_HOME/bin:\$ORACLE_HOME/bin:\$PATH
 - LC_ALL: en_US.UTF-8
Note: Be sure that the CASHCOMP environment variable is empty.
- On UNIX systems:
 - 3 GB of free space is required under /tmp.
 - You need access to a non-root user account to install the Report Server.
This user should have a home directory in the local file system. For example, the following command creates a user with a local home directory:
useradd -u 505 -g 0 -d /export/home/cabi -m cabi
Also, add the non-root user to the oinstall group and any group for which the root user is a member.
 - Enter the database server name in the /etc/hosts file if the database server is not on the same system as the Report Server.
 - If you encounter problems, inspect the SDK.log under these locations:
/opt/CA/SharedComponents/CommonReporting3/ca-install.log
/opt/CA/SharedComponents/CommonReporting3/CA_Business_Intelligence_InstallLog.log

Reporting Information

Record the following information you need during the Report Server installation:

Field Name	Description	Your Response
Administrator Password	Defines the password to log in to the Business Objects Infoview console.	
User Name	Identify the username for the Reporting Database.	
Password	Identify the administrative password credentials for the Report Database.	
Pre-Installed Tomcat Information	Identify the path and port numbers for any previous installation of Tomcat. If you do not want to use a previous installation of Tomcat, Report Server installer can install Tomcat.	
Tomcat Port Number	The Tomcat connection, redirect, and shutdown ports. Note: If you are installing the Report Server on the same system as the Identity Manager, ensure that the Tomcat connection port does not conflict with the port number you specified for the application server URL when installing CA Identity Manager.	

Open Ports for the Report Server

For CA Identity Manager and the Report Server to communicate successfully, the following ports must be opened.

- The Central Management Server (CMS) port: 6400

- The Report Server web application port:

- JBoss/Tomcat: 8080
- WebLogic: 7001
- WebSphere: 9080

Note the following:

- This port is not the application server port for the Identity Manager Server.
- The web server ports are provided during the Report Server installation. If you use different ports during the installation, those ports must be opened through the firewall when the Report Server is deployed in production.
- The Report Server does not connect to the application server used by CA Identity Manager.
- All database ports that CA Identity Manager has configured for the reporting and auditing databases. The Identity Manager Server must send database information to the Report Server, so these ports must be opened. For example, if the Snapshot Database is an Oracle database, the Report Server needs the Oracle port open outbound.

Install the CA Report Server

You can install the Report Server on a supported Windows or UNIX system. The following sections detail how to install the Report Server using a Windows and UNIX installation wizard.

Important! For a production environment, install the Report Server on a separate system from the system with the Identity Manager Server. If you want to install the Report Server on the same system as the Identity Manager Server for demonstration purposes, select non-default ports for 8080 and 1099.

Note: CA Identity Manager supports CA Business Intelligence 3.2 (which is Business Objects XI 3.0 SP3).

Run the Windows Installer

Install the Report Server using the Windows installation wizard (Disk1\InstData\VM\Install.exe) found on the Report Server media.

To install the Report Server

1. Exit all applications.
2. Download the Report Server and unzip it.

The Report Server is available for download on the CA Support site, under CA Identity Manager product downloads.

3. Navigate to Disk1\InstData\VM and double-click the installation executable.

The installation wizard starts.

4. Use the gathered reporting information to install the Report Server.

Note the following:

- Select a New install during installation. This choice helps ensure that you use MySQL as the Report Database. If you must set non-default ports to avoid port conflicts, select a Custom install, but be sure to select MySQL for the Report Database.
- Select Tomcat as the web server, deselecting IIS.
- If you are installing the Report Server on the same system as CA Identity Manager, select the Tomcat connection port carefully. Verify that it does not conflict with the port number you specified for the application server URL when installing CA Identity Manager. However, we recommend installing the Report Server on a different system than the Identity Manager Server in a production environment.

5. Review the installation settings and click Install.

The Report Server is installed.

Run the UNIX Installer

Add execute permissions to the install file by running the following command:
`chmod+x /ca-iamreportserver-12.5-solaris/cabiinstall.sh`

Important! The installer may crash if executed across different subnets. To avoid this problem, install the Report Server directly on the host system.

To install the Report Server

1. Log in as the non-root user you created to install the Report Server.
2. Exit all applications.
3. Download the Report Server and untar it.

The Report Server is available for download on the CA Support site, under CA Identity Manager product downloads.

4. Open a command window and navigate to where the install program is located.
5. Enter the following command:

```
/ca-iamreportserver-12.5-solaris/cabiinstall.sh gui
```

6. Use the gathered reporting information to install the Report Server.
7. Note the following:
 - Select a New install during installation. This choice helps ensure that you use MySQL as the Report Database. If you set non-default ports to avoid port conflicts, select a Custom install, but be sure to select MySQL for the Report Database.
 - Select Tomcat as the web server.
 - If you are installing the Report Server on the same system as CA Identity Manager server, be sure that the Tomcat connection port does not conflict with the port number you specified for the application server URL when installing CA Identity Manager.
 - The installer installs the Report Server to `/opt/CA/SharedComponents/CommonReporting3`. Specifying another location does not change the installation location. So the `/opt/CA` directory must have non-root user permissions or the installation fails.
8. Review the installation settings and click Install.

The Report Server is installed.
9. Click Done.

Run the Registry Script

For CA Identity Manager to change data sources for reports in the Report Server, run the mergeConnection script.

Note: On a 64-bit system, omit this procedure. The Report Server is a 32-bit application, so you use the 32-bit side of the registry. Open REGEDT32 directly from SysWOW64, and create the MergeConnectionProperties key with the Type REG_SZ and value Yes. Create the key in this location:

@HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\Business Objects\Suite 12.0\Crystal Reports\DatabaseOptions

On the Report Server, the default location for this script is as follows:

- Windows: C:\Program Files\CA\Identity Manager\IAM Suite\Identity Manager\tools\ReportServerTools.
- UNIX:
/opt/CA/IdentityManager/IAM_Suite/Identity_Manager/tools/ReportServerTools.

On Windows, perform the following steps:

1. Run the mergeconnections_3.0.reg script and respond to the prompts that appear.
2. Click Start, Program Files, CA, Report Server, Central Configuration Manager.
3. Start all services, including Tomcat and the BO Server service.

On UNIX, perform the following steps:

1. Check for Windows control characters in the mergeconnections script.

If you downloaded the software using FTP in binary mode, these characters do not appear in this script. If you used another download method, use the dos2unix command to remove these characters.

2. Copy the mergeconnections_3.0.cf script from the ReportServerTools directory to the following directory

installation-directory/bobje/enterprise120/generic

3. Source in the environment variables for BusinessObjects Enterprise, as follows:

source installation-directory/bobje/setup/env.sh

4. Run the following script, as follows:

./configpatch.sh mergeconnections_3.0.cf

Select 1 as the option when prompted.

5. Restart crystal processing servers as follows:

- a. Log in as the non root user you used to install the Report Server.
- b. Issue these commands:

```
cd /opt/CA/SharedComponents/CommonReporting3/bobje
./stopservers
./startservers
```

Copy the JDBC JAR Files

To copy the jdbc JAR files

1. Navigate to the jdbcdrivers folder on the CA Identity Manager media, as follows:
 - Windows: C:\Program Files\CA\Identity Manager\IAM Suite\Identity Manager\tools\lib\jdbcdrivers
 - UNIX:
/opt/CA/IdentityManager/IAM_Suite/Identity_Manager/tools/lib/jdbcdrivers
2. Copy ojdbc14.jar (for Oracle) or sqljdbc.jar (for SQL Server) to the following location:
 - Windows: CA\SC\CommonReporting3\common\4.0\java\lib
 - UNIX: /opt/CA/SharedComponents/CommonReporting3/bobje/java/lib
3. Open the CRConfig.xml file, found in the following location:
 - Windows: CA\SC\CommonReporting3\common\4.0\java
 - UNIX: /opt/CA/SharedComponents/CommonReporting3/bobje/java
4. Add the location of the JDBC JAR files to the Classpath. For example:
 - Windows:
<Classpath>report_server_home\common\4.0\java\lib\sqljdbc.jar;
report_server_home\ common\4.0\java\lib\ojdbc14.jar
...</Classpath>
 - UNIX:
<Classpath>\${BOBJEDIR}/java/lib/sqljdbc.jar:\${BOBJEDIR}/java/lib/
ojdbc14.jar:...</Classpath>
5. Save the file.
6. Restart the Report Server as follows:
 - For Windows, do the following:
 - a. Go to Start, Program Files, CA, Report Server, Central Configuration Manager.
The Central Configuration Manager opens.

- b. Select all services and click Restart.
- For UNIX, do the following:
`cd /opt/CA/SharedComponents/CommonReporting3/bobje`
`./stopservers`
`./startservers`

Deploy Default Reports

CA Identity Manager comes with default reports you can use for reporting. BIconfig is a utility that uses a specific XML format to install these default reports for CA Identity Manager.

If you are upgrading from a previous version of the Report Server, first remove the CA Identity Manager Reports folder using the Central Management Console. The existing reports do not work. You can then deploy default reports for the new Report Server.

Important! This process updates all default reports. If you customized any default reports, be sure to back them up before performing the update.

To deploy the default reports

1. Gather the following information about the Report Server:
 - Hostname
 - Administrator name
 - Administrator password
 - Snapshot database type
2. Copy all content from the Reports installer-root-directory/disk1/cabi/biconfig folder to the *im_admin_tools_dir/ReportServerTools* folder.
3. Set the JAVA_HOME variable to the 32-bit version of the JDK1.5 you installed.
4. Run one of the following commands:
 - For a Microsoft SQL Snapshot Database:
`biconfig -h "hostname" -u "administrator_name" -p "administrator_password" -f "ms-sql-biar.xml"`
 - For an Oracle Snapshot Database:
`biconfig -h "hostname" -u "administrator_name" -p "administrator_password" -f "oracle-biar.xml"`

Note: In a UNIX operating environment, be sure that `biconfig.sh` has execute permissions.

5. View the `biconfig.log` file found in the location where you ran the command in Step 4.
6. Verify that the default reports installed successfully. Inspect the end of the log file for status; a successful install appears as follows:
ReportingDeployUtility - Reporting utility program terminated and return code = 0

Verify the Reporting Installation

To ensure that reporting has been installed correctly, do the following:

- In the Central Configuration Manager, ensure that all services are running.
- Ensure that your reporting database is running.

Note: For more information on configuring reporting after the installation, see the *Administration Guide*.

Silent Installation

For more information about silent installation of the Report Server, see the *CA Business Intelligence Installation Guide*. The Report Server documentation is available in one of the following locations when you extract the Report Server installer files:

- **Windows:** `install_root_directory\Docs\CABI_Impl_ENU.pdf`
- **UNIX:** `install_root_directory/Docs/ENU/CABI_Impl_ENU.pdf`

How to Uninstall the Report Server

You uninstall the Report Server when it is no longer required on the system. For more information, see the CA Business Intelligence documentation.

After uninstalling the Report Server, [Remove Leftover Items](#) (see page 82).

Remove Leftover Items

The following sections detail the items you must manually remove after uninstalling the Report Server to keep the system as clean as possible and to prevent a reinstallation of the Report Server to the same system from failing.

Remove Windows Items

To remove leftover Report Server items on Windows

1. Navigate to *report_server_home*.
report_server_home specifies the report server installation path.
2. Open the BusinessObjects Enterprise 12 folder, and delete the following folders:
 - Data
 - java
 - Logging
 - Samples
 - Web Content
 - Web Services
 - win32x86
3. Return to the Report Server folder.
4. Open the common folder.
5. Open the 4.0 folder, and delete the following folders:
 - crystalreportviewers115
 - java

You have completed removing leftover items.

Remove UNIX Items

To remove leftover Report Server items on UNIX

1. Navigate to the following location from a command prompt:
`/opt/CA/SharedComponents`
2. Delete the CommonReporting3 folders.

Chapter 10: Configuring Internationalization

This section contains the following topics:

[Installation Status](#) (see page 83)

[How to Configure Internationalization](#) (see page 84)

[Internationalization Prerequisites](#) (see page 84)

[Configure the SiteMinder Web Agent](#) (see page 85)

[Create Language-Specific Tasks and Roles](#) (see page 85)

[Restrictions on the Use of International Character Sets](#) (see page 86)

Installation Status

The following table shows you where you are in the installation process:

You Are Here	Step in Installation Process
	1. Install prerequisite hardware and software.
	2. Install Identity Manager components.
	3. Start Identity Manager.
	4. (Optional) Protect Identity Manager with SiteMinder.
	5. (Optional) Configure provisioning.
	6. (Optional) Configure email notification.
	7. (Optional) Configure workflow.
	8. (Optional) Install reporting.
X	9. (Optional) Configure internationalization.

How to Configure Internationalization

To configure Identity Manager for internationalization, complete the following steps:



Step

1. Confirm that the system hosting Identity Manager satisfies the prerequisites.

2. (Optional) Configure the SiteMinder Web Agent for Internationalization.

Internationalization Prerequisites

Before installing support for internationalization, note the following:

- If you are using SiteMinder, ensure that a supported version of the SiteMinder Policy Server is installed and configured.
- Ensure that the LDAP directory is not enforcing a 7-bit check for the user ID, password, and email attribute. See the documentation for the LDAP directory you are using.
- Ensure the user directory is configured to support localization. For more information, see the relevant user directory documentation.
- Identity Manager must be installed and configured, and at least one Environment exists.

Note: If you are using SiteMinder and your Environment manages users with multi-byte user IDs, those users must authenticate with a SiteMinder authentication scheme that supports multi-byte characters. For example, HTML Forms Based authentication. The basic authentication scheme does not support multi-byte authentication. For information on configuring an authentication scheme for Identity Manager, see the chapter on configuring SiteMinder Features for Identity Manager in the *Configuration Guide*.

Configure the SiteMinder Web Agent

Configure the encoding for HTTP header values that the SiteMinder Web Agent passes to Identity Manager by setting the HTTPHeaderEncodingSpec parameter as follows:

```
HTTPHeaderEncodingSpec=encoding_spec, wrapping_spec
```

where *encoding_spec* is a text string that represents one of the following encoding types: UTF-8 or Shift-JIS, and *wrapping_spec* is the wrapping specification, which must be RFC-2047.

For example:

```
HTTPHeaderEncodingSpec="Shift-JIS,RFC-2047"
```

Note: If no value is specified in the HTTPHeaderEncodingSpec parameter, the encoding is UTF-8 with no wrapping.

You can configure the HTTPHeaderEncodingSpec parameter centrally in the Agent Configuration Object or locally for each Web Agent, in the WebAgent.conf file.

Note: For more information, see the *CA SiteMinder Web Access Manager Web Agent Configuration Guide*.

Create Language-Specific Tasks and Roles

Identity Manager includes sample role definition files, which you can use to create French, Korean, Japanese, or German versions of the Identity Manager roles and tasks that appear in the User Console. You can use these samples as defined to create the default roles and tasks, or use the samples as templates for creating a custom set of roles and tasks.

These files are installed in the following location:

```
C:\Program Files\CA\IAM Suite\Identity  
Manager\tools\samples\Localization\language
```

where *language* is the language that you want to use.

To import a role definitions file

1. In the Management Console, click Environments.
A list of Environments appears.
2. Click the name of the appropriate Environment.
The Properties screen for that environment opens.

3. Click Roles.
4. Enter the path and file name for one of the role definitions files, or browse for the file.
5. Click Finish.
The status is displayed in the Role Configuration Output window.
6. Click Continue to exit.

Restrictions on the Use of International Character Sets

The following input must contain ASCII characters only:

- Environment names and aliases
- Directory names
- Class names used in the following APIs:
 - Event Listener API
 - Notification Rule API
 - Logical Attribute API
 - Workflow Organization Resolver API
- Logical attribute names and physical attribute names used by the Logical Attribute
- The URL for the end-user license agreement that appears when users self-register

Note: The end-user license agreement can contain internationalized character sets.

Chapter 11: Reinstalling and Uninstalling Identity Manager

This section contains the following topics:

[Reinstall Identity Manager](#) (see page 87)

[Uninstall Identity Manager](#) (see page 87)

[How to Uninstall Identity Manager](#) (see page 88)

[Remove Identity Manager Objects with the Management Console](#) (see page 88)

[Remove the Identity Manager Schema from the Policy Store](#) (see page 88)

[Uninstall Identity Manager Software Components](#) (see page 90)

[Remove Identity Manager from WebSphere](#) (see page 91)

Reinstall Identity Manager

You can reinstall any of the Identity Manager software components by rerunning the installer. When you run the installer, it detects any Identity Manager components installed on the system. You may reinstall the same components that you originally installed on the system or other components that were not originally on the system.

Note: Reinstalling the Identity Manager Administrative Tools replaces all of the files in the Administrative Tools directory. To prevent overwriting custom files, back up the directory where the Administrative Tools are installed.

Uninstall Identity Manager

To fully uninstall Identity Manager, remove Identity Manager software components and clean up the Identity Manager-specific configuration in your application server.

If you were using SiteMinder, you may also want to remove the SiteMinder Policy Server. For information about removing the Policy Server, see the *CA SiteMinder Web Access Manager Policy Server Installation Guide*.

How to Uninstall Identity Manager

The following checklist describes the steps to uninstall Identity Manager:

 Step
1. Delete Identity Manager objects from the policy store.
2. (Optional) Remove the Identity Manager schema from the policy store.
3. Uninstall the Identity Manager components.
4. Remove Identity Manager configuration information from the application server.

Remove Identity Manager Objects with the Management Console

In order to remove objects created automatically by Identity Manager when you configure Environments and Directories, use the Management Console.

1. Open the Management Console:
`http://im_fqdn:port/idmanage`
2. Click Environments.
3. Select all of the check boxes for the existing Environments.
4. Click Delete.
5. Click Directories.
6. Select all of the check boxes for the existing Directories.
7. Click Delete.

Remove the Identity Manager Schema from the Policy Store

If you were using a SiteMinder Policy Server, remove the Identity Manager schema from the policy store as follows:

- Remove the Identity Manager schema from a SQL Policy Store
- Remove the Identity Manager schema from a LDAP Policy Store

Remove the Identity Manager schema from a SQL Policy Store

On systems where you installed the SiteMinder Policy Server Extensions for Identity Manager, remove the Identity Manager schema by executing the following command:

- **SQL Server:**
C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-schemas\mssql\ims8_mssql_ps_delete.sql
- **Oracle:**
HOME/CA/IAM_Suite/Identity_Manager/tools/policystore-schemas/oracle/ims8_oracle_ps_delete.sql

Remove the Identity Manager schema from a LDAP Policy Store

Note: If you are using Microsoft Active Directory or Microsoft ADAM as a policy store, you do not need to complete this procedure. You cannot remove schema objects from these policy stores. However, you can disable them. See the documentation for your directory for more information.

To remove the Identity Manager schema from a LDAP policy store

1. Complete one of the following:

- If you are using IBM Directory Server as a policy store, in the IBM Directory Server Web Administration user interface, remove the schema file V3.imsschema60 from the Files section of the schema configuration. Then, restart the directory server.

Note: There are no other steps required to remove the schema from an IBM Directory Server. Continue with Uninstall Identity Manager Software Components.
- If you are using eTrust Directory as a policy store, remove the `etrust_ims.dxc` file from `dxserver_install\config\schema`.

`dxserver_install` is the directory where eTrust is installed.

Note: There are no other steps required to remove the schema from an eTrust Directory Server. Continue with Uninstall Identity Manager Software Components.
- If you are using another LDAP directory as a policy store, skip to Step 2.

2. Navigate to the following location:

- **Windows:** C:\Program Files\CA\IAM Suite\Identity Manager\tools\policystore-schemas\
- **UNIX:** HOME/CA/IAM_Suite/Identity_Manager/tools/policystore-schemas

3. Use the appropriate LDIF schema file from the following table to remove the schema from the directory.

For information on removing schema files, see the documentation for your directory.

Directory Type	LDIF File
Novell eDirectory	novell\novell-delete-ims8.ldif
Oracle Internet Directory (OID)	oracle-internet-directory\oracle-internet-directory-delete-ims8.ldif
Sun Java Systems (Sun One, iPlanet)	sunone\sunone-delete-ims8.ldif

Uninstall Identity Manager Software Components

Use the instructions in this section to uninstall Identity Manager components from each system on which you installed a component. For example, if you installed the Identity Manager Server and the Identity Manager Administrative Tools on separate systems, uninstall components from both systems.

Note: To uninstall Identity Manager components, a JVM should be running on the host.

To uninstall Identity Manager software components on Windows

1. Go to Start, Control Panel, Add/Remove Programs and select CA Identity Manager.
2. Select specific components to uninstall. This removes only the Identity Manager components that you select. You can uninstall the following components:
 - Identity Manager Server
 - Identity Manager Administrative Tools
 - Identity Manager Provisioning Server
 - Identity Manager Provisioning Directory Initialization
 - Identity Manager Extensions for SiteMinder
3. Click Change/Remove.

Note: If you want to uninstall Identity Manager completely, uninstall CA Identity Manager *and* CA IAM Suite from Add/Remove Programs.

To uninstall Identity Manager software components on UNIX

1. Navigate to:
`/CA_Identity_Manager/install_config_info/im-uninstall/uninstall`
2. Run the following script:
`sh im-uninstall.sh`
3. Follow the on-screen instructions.

Remove Identity Manager from WebSphere

After uninstalling the Identity Manager software, you can remove the Identity Manager configuration from your application server by using the WebSphere Administrative Console or by executing scripts from the command line.

To remove Identity Manager using the Administrative Console

1. Open the WebSphere Administrative Console using the following URL:
`http://websphere_server:9060/admin`
2. Select Applications, Enterprise Applications.
3. In the Enterprise Applications screen, select the check box next to CA Identity Manager and click Stop.
4. Select the check box next to CA Identity Manager and click Uninstall.
5. If you installed the SiteMinder EAR and SiteMinder Agent EAR, stop these applications, and uninstall them as described above.
6. Click Save.
7. Click Save to save changes to the master configuration.

Remove Identity Manager using the Command Line

Identity Manager includes two scripts that you can use to remove Identity Manager from the WebSphere application server:

- Uninstall script (`imsUninstall.jacl`)—Stops the Identity Manager application, then removes it from WebSphere.
- Cleanup script (`ims6Cleanup.jacl`) —Removes the Identity Manager resources, such as created by running the `imsSetup.jacl` or `ims6Setup` script.

Note: Running the Cleanup script removes resources that are used by all Identity Manager installations running on the same application server. If you have Identity Manager installations on the same system that you do not want to delete, you should not run the Cleanup script.

To remove Identity Manager using the command line

1. Copy `imsUninstall.jacl` and `imsCleanup.jacl/ims6Cleanup.jacl` from `websphere_home\WebSphere-tools\` to `websphere_home\bin`.
2. From the command line, navigate to `websphere_home\bin`.
3. Ensure that the WebSphere application server is running.
4. Run the Uninstall script as follows:
 - **Windows:** `wsadmin -f imsUninstall.jacl`
 - **Unix:** `./wsadmin.sh -f imsUninstall.jacl`
5. Run the Cleanup script as follows:
 - **Windows:** `wsadmin -f cleanup_script websphere_node`
 - **Unix:** `./wsadmin.sh -f cleanup_script websphere_node`

where *cleanup_script* is `ims6Cleanup.jacl` and *websphere_node* is the name of the WebSphere node where Identity Manager was installed.
6. Remove the service integration bus as follows:
 - a. Go to Service Integration, Buses in the WebSphere Administration Console.
 - b. Remove IMSBus.
 - c. Stop the application server.
 - d. Remove the `node_name.server_name.IMSBus` directory under `websphere_home\profiles\default\databases\com.ibm.ws.sib\`

Chapter 12: Upgrading to Identity Manager r12

This section contains the following topics:

[How to Upgrade to Identity Manager r12](#) (see page 93)

[Upgrade Provisioning Server Components](#) (see page 94)

[Upgrade Connectors](#) (see page 97)

[Upgrade the Identity Manager Server](#) (see page 98)

[Unattended Upgrades](#) (see page 117)

How to Upgrade to Identity Manager r12

The following is a list of products and versions that have a supported path for an upgrade to Identity Manager r12:

- Identity Manager r8.1 or later without provisioning (Web Edition).
- Identity Manager r8.1 or later with provisioning.
- eTrust Admin r8.1 SP2

Important! If you are using SiteMinder, Identity Manager r12 requires a SiteMinder Policy Server r6.0.5 CR15 or later.

Perform the following steps to upgrade to Identity Manager r12:

If you currently have...	Perform these upgrade steps...
eTrust Admin r8.1 SP2	1. Upgrade the Provisioning Server Components with the Provisioning Installers. 2. Upgrade the Connectors using the Provisioning Server installer. 3. Perform a new Installation of the Identity Manager Server with the Identity Manager Installer.
Identity Manager r8.1 or later without Provisioning (Web Edition)	1. Upgrade the Identity Manager Server with the Identity Manager Installer. 2. Perform a new Installation of the Provisioning Server Components with the Identity Manager Installer. 3. Install Connectors using the Product Explorer.

If you currently have...	Perform these upgrade steps...
Identity Manager r8.1 or later with Provisioning	1. Upgrade the Provisioning Server Components with the Provisioning Installers. 2. Upgrade the Connectors using the Provisioning Server installer. 3. Upgrade the Identity Manager Server with the Identity Manager Installer.

Upgrade Provisioning Server Components

Important! Only upgrades from eTrust Admin r8.1 SP2 are supported. If you have a previous version of eTrust Admin, first upgrade to eTrust Admin r8.1 SP2 and then continue with the Identity Manager r12 upgrade.

Perform the following steps to upgrade Provisioning (eTrust Admin r8.1 SP2) to Identity Manager r12:

Step
1. Review Important Notes for Provisioning Upgrades
2. Update the Provisioning Directory Schema
3. Gather information for the Provisioning Server upgrade
4. Upgrade the primary Provisioning Server
5. Upgrade other Provisioning components (alternate servers, connector servers, SDK, agents)

Update the Provisioning Directory Schema

In order for Provisioning to work with Identity Manager r12, first upgrade the Provisioning Directory schema on the system running eTrust Directory.

Important! We recommend backing up your eTrust Directory databases before upgrading.

To upgrade the Provisioning Directory schema

1. Navigate to the Provisioning/Provisioning_Directory folder on the Identity Manager installer media.

2. Run the setup file on the system with eTrust Directory.
The upgrade wizard will start.
3. Go through the wizard and enter the required information.
4. On the Custom Location Setup screen, choose the Provisioning Directory installation path.
5. Click Next.
The Provisioning Directory schema will be updated.

Gather Information for Provisioning Server Upgrade

Record the following Provisioning information you need during the Provisioning Server upgrade:

Field Name	Description	Your Response
Directory Host	The hostname of the system with the Provisioning Directory installed.	
Directory Port	The port number of the system with the Provisioning Directory installed.	
Directory DN	The DN of the Provisioning Directory.	
Directory Password	The password for the Provisioning Directory.	
Username	The Provisioning domain administrator's username.	
Password	The Provisioning domain administrator's password.	
Description	Provide a description for the Provisioning administrator.	

Upgrade the Provisioning Server

Note: For more information on how to address Provisioning Server upgrades in a high-availability environment, see the *High Availability Guide*.

To upgrade the Provisioning Server

1. Navigate to the Provisioning/Provisioning_Server folder on the Identity Manager installer media.
2. Run the setup file.
3. Accept the terms of the license agreement and click Next.
4. Choose Custom setup type and click Next.
5. Click Browse if you want to search for another install location, or click Next to install the Provisioning Server in the default location.
6. Choose Provisioning Server and Connector Server (C++) and click Next.
7. Provide the following Provisioning Directory details:
 - Directory Host
 - Directory Port
 - Directory DN
 - Directory PasswordClick Next.
8. All the connectors detected in your environment will be checked for upgrade. Click Next.
9. Choose if the Provisioning Server you are upgrading is the primary server or an alternate server and click Next.
10. Provide the domain name for your Provisioning domain configuration and click Next.
11. Provide the following Provisioning domain administrator details:
 - Username
 - Password
 - DescriptionClick Next.
12. Provide passwords for all Provisioning components and click Next.

The Provisioning Server is upgraded.

Upgrade Other Provisioning Components

Java Connector Server

Run the Java Connector Server installer from the Provisioning Components installation media, and register the Java Connector Server with the Provisioning Server on the final install screen.

Note: For more information on upgrading to the Java Connector Server, see the *Java Connector Server Implementation Guide*.

SuperAgent

Upgrade each SuperAgent by running the Provisioning Server installer on the Identity Manager installation media. Select C++ Connector Server.

eTrust Admin Manager

Run the Provisioning Manager installer on the Identity Manager installation media to upgrade eTrust Admin Manager.

Upgrade Connectors

To upgrade connectors, use the Identity Manager installation media and run the Provisioning Server installer.

Note: For more information on upgrading a specific connector, see the *Connector Guide*.

Custom Java Connectors

The Identity Manager r12 Java Connector Server is compatible with the Identity Manager r8.1 SP2 SDK connector code.

Note: For more information on upgrading custom connectors, see the *Programming Guide for Java Connector Server*.

Custom Options

If you are currently using a SuperAgent with custom options, your custom options will be compatible with the Identity Manager r12 version of the SuperAgent, now called the C++ Connector Server. No upgrade of these options is required.

Upgrade the Identity Manager Server

Perform the following steps to upgrade Identity Manager to Identity Manager r12:

Step
1. Configure a Web Agent.
2. Upgrade the Application Server
3. Upgrade the Identity Manager Server
4. Export the Directories and Environments
5. Modify the Configuration
6. Recreate the Identity Manager Directory
7. Recreate the Environments
8. Additional New Feature Configuration
9. Install the Identity Manager r12 Bookshelf

Configure a Web Agent

If you are using SiteMinder to protect Identity Manager, you will need to configure a [Web Agent](#) (see page 43).

Note: The Servlet Filter Agent is being deprecated in Identity Manager r12. If you are using a Servlet Filter Agent, Identity Manager will work properly after the upgrade, but we recommend configuring a Web Agent for Identity Manager r12.

Upgrade the Application Server

Before you upgrade to Identity Manager r12, upgrade to or install a supported version of your application server. Identity Manager r12 can upgrade in-place on WebSphere. To perform the in-place upgrade, move the previous version of the Identity Manager application to a supported version of WebSphere.

It is not possible to directly upgrade WebSphere 6.0.2.17 to a supported version of WebSphere.

Note: For a complete list of supported platforms and versions, see the Identity Manager Support Matrix on the Identity Manager support site <http://ca.com/support>.

If you are upgrading Identity Manager r8.1 on WebSphere 6.0.2.17 or WebSphere 5.x, complete the following steps prior to the Identity Manager upgrade:

1. Back up your custom files inside the WebSphere EAR, for example, files under the IdentityMinder.ear/custom/ directory.

You will need to reapply these files after you upgrade to Identity Manager r12.

2. Extract the EAR from the Identity Manager r8.1 installation as follows:

Windows:

- a. Copy the following files from *websphere_home\WebSphere-tools* to *websphere_home\bin*:
 - imsExport.bat
 - imsExport.jacl
- b. From the command line, navigate to *websphere_home\bin* and ensure the WebSphere application server is running.
- c. Run the imsExport.bat script as follows:

```
imsExport.bat path_to_exported_ear
```

where *path_to_exported_ear* is the full path and file name that the imsExport utility creates.

UNIX:

- d. Copy *websphere_home*\WebSphere-tools\imsExport.jacl to *websphere_home*\bin.
- e. From the command line, navigate to *websphere_home*\bin and ensure the WebSphere application server is running.
- f. Run the imsExport.jacl script as follows:

```
./wsadmin.sh -f imsExport.jacl -conntype RMI -port 2809  
path_to_exported_ear
```

where *path_to_exported_ear* is the full path including the file name of the exported EAR file.

Note: You can also export the IdentityMinder EAR using the WebSphere Administrative Console. See the WebSphere documentation for more information.

3. Install the extracted Identity Manager r8.1 EAR to a supported version of WebSphere.
4. In order to successfully connect to SiteMinder, you must do the following:
 - a. Log in to the WebSphere Administrative Console.
 - b. Go to Application Servers, server1, Process Definition, Environment Entries.
 - c. Delete the PATH and LD_LIBRARY_PATH entries that point to the agentframework\bin.

Important! We recommend that you disable security at profile creation. For example, create a WebSphere 6.1 profile with the Security Enabled option unchecked. If you do enable security, Identity Manager will still deploy, but you will see security exceptions at startup. You can fix this by setting up WebSphere security appropriately. For more information on setting up WebSphere security, see your WebSphere documentation.

Upgrade the Identity Manager Server

To upgrade the Identity Manager Server, run the Identity Manager Installer. The installer will auto-detect the previous version of Identity Manager and ask you if you want to continue with an upgrade.

Important! Before you upgrade the Identity Manager server, ensure that you perform the necessary [prerequisite steps](#) (see page 101) on WebSphere.

The following components are upgraded with the installer:

- EAR folder names
- All binaries (jars/JSPs)
- All property files (resource bundles, and so forth)
- All additional new JMS queues

All unused files will be deleted.

The following custom configuration files will be preserved:

- Policy Server connection
- Data store definitions
- Custom JSPs

Prerequisite Steps For WebSphere

An upgrade to Identity Manager r12 on WebSphere may fail due to disk space errors or timeout errors. Perform the following steps to ensure that your upgrade to Identity Manager r12 succeeds on WebSphere.

1. Save any changes to the WebSphere configuration via the Admin Console (Save to Master Configuration).
2. Shut down the application server.
3. Remove the contents of the following folders:
 - /tmp/*
 - *Websphere_home*/profiles/WAS_PROFILE/temp/*
 - *Websphere_home*/profiles/WAS_PROFILE/wstemp/*
 - *Websphere_home*/profiles/WAS_PROFILE/tranlog/*
4. Increase the time-out request in the soap.client.props file located in the *websphere_home*/profiles/WAS_PROFILE/properties/ directory. We recommend setting the timeout to 1800 seconds.

Note: For more information, see your WebSphere documentation.

Export the Directories and Environments

In Identity Manager r12, objects previously stored in the SiteMinder Policy Store need to be moved to a relational database object store. After you upgrade to Identity Manager r12, objects will be stored in *both* the Identity Manager object store and the SiteMinder policy server.

Use the r12 Migration Tool (imsconfig.bat/imsconfig.sh) to export your Directory and Environment configurations. Then, use the Management Console to re-import the configurations into r12.

Important! Do not use the Export button under Environments in the Management Console when performing an upgrade. This is for exporting Identity Manager r12 environments only.

Note: Ensure that your SiteMinder Policy Server is running before attempting to export a directory or environment.

To export a Directory and Environment

1. Navigate to the following directory:
C:\Program Files\CA\IAM Suite\Identity Manager\tools\81to12Migration-tool\
2. Export a Directory by running the following command:
`imsconfig -h policy_server_hostname -a agent_name -s agent_shared_secret -u SM_admin_user -p SM_admin_pw -d ims_dir_name -x folder_name`

policy_server_hostname

Specifies the hostname of the system with the Policy Server installed.

agent_name

Defines the agent.

agent_shared_secret

Defines the agent's shared secret.

SM_admin_user

Defines the SiteMinder administrator.

SM_admin_pw

Defines the SiteMinder administrator password.

ims_dir_name

Defines the name of the Identity Manager directory to export.

folder_name

Defines the name of the folder where you'd like the r12 Migration Tool to place the generated directory.xml file.

The Directory configuration is exported into the standard directory.xml file.

3. Export an Environment by running the following command:
`imsconfig -h policy_server_hostname -a agent_name -s agent_shared_secret -u SM_admin_user -p SM_admin_pw -e ims_env_name -m folder_name`

policy_server_hostname

Specifies the hostname of the system with the Policy Server installed.

agent_name

Defines the agent.

agent_shared_secret

Defines the agent's shared secret.

SM_admin_user

Defines the SiteMinder administrator.

SM_admin_pw

Defines the SiteMinder administrator password.

ims_env_name

The name of the Identity Manager environment to export.

folder_name

The name of the folder where you'd like the r12 Migration Tool to place the generated ZIP file.

The Environment configuration is exported into the following ZIP file:

ims_env_name.zip

Modify the Configuration

After upgrade Identity Manager to r12, modify the configuration to support the new architecture. Perform the following steps to modify the Identity Manager configuration.

1. Copy custom files back into Identity Manager EAR
2. Upgrade TEWS
3. Update the web.xml file
4. Copy the JDBC drivers
5. Add new JDBC data sources
6. Modify the RDB user store
7. Enable XA for existing data sources
8. Update the application server proxy forwarder
9. Upgrade workflow

10. Upgrade reporting
11. Configure the Provisioning Manager

Copy Custom Files Back into Identity Manager EAR

Re-add the custom files that you backed up while upgrading the application server. Put these files in `websphere_home/profiles/AppSrv01/installedApps/cell_name/IdentityMinder.ear/custom/`

Upgrade TEWS

In Identity Manager r12, the WSDL file configuration has changed. When upgrading from a previous version of Identity Manager, change the WSDL file to work with r12.

To recreate the WSDL files

1. Generate the WSDL file in Identity Manager r12.
2. Keep the following code segments unchanged:
 - `_PND__PND_objectType`
 - `_PND__PND_friendlyName` (when it is used as password policy friendly name)
 - `_PND__PND_regExValue`
 - `_PND__PND_bNoMatch`
 - `_PND__PND_passwordPolicyOid`
3. Remove any other “`_PND__PND_`” from the customized web service code. Capitalize the first character after “`_PND__PND_`”. For example, `ViewAccessRoleSearchResultResultItem_PND__PND_friendlyName` should be changed to `ViewAccessRoleSearchResultResultItemFriendlyName`.
4. Six method names in six WSDL classes have changed. Modify the customized web service code appropriately if these classes are referenced. The method list is as follows:

If you had this method in Identity Manager r8.1...	Use this method in Identity Manager r12...
<code>setName()</code>	<code>setEventName()</code>
<code>getName()</code>	<code>getEventName()</code>
<code>setTag()</code>	<code>setTabTag()</code>
<code>getTag()</code>	<code>getTabTag()</code>
<code>setWorkflow()</code>	<code>setWorkflowProcess()</code>

If you had this method in Identity Manager r8.1...	Use this method in Identity Manager r12...
<code>getWorkflow()</code>	<code>getWorkflowProcess()</code>

The six WSDL classes are as follows:

- `CreateAdminTaskEventsTabEventCurrentvalue`
- `CreateAdminTaskEventsTabEventModify`
- `ModifyAdminTaskEventsTabEventCurrentvalue`
- `ModifyAdminTaskEventsTabEventModify`
- `ViewAdminTaskEventsTabEventCurrentvalue`
- `ViewAdminTaskEventsTabEventModify`

5. Save the WSDL file.

Upgrade from r8.1 TEWS Changes

If you are upgrading from Identity Manager r8.1, consider the following TEWS changes:

Namespace and Package Name Changes

With this release of Identity Manager, WSDL generation is invoked using a specific URL that generates a single WSDL file with a single namespace. By producing a single WSDL file without references to other files, any existing client code that needs to interact with Identity Manager TEWS may have to be modified.

The single namespace necessitates removing all the namespaces that previously had to be defined to import a WSDL file for each task. This results in a major change when generating the proxies and reduces multiple generated package names to one package name. Your client code will need to be modified to reflect changed package names.

Attribute Name Changes

An Axis-related change involves the transition from Axis 1.2 beta. This change results in a performance boost, but it also affects client code in that the generated proxies vary with the different Axis versions. For example, a lot of underscores used in attribute names have been eliminated, resulting in more readable code.

Result and Status Proxy Values

In previous releases of Identity Manager, if a service returned both a result and a status, special holder classes were generated for proxies so the result and status could be returned by reference from the method call. This exposed a parsing problem with Axis, and required a special patched version of Axis to be shipped with Identity Manager.

In the current release of Identity Manager, the result and status are returned as a single value rather than as two values by reference. This eliminates the requirement to use the patched version of Axis to generate proxies.

Result and Status Code

Result and status information are now contained within a single return value which simplifies client code. The following example demonstrates the holder classes used in previous Identity Manager releases:

```
/* output parameter for status part of the message */
_ImStatusHolder statusHolder = new _ImStatusHolder();
/* output parameter for the return message part */
_ViewMyRolesQueryResultHolder resultHolder =
new _ViewMyRolesQueryResultHolder();
/* this forms the SOAP request, and processes the return document */
port.viewMyRolesQuery(admin_id,vmrq,statusHolder,resultHolder);
With the new release, the same code returns a value without the need for
a holder class. The status can now be queried directly:
ViewMyRolesQueryResult result = port.viewMyRolesQuery(admin_id,vmrq);
ImStatus imsStatus = result.getImStatus();
```

Public and Protected Context Tasks

All context information for TEWS tasks have been encapsulated into public and protected context types. These types are defined in the WSDL and are the first parameter for all tasks.

In previous releases, all tasks required the admin_id as part of the request message, regardless of whether they were public or protected. In this release, the WSDL does not define an admin_id attribute in request messages for public tasks. Therefore, admin_id is not required for public tasks, although it is still required for protected tasks. This may impact migrating customer code that currently sets the admin_id for public tasks.

In addition, each context type lists a number of optional attributes that apply to particular tasks. For example, the protected context includes workitem_id and action attributes which are expected for approval tasks.

Context Code Changes

The execution of a task in TEWS includes code that evaluates the information supplied in the context. Values that are required for a given task are checked, and any appropriate SOAP fault is generated.

If attributes that are not required are specified anyway, warnings are logged on the console and the values are ignored. This change allows for the future addition of context attributes without impacting the proxies that are generated.

Therefore, context changes require existing client code to be refactored to account for the context type that is now included in rebuilt proxies.

The following code example does not consider context:

```
EnableDisableUserSearchResult result =
searchPort.enableDisableUserSearch(strAdminDN, es);
Whereas migrated code must take the context into account:
TaskContext ctx = new TaskContext();
ctx.setAdmin_id(strAdminDN);
EnableDisableUserSearchResult result =
searchPort.enableDisableUserSearch(ctx, es);
```

Locators and Ports

In this release, the number of ports changes in the generated WSDL. In previous releases, a separate port was defined for each task. With the single WSDL, there is one port defined for the protected alias and one port defined for the public alias. Tasks are sorted into these two ports based on whether the task is public or protected. This means that with most proxies, the location of the web service can be changed with a single method call.

In general, to call an operation you now use code similar to the following example:

```
Tews6Locator locator = new Tews6Locator();
Tews6PortType port = locator.getPort();
/* access operations on port */
The same port can be used for multiple operations. Previous releases
required code similar to the following example, in which each task had
its own port:
Tews6Locator locator = new Tews6Locator();
```

```
ChangeMyPasswordPortType port = locator.getChangeMyPasswordPortType();
```

Update the web.xml File

After upgrading to Identity Manager r12, update the following two web.xml files:

- ../WebSphere/AppServer/profiles/profile_name/installedApps/Node_Name/IdentityMinder.ear/user_console.war/WEB-INF/web.xml
- ../WebSphere/AppServer/profiles/profile_name/config/cells/cell_name/applications/IdentityMinder.ear/deployments/IdentityMinder.ear/user_console.war/WEB-INF/web.xml

Modify the parameter value for IMeTASharedSecret to the etacallback shared secret value in your web.xml.bak file.

Example:

```
<servlet>
  <servlet-name>ETACallbackServlet</servlet-name>
  <display-name>eTA callback service Servlet</display-name>
  <servlet-class>
    com.netegrity.ims.etacallback.ETACallbackServiceServlet
  </servlet-class>
  <init-param>
    <param-name>IMeTASharedSecret</param-name>
    <param-value>XXXX</param-value>
  </init-param>
  <init-param>
    <param-name>JobTimeout</param-name>
    <param-value>0</param-value>
  </init-param>
</servlet>
```

Copy the JDBC Drivers

After upgrading from Identity Manager r8.1 to r12, copy the jdbc drivers to the application server. Copy the jar files to:

c:/IBM/WebSphere61/AppServer/lib

Note: The JDBC driver jars are located in the following location:

C:\Program Files\CA\IAM Suite\Identity Manager\tools\lib\jdbcdrivers

Add New Data Sources

Identity Manager r12 requires new data sources for all the databases used by the Identity Manager Server.

To add the new data sources

1. Create a new XA Provider. Depending on your database, use the following recommended Provider Types:
 - **SQL:** WebSphere embedded ConnectJDBC
 - **Oracle:** Oracle JDBC Driver
2. Using the WebSphere administrative console, create a new data source for each database using the following JNDI names:
 - Task Persistence: jdbc/idm
 - Workflow: jdbc/WPDS
 - Auditing: auditDbDataSource
 - Reporting: jdbc/reportsnapshot
 - Object Store: jdbc/objectstore
3. Provide the DatabaseName, User, and Password in the data source descriptor to the appropriate values for each new database.

The database schema (SQL scripts) will be automatically applied when you restart Identity Manager.
4. Depending on your database, add the following to Custom Properties:
 - **SQL:** user=<username>, password=<password>, enable2Phase=true, selectMethod=cursor
 - **Oracle:** user=<username>, password=<password>

Note: Ensure that the JDBC provider is created as XA.
5. Restart the application server.

Modify the RDB User Store

To modify an RDB user store for upgrade

1. If you are using a relational database user store, edit the generated `directory.xml` as follows:
 - a. Add the following element:
`<JDBC datasource=" userstore_jndi"/>`
 - b. Remove the `maxrows` attribute from the `DirectorySearch` element.
2. If you are using a relational database user store that supports Organizations, run the following script located in the `C:\Program Files\CA\IAM Suite\Identity Manager\tools\samples\NeteAutoRdb\Organization\` directory:
 - **SQL:** `mssql-orgpath-addon-upgrade-8-to-r12.sql`
 - **ORACLE:** `oracle-orgpath-addon-upgrade-8-to-r12.sql`

Update Existing Data Sources

All data sources in Identity Manager r12 must be XA-enabled. When upgrading from a previous version of Identity Manager, manually change the existing data sources to XA-enabled by removing the existing data source and creating a new data source that is XA-enabled with the same jndi name, and pointing to the same data source.

Update the Proxy Forwarder

Identity Manager r12 introduces a new CA styles EAR. To support this, change the web server plug-in that is used to forward to the application server, by adding a redirection to `/castylesr5.1.1` in addition to the `/idm` in the http proxy forwarder.

Upgrade Workflow

In Identity Manager r8.1 SP1, an updated version of WorkPoint Workflow was added to the installation. If you are upgrading from a version of Identity Manager prior to 8.1 SP1, you update the workflow database to work with WorkPoint 3.3 after upgrading to Identity Manager r12.

After updating the workflow database, you can continue to use the workflow processes that you developed in WorkPoint 3.2.

To upgrade workflow

1. Delete the Version 4 Data Source and create a new data source for workflow.

2. Convert the workflow database to the WorkPoint 3.3.2 schema:

- a. Log into the workflow database as the workpoint db user.
- b. Run wp32_to_wp33_cnv.sql.

This script is located in the following location:

C:\Program Files\CA\IAM Suite\Identity
Manager\tools\Workpoint\database\db_type

Note: If errors occur, use the wp32_to_wp33_cnv_undo.sql script to revert to the WorkPoint 3.2 database schema.

- c. Run the wp32_to_wp33_cnv_cleanup.sql script to clean up the database if no errors occurred when you ran wp32_to_wp33_cnv.sql.

After you run the cleanup script, you can no longer revert to the WorkPoint 3.2 database schema.

3. Run the wp330_to_wp331_cnv.sql script.

4. If you developed custom workflow scripts using the Workflow API in previous versions of Identity Manager, change all occurrences of ClientContextEJB to ClientContext.

If you have custom code that resembles the following:

```
public void approvalRequired(ClientContextEJB clientContext,  
                             SymbolTable symbolTable,  
                             JobData ThisJobData) throws Exception
```

change it as follows:

```
public void approvalRequired(ClientContext clientContext,  
                             SymbolTable symbolTable,  
                             JobData ThisJobData) throws Exception
```

5. If you developed custom workflow scripts using the Workflow API in previous versions of Identity Manager, the method signature to generate the workflow context has changed.

If you have custom code that resembles the following:

```
JobUserDataTable imsIdUD = job.getUserData("ims-id");  
    imsId = (String)imsIdUD.getVariableValue();  
WorkflowContext workflowContext = (new  
WorkflowCallbackHelper()).generateWorkflowContext(imsId);
```

change it as follows:

```
JobUserDataTable imsIdUD = job.getUserData("ims-id");  
    imsId = (String)imsIdUD.getVariableValue();  
    env0id = (String)job.getUserData("ime-id").getVariableValue();  
WorkflowContext workflowContext = (new  
WorkflowCallbackHelper()).generateWorkflowContext(imsId,env0id);
```

To verify that WorkPoint Workflow is configured correctly, log in into Identity Manager and execute tasks that are configured for workflow. You should see workitems and be able to approve them.

Upgrade Reporting

If you used reporting with an earlier version of Identity Manager, run the one of the following upgrade scripts on the Reporting Database:

- **MS SQL:**

```
C:\Program Files\CA\IAM Suite\Identity  
Manager\tools\imrexporth\db\sqlserver\ims_mssql_upgrade_6x_to_8.sql  
C:\Program Files\CA\IAM Suite\Identity  
Manager\tools\imrexporth\db\sqlserver\ims_mssql_upgrade_8_to_r12.sql
```

- **Oracle:**

```
C:\Program Files\CA\IAM Suite\Identity  
Manager\tools\imrexporth\db\oracle\ims_oracle_upgrade_6x_to_8.sql  
C:\Program Files\CA\IAM Suite\Identity  
Manager\tools\imrexporth\db\oracle\ims_oracle_upgrade_8_to_r12.sql
```

Note: If you have custom identifier files, put them in the following location:

IdentityMinder.ear\config\com\netegrity\config\imrexporth\sample

Configure the Provisioning Manager

Set up the Identity Manager Server and enable inbound synchronization in the Provisioning Manager.

To configure the Provisioning Manager

1. Go to Start, Programs, CA, Identity Manager, Provisioning Manager
2. Log in to the Provisioning Manager using the global username and password you provided while installing the Identity Manager Administrative Tools.
3. Click System.
4. Click Identity Manager Setup on the left.
5. Enter the hostname, port number and environment alias for the Identity Manager server.
6. Click Add.
7. Click Apply.

Note: If you get a shared secret error, re-enter the password under Shared Secret and Confirm Shared Secret and click Apply again.

8. Click Domain Configuration on the left.
9. Expand the Identity Manager Server folder and click Enable Notification.
10. Click Edit.

11. Change the value to Yes.
12. Click Apply.
13. Restart the Provisioning Server.

Recreate the Identity Manager Directory

In previous versions of Identity Manager, communication to the user stores was done through SiteMinder. In Identity Manager r12, user store communication is done through the application server. Also, the directory configuration information needs to be re-imported into the new object store.

LDAP User Stores

To recreate the directory configuration to an LDAP user store

1. In the Management Console, click Directories.
2. Click New.
3. Import the previously exported directory.xml to create a new Identity Manager Directory.
4. Click Next.
5. Verify the directory settings and click Finish.

The old directory is recreated for Identity Manager r12. Identity Manager uses standard JNDI to talk to all LDAP users stores, so no additional configuration is needed in the application server.

Note: For more information on creating new Identity Manager Directories, see the *Configuration Guide*.

RDB User Stores

To recreate the directory configuration to an RDB user store

1. Create the data source as follows:
 - a. Within the WebSphere administrative console, create a new userstore data source descriptor.
 - b. Change the JndiName in the data source descriptor to jdbc/userstore.

- c. Change the DatabaseName, User, and Password in the data source descriptor to the appropriate values for the userstore database.
- d. Depending on your database, do one of the following:
 - **SQL:** Ensure that the data source is XA, and create a new property for the data source called *enable2phase* and set it to true.
 - **Oracle:** Ensure that the data source is XA.
2. In the Management Console, click Directories.
3. Click New.
4. Import the previously exported directory.xml to create a new Identity Manager Directory.
5. Specify the JNDI name of the data source you created in Step 1.
6. Click Next.
7. Verify the directory settings and click Finish.

The old directory is recreated for Identity Manager r12.

Note: For more information on creating new Identity Manager Directories, see the *Configuration Guide*.

Recreate the Environment

Previously, Identity Manager objects, such as roles, tasks, and so on, were stored in the SiteMinder Policy Store. In r12, Identity Manager objects are stored in the object store. During the upgrade, this information needs to be imported to the object store using the Management Console.

To recreate the environment

1. In the Management Console, go to Environments.
2. Click on the Import button.
3. Browse for the following ZIP file created during the environment export:
ims_env_name.zip
4. Click Finish.

At this point, Identity Manager will recreate the environment and migrate task persistence data. Only *pending* tasks will be migrated.

Note: If the connection to your task persistence database goes down during the recreation of the environment, or your task persistence data is not completely migrated over to Identity Manager r12, you can use the Migrate Task Persistence Data from Identity Manager 8.1 button on the Environment page in the Management Console to restart the migration process. Restarting this process will not duplicate tasks that have already been migrated.

Additional New Feature Configuration

The following new features are optional and can be configured in Identity Manager r12.

Delegation

If you are upgrading from a previous version of Identity Manager, do the following:

- If you are upgrading from an earlier version of Identity Manager than r8.1 SP2, add the %DELEGATORS% wellknown attribute to the directory.xml file.
- If you are using an RDB user store, run the following script to update your user store database with the delegation table:
 - **SQL:** mssql-userdelegators-add-on.sql
 - **Oracle:** oracle-userdelegators-add-on.sql

These scripts can be found in the following locations:

C:\Program Files\CA\IAM Suite\Identity
Manager\tools\samples\NeteAutoRdb\Organization
C:\Program Files\CA\IAM Suite\Identity
Manager\tools\samples\NeteAutoRdb\NoOrganization

Template Method Workflow and Task-Level Workflow

To support template method workflow and task-level workflow, use the Workpoint archive tool to import the workflow upgrade scripts as follows:

1. In Workpoint Designer, click Import.

Workpoint Designer location: C:\Program Files\CA\IAM Suite\Identity
Manager\tools\Workpoint\bin
2. Navigate to C:\Program Files\CA\IAM Suite\Identity
Manager\tools\workflowScripts and select
81to12UpgradeWFScripts.zip.
3. Select one work item.
4. Click Import.

5. Answer the prompts as follows:
 - Are you importing in to empty DB tables: No
 - This import will: treat all objects as new objects
 - If Duplicate Name or reference is encountered: Rename the imported Name or Reference to be unique
6. Repeat Steps 3 through 5 for all work items.
7. Click Finish.

Note: Ensure that you have configured the WorkPoint Administrative Tools prior to running the Workpoint Designer. For more information on configuring the WorkPoint Administrative Tools, see the section on configuring workflow.

Roles and Tasks

In order to support new features in Identity Manager r12, such as reporting, scheduler, bulk loader, non-standard accounts, and so on, use the Management Console to import one of the following new role definitions files:

- C:\Program Files\CA\IAM Suite\Identity Manager\tools\RoleDefinitionUpdates\Upgrade-8.1-to-12-RoleDefinitions-NoOrganization.xml
- C:\Program Files\CA\IAM Suite\Identity Manager\tools\RoleDefinitionUpdates\Upgrade-8.1-to-12-RoleDefinitions-Organization.xml
- C:\Program Files\CA\IAM Suite\Identity Manager\tools\RoleDefinitionUpdates\Upgrade-8.1-to-12-RoleDefinitions-ProvisioningNoOrganization.xml
- C:\Program Files\CA\IAM Suite\Identity Manager\tools\RoleDefinitionUpdates\Upgrade-8.1-to-12-RoleDefinitions-ProvisioningOrganization.xml

Note: For more information on importing roledefinitions.xml files in the Management Console, see the *Configuration Guide*.

Install the Identity Manager r12 Bookshelf

For complete information about this product, install the Identity Manager r12 Bookshelf, so that you can do the following:

- Use a single console to view documents published for Identity Manager (including Provisioning).
- Use a single alphabetical index to find a topic in any document.
- Search all documents for one or more words.

To use the Bookshelf

1. Extract the contents of the ZIP file.
2. Choose one of the following methods:
 - Open the Bookshelf.hta file if the bookshelf is on the local system and you are using Internet Explorer.
 - Open the Bookshelf.html file if the bookshelf is on a remote system or if you are using Mozilla Firefox.

Note: The Identity Manager Bookshelf includes the release notes for this product. The release notes may contain additional installation and configuration information that was issued after publication of this guide.

Unattended Upgrades

To enable an unattended Identity Manager upgrade, upgrade the Identity Manager Server and the Provisioning components separately.

To perform an unattended installation of the Identity Manager Server, modify the settings in the im-installer.properties configuration file and run the installer against this file.

Note: For more information on the im-installer.properties configuration file, see the Unattended Installation section of this guide.

For Provisioning components, you can generate a response file with each of the installers, which can then be edited to perform unattended installations.

Identity Manager Server Unattended Upgrade

To upgrade the Identity Manager Server in unattended mode, run the Identity Manager installer against the im-installer.properties file with one of the following commands:

- **Windows:**
`ca-im-12.0-sp02-win32.exe -f im-installer.properties -i silent`
- **UNIX:**
`./ca-im-12.0-sp02-sol.bin -f im-installer.properties -i silent`

Note: For more information on the im-installer.properties configuration file, see the Unattended Installation section of this guide.

The following properties are needed in the configuration file for running the Identity Manager Server upgrade:

Weblogic 8 or 9

No input required.

JBoss

DEFAULT_JBOSS_FOLDER=location of JBOSS 4.0.5

WebSphere

If the Identity Manager r8.1 installer was run on the same system as the WebSphere application server the following properties are needed:

- DEFAULT_WEBSPHERE_FOLDER=location of WebSphere on the system
- DEFAULT_WAS_NODE=WebSphere node
- DEFAULT_WAS_SERVER=hostname of WebSphere server
- DEFAULT_WAS_CELL=WebSphere cell
- WAS_PROFILE=WebSphere profile
- DEFAULT_WAS_CLUSTER=WebSphere cluster name

Currently we do not support unattended upgrade when Identity Manager has been deployed manually to the WebSphere application server.

Note: Running the unattended installation for WebSphere will perform a fresh install instead of an upgrade.

Provisioning Components Unattended Upgrade

Locate the installer for the Provisioning component you want to upgrade on the Identity Manager installation media. The following parameters are supported by the Provisioning component installers:

-options-template *response_file_name*

Generates a template response file. This file lists the options available for the user to customize the install. It also contains the text that would be displayed during console install as comments in the response file.

-options-record *response_file_name*

Records the information entered into the user interface during an installation, and saves the information to a response file. This file can be used to perform an unattended installation. This is similar to -options-template except that the details of the response file are filled in and a full install is performed.

Once the response file is configured, use the following commands to invoke the Provisioning component installers in unattended mode:

Provisioning Directory

```
setup.exe -silent -options response_file_name
```

Provisioning Server

```
setup.exe -silent -options response_file_name
```

Provisioning Manager

```
setup.exe -silent -options response_file_name
```


Appendix A: Unattended Installation

This section contains the following topics:

[Modify the Configuration File](#) (see page 121)

[Configure Installation for Unattended Mode](#) (see page 121)

[Configuration File Format](#) (see page 126)

Modify the Configuration File

To enable an unattended Identity Manager installation, you modify the settings in the `im-installer.properties` configuration file using a text editor. The default parameters in the file reflect the information you entered during the initial Identity Manager installation. Change the default values as needed.

The file is located in the CA Identity Manager installation directory. The following is an example of the `im-installer.properties` file created during the initial Identity Manager installation.

Guidelines for File Modification

Follow these guidelines when modifying the configuration file:

- Make a back-up copy of the installer properties file before modifying the original, since the file holds all of the values you entered during the initial installation or configuration.
- Do not add extra spaces between the parameter name, the equals sign (=), and the attribute value.
- All directory names on Windows must contain either double back slashes or forward slashes, not single back slashes.

Configure Installation for Unattended Mode

To run the installer in the unattended installation mode

1. Modify the `im-installer.properties` file using the instructions in the following sections:
 - Initial Choices
 - Identity Manager Server

- Optional Component Configuration
 - Identity Manager Extensions to the Policy Server
2. Run the following command:
- **Windows:**
`ca-im-12.0-sp02-win32.exe -f im-installer.properties -i silent`
 - **UNIX:**
`./ca-im-12.0-sp02-sol.bin -f im-installer.properties -i silent`

Initial Choices

For basic installation choices, enter values for the following parameters:

Parameter	Instructions
DEFAULT_NEW_INSTANCE_DISPLAY_NAME	Enter 'New Installation' if this is a fresh install. For upgrades, this will be blank.
DEFAULT_COMPONENTS	Enter one or more components: ■ Server - Identity Manager Server ■ Exten - Identity Manager Extensions to the Policy Server ■ Admin - Identity Manager Administrative Tools ■ Provision - Provisioning Server ■ Directory - Provisioning Directory To install more than one component, separate components by a comma.
DEFAULT_INSTALL_FOLDER	Enter the directory in which to install the Identity Manager Server.
DEFAULT_GENERIC_USERNAME	Generic login information for Identity Manager components that are installed.
DEFAULT_GENERIC_PASSWORD	Generic password information for Identity Manager components that are installed.

The installation program ignores any parameters that do not apply to the component you are installing. For example, if you set `DEFAULT_COMPONENTS` to `Exten`, only the `DEFAULT_PS_ROOT` and `DEFAULT_USE_SITEMINDER` parameters are used.

Identity Manager Server

If you plan to install the Identity Manager server, enter values for the following parameters:

Parameter	Instructions
<code>DEFAULT_APP_SERVER</code>	Enter, Weblogic, WebSphere, or JBoss
<code>DEFAULT_APP_SERVER_URL</code>	Enter full URL of the application server hosting Identity Manager, including the port.
<code>DEFAULT_CONFIG_IREC</code>	Enter true to install Identity Manager iRecorder.
<code>DEFAULT_IROUTER_NON_LOCAL</code>	Enter true if the iRecorder router is installed on a remote system.
<code>DEFAULT_IREC_ROUTER_LOC</code>	Enter location of remote iRecorder system.
<code>DEFAULT_FIPS_MODE</code>	Enter true if you want to install with FIPS 140-2 Compliance.
<code>DEFAULT_JAVA_HOME</code>	Path to JRE or JDK for Identity Manager.
Additional Database Parameters	
<code>DEFAULT_DB_HOST</code>	Enter the hostname of the system hosting the Identity Manager database.
<code>DEFAULT_DB_PORT</code>	Enter the port of the system hosting the Identity Manager database.
<code>DEFAULT_DB_NAME</code>	Enter the name of the Identity Manager database.
<code>DEFAULT_DB_USER</code>	Enter the administrative username for the Identity Manager database.
<code>DEFAULT_DB_PASSWORD</code>	Enter the password for the administrative user of the Identity Manager database.

Parameter	Instructions
DEFAULT_DB_TYPE	Enter the type of database used for the Identity Manager database.
Additional JBoss Parameter	
DEFAULT_JBOSS_FOLDER	Enter the full pathname of the directory where you installed the JBoss application server. For example, C:\Program Files\jboss-4.0.5
Additional WebLogic Parameters	
DEFAULT_BINARY_FOLDER	Enter the full directory path of the directory where you installed WebLogic. For example: C:\bea\weblogic81\
DEFAULT_DOMAIN_FOLDER	Enter the full path and directory name for the WebLogic domain you created for Identity Manager.
DEFAULT_SERVER_NAME	Enter the name of the WebLogic server instance you created for use with Identity Manager.
DEFAULT_BEA_CLUSTER	(WebLogic 9) Enter the cluster name for the WebLogic cluster.
Additional WebSphere Parameter	
DEFAULT_WEBSPHERE_FOLDER	Enter the full pathname of the directory where you installed Identity Manager Tools for WebSphere.
DEFAULT_WAS_NODE	Enter the name of the node in which the application server is located.
DEFAULT_WAS_SERVER	Enter the name of the system on which the application server is running.

Parameter	Instructions
DEFAULT_WAS_CELL	Enter the name of the cell in which the application server is located.
WAS_PROFILE	(WebSphere 6) Enter the location of the WebSphere profile files.
DEFAULT_WAS_CLUSTER	(WebSphere 6) Enter the cluster name for the WebSphere cluster.
If you are using a SiteMinder Policy Server, enter the following:	
Parameter	Instruction
DEFAULT_PS_HOST	Enter the fully-qualified domain name of the Policy Server.
DEFAULT_PS_USER	Enter the user name of the Policy Server administrator.
DEFAULT_PS_PW	Enter the password of the Policy Server administrator.

Optional Component Configuration

If you install the iRecorder, enter the following:

Parameter	Instructions
DEFAULT_IREC_ROUTER_LOC	If you are installing Identity Manager iRecorder, enter the hostname or IP address of the iRouter used by SCC or eTrust Audit.
If you install Provisioning, enter the following:	
Parameter	Instruction
DEFAULT_CONFIG_REMOTE PROVISIONING	Enter true if you are connecting to a remote Provisioning Directory.

Parameter	Instruction
DEFAULT_DOMAIN_NAME	Enter IDENTITY_MANAGER unless you have an existing Provisioning domain.
DEFAULT_DIRECTORY_HOST	Enter the hostname of the system with Provisioning Directory installed.
DEFAULT_DIRECTORY_PORT	Enter the port number of the system with the Provisioning Directory installed.
DEFAULT_DIRECTORY_PASSWORD	Enter the password for the Provisioning Directory.

Identity Manager Extensions to the Policy Server

To install the Identity Manager extensions to a SiteMinder Policy Server, enter this parameter:

Parameter	Instruction
DEFAULT_PS_ROOT	(Solaris Only) Enter the directory where the Policy Server is installed.
DEFAULT_USE_SITEMINDER	Enter true if you are using a SiteMinder Policy Server in your implementation.

Configuration File Format

Below is an example of the im-installer.properties configuration file:

```
#####  
### Silent input properties file for the IMR12 installer ##  
#####  
  
#INSTANCE DISPLAY NAME  
# For fresh installation it will always be 'New Installation'  
# For Upgrade NEW_INSTANCE_DISPLAY_NAME will be equal to INSTANCE_NAME  
DEFAULT_NEW_INSTANCE_DISPLAY_NAME=New Installation
```

```
#INSTANCE NAME
#   Instance name for IAM Suite provided in the Main product installer
#DEFAULT_INSTANCE_NAME=Identity Manager

# Complete install
#   If this is true, component selection (below) is ignored.
#DEFAULT_COMPLETE_INSTALL=false

# Component list
#   Valid values (comma-separated, one or more):
#   Server, Exten, Admin, Provision, Directory
#DEFAULT_COMPONENTS=Server, Admin

# Install folder
#   All products are installed in subfolders under this folder
#   This is parent product root selected by the user
#   For e.g. C:\\\\Program Files\\\\CA
#DEFAULT_INSTALL_FOLDER=C:\\Program Files\\CA

#Generic login information
#DEFAULT_GENERIC_USERNAME=imuser
#DEFAULT_GENERIC_PASSWORD=<For silent install, insert generic user password here
#and uncomment line.>

# Provisioning Server and Provisioning Directory Information.
#   Configure the Provisioning Server to a remotely installed Provisioning
#   Directory(true/false)
#DEFAULT_CONFIG_REMOTE_PROVISIONING=false

#DEFAULT_DOMAIN_NAME=IDENTITY_MANAGER
#DEFAULT_DIRECTORY_HOST=
#DEFAULT_DIRECTORY_PORT=

#DEFAULT_DIRECTORY_BINDDN=eTDSAContainerName=DSAs,eTNamespaceName=CommonObjects,d
#c=etadb
#DEFAULT_DIRECTORY_PASSWORD=<For silent install, insert password to be used with
#Provisioning Components here and uncomment line.>

#FIPS 140-2 Compliance mode (true/false) for Provisioning Manager and
#Provisioning Server
#DEFAULT_FIPS_MODE=true

#Identity Manager Application Server information
#   App Server
#   Valid values: JBoss, WebSphere, WebSphere6, WebLogic8, WebLogic9
#DEFAULT_APP_SERVER=WebLogic8
```

```
#Application Server Host: This value will be derived from APP_SERVER_URL by
removing the port appended to it
#   For e.g. http://machine.domain
#DEFAULT_APP_SERVER_HOST=http://iam-fw-wl8.ca.com

#Application Server Port: This value will be derived from APP_SERVER_URL by
removing the hostname from it
#DEFAULT_APP_SERVER_PORT=7001

DEFAULT_APP_SERVER_URL=http://iam-fw-wl8.ca.com:7001

#Path to JDK/JRE for the Application Server
#   For JBoss this has to be path to JDK and for WebLogic, Websphere it is path
to JRE or JDK
DEFAULT_JAVA_HOME=C:\\Program Files\\Java\\jre1.5.0_11

#JBoss info
DEFAULT_JBOSS_FOLDER=C:\\jboss

#Weblogic info
DEFAULT_BINARY_FOLDER=C:\\bea\\weblogic81
DEFAULT_DOMAIN_FOLDER=C:\\bea\\user_projects\\domains\\mydomain
DEFAULT_SERVER_NAME=myserver
#WEBLOGIC_DOMAIN=mydomain
#WEBLOGIC_FOLDER value will be containing the value of C:\\bea
#DEFAULT_WEBLOGIC_FOLDER=C:\\bea
#For Weblogic9 only:
DEFAULT_BEA_CLUSTER=

#WebSphere info
DEFAULT_WEBSPHERE_FOLDER=C:\\websphere

#WAS_NODE Location: \\installedApps\\node name
#   and directory \\config\\cells\\nodes\\node name
DEFAULT_WAS_NODE=node name

#WAS_SERVER Value: \\config\\cells\\cell name\\nodes\\node name\\servers\\server1
DEFAULT_WAS_SERVER=server1

#WAS_CELL: \\config\\cells\\cell name
DEFAULT_WAS_CELL=cell name

#WebSphere 6 Only:
#   WAS_PROFILE = \\profiles\\
WAS_PROFILE=
```

```
#WebSphere 6 Only:
#WAS_CLUSTER: \\config\\cells\\cell name\\clusters\\
DEFAULT_WAS_CLUSTER=

#Policy Server info
DEFAULT_PS_HOST=localhost
DEFAULT_PS_USER=SiteMinder
#DEFAULT_PS_PW=<For silent install, insert PS Admin user password here and
uncomment line.>
#DEFAULT_AGENT_NAME=imuser
#DEFAULT_AGENT_PW=

#Policy Server Extensions info
#   Location of CsSmPs-<Instance name> folder
DEFAULT_PS_ROOT=
#PS_MANAGED=true
DEFAULT_USE_SITEMINDER=false

#Path to JRE or JDK for Policy Server
#DEFAULT_NETE_JRE_HOME=

#iRecorder info
#   Set to true if you want iRecorder to be installed
DEFAULT_CONFIG_IREC=true
#   iRouter is Local or Not
DEFAULT_IROUTER_NON_LOCAL=true
#   iRouter location - if not local
DEFAULT_IREC_ROUTER_LOC=testirec.com

#Admin Tools info
#DEFAULT_ADMIN_FOLDER=C:\\bea\\user_projects\\domains\\mydomain\\applications\\Id
entityMinder.ear\\IAM Suite

#Database Info
DEFAULT_DB_HOST=localhost
DEFAULT_DB_PORT=1433
DEFAULT_DB_NAME=fwstore
DEFAULT_DB_USER=fwadmin
#DEFAULT_DB_PASSWORD=<For silent install, insert database password here and
uncomment line.>
DEFAULT_DB_TYPE=mssql2005
#DEFAULT_INITIALIZEDB_SELECTED=1
```


Appendix B: Creating a New Database

This section contains the following topics:

[How to Create a New Database Instance](#) (see page 131)

[Create an MS SQL Server Database Instance](#) (see page 132)

[Create an Oracle Database Instance](#) (see page 132)

[Edit the Data Source](#) (see page 133)

[Run the SQL Scripts](#) (see page 133)

How to Create a New Database Instance

When installing Identity Manager, all of the database schemas are created automatically.

For scalability purposes, you may want to create a new, separate database to replace any one of the existing database schemas initially created by Identity Manager. You can create a new database instance for the following:

- Workflow
- Auditing
- Task Persistence
- Object Store
- Reporting

Perform the following steps to create a new database:

1. Create a new database instance for Identity Manager as follows:
 - MS SQL
 - Oracle
2. Edit the data source.
3. (Optional) Run the SQL scripts.

Create an MS SQL Server Database Instance

To create an MS SQL Server Database Instance

1. Create a database instance in SQL server.
2. Create a user and grant this user the necessary rights (such as public and db_owner rights) to the database by editing the properties of the user.

Note: The user must have at least select, insert, update, and delete permissions for all of the tables created by the .sql script for creating the database, and must be able to execute all of the stored procedures (if applicable) defined in these scripts.

For example, the user must have these permissions on the tables defined in:

```
C:\Program Files\CA\IAM Suite\Identity  
Manager\tools\db\taskpersistence\sqlserver\idm_db_sqlserver.sql
```

3. While editing the user's properties, set the database you just created as the default database for the user.
4. Ensure the Authentication setting has a value of SQL Server or Windows on the Security tab of the SQL Server Properties dialog for the server where the database is installed.

Note: For complete information about MS SQL, see your MS SQL documentation.

Create an Oracle Database Instance

To create an Oracle Database Instance

1. Create a new tablespace.
2. Create a new user.
3. Grant the new user rights to the new database.
4. Give DBA rights to the user.

Note: For complete information about Oracle, see your Oracle documentation.

Edit the Data Source

Important! When using WebSphere with MS SQL 2005, [enable XA transactions](#) (see page 137). Identity Manager needs an XA data source for the database transactions to work properly.

To edit the data source

1. Within the WebSphere administrative console, open the appropriate data source descriptor.
2. Change the JndiName in the data source descriptor according to the following:
 - Task Persistence: jdbc/idm
 - Workflow: jdbc/WPDS
 - Auditing: auditDbDataSource
 - Reporting: jdbc/reportsnapshot
 - Object Store: jdbc/objectstore

3. Change the DatabaseName, User, and Password in the data source descriptor to the appropriate values for the new database.

The database schema (SQL scripts) will be automatically applied when you restart Identity Manager.

4. Depending on your database, add the following to Custom Properties:
 - **SQL:** user=<username>, password=<password>, enable2Phase=true, selectMethod=cursor
 - **Oracle:** user=<username>, password=<password>

Note: Ensure that the JDBC provider is created as XA.

Run the SQL Scripts

SQL scripts are automatically run against the databases when Identity Manager starts, however if you want to run the SQL scripts yourself, perform the following steps before restarting the application server:

These scripts are installed with the Identity Manager Administrative Tools.

To run the SQL scripts

1. Do one of the following:
 - MS SQL Server: Open the Query Analyzer tool and select the script you need.
 - Oracle: Open the SQL prompt for the script you need.
2. Select one of the following scripts depending on what the database was created for:
 - Task Persistence:
 - MS SQL: C:\Program Files\CA\IAM Suite\Identity Manager\tools\taskpersistence\sqlserver\idm_db_sqlserver.sql
 - Oracle: C:\Program Files\CA\IAM Suite\Identity Manager\tools\taskpersistence\oracle9i\idm_db_oracle.sql
 - Workflow: Run the CreateDatabase script.
 - Auditing:
 - MS SQL: C:\Program Files\CA\IAM Suite\Identity Manager\tools\db\auditing\sqlserver\ims_mssql_logs.sql
 - Oracle: C:\Program Files\CA\IAM Suite\Identity Manager\tools\db\auditing\oracle\ims_oracle_logs.sql
3. Run the script file.

To verify that the database instance is correctly configured, check the database tables for Identity Manager objects that begin with the letters idm.

Run the CreateDatabase Script for Workflow

Identity Manager includes SQL scripts for setting up a new workflow database instance.

To run the CreateDatabase script

1. Add the path to the sqljdbc.jar to the DB_CLASSPATH attribute in the CreateDatabase.bat or .sh script before you run it.
2. From a command prompt, run the C:\Program Files\CA\IAM Suite\Identity Manager\tools\Workpoint\install\CreateDatabase.bat or sh.
A command prompt window and the WorkPoint application open.
3. Select the database type from the drop-down.

4. Use the following guidelines to fill in fields in the configuration utility:

- For the JDBC Class parameter, enter:

Oracle: oracle.jdbc.driver.OracleDriver

SQL Server: com.microsoft.jdbc.sqlserver.SQLServerDriver

SQL Server 2005: com.microsoft.sqlserver.jdbc.SQLServerDriver

- For the JDBC URL, enter:

Oracle: jdbc:oracle:thin:@wf_db_systemName:1521:wf_oracle_SID

SQL Server: jdbc:microsoft:sqlserver://wf_db_systemName:1433;
databaseName=wf_db_name

SQL Server 2005: jdbc:sqlserver://wf_db_systemName:1433;
databaseName=wf_db_name

- For the Database User ID parameter, enter the workflow user you created when creating the workflow database.
- For the Password parameter, enter the password you created for the workflow user.
- For the Database ID, enter WPDS

5. Accept the default check box selections.

6. Click the Initialize button.

When the configuration is complete, a message that resembles the following appears in the Command Prompt window:

The create database process finished with 0 errors.

7. Restart the application server.

Appendix C: Enabling XA on MS SQL 2005

This section contains the following topics:

[How to Enable XA on MS SQL 2005](#) (see page 137)

[Confirm the Distributed Transaction Coordinator is Started](#) (see page 137)

[Install Stored Procedures for JTA](#) (see page 138)

[Create a New Registry-Named Value](#) (see page 138)

[Enable XA Transactions](#) (see page 139)

How to Enable XA on MS SQL 2005

When using WebSphere with MS SQL 2005, enable XA transactions. Identity Manager needs an XA data source for the database transactions to work properly.

To enable XA, perform the following steps on the SQL Server system:

1. [Confirm that the Distributed Transaction Coordinator service is running.](#) (see page 137)
2. [Install the stored procedures for the Java Transaction API \(JTA\)](#) (see page 138).
3. [Create a new registry-named value](#) (see page 138).
4. [Enable XA transactions](#) (see page 139).

Confirm the Distributed Transaction Coordinator is Started

Perform the following procedure on each system where MS SQL Server is installed.

To confirm the Distributed Transaction Coordinator service is running

1. Go to Start, Control Panel, Administrative Tools, Services.
2. Verify that the Distributed Transaction Coordinator (DTC) is started.
3. If the DTC is not started, start the DTC service.

Install Stored Procedures for JTA

Perform the following procedure on each MS SQL Server instance.

To install the stored procedures for JTA

1. Download the Connect JDBC driver 3.4 (Connect 3.4) from the following URL:
`ftp://ftp.software.ibm.com/software/websphere/info/tools/DataDirect/datadirect.htm`
2. Stop the MS SQL 2005 Server service.
3. Copy the `sqljdbc.dll` file into `sqlserver_install\Binn`
where `sqlserver_install` is the folder where MS SQL Server is installed.
4. Restart the MS SQL Server service.
5. Run the `instjdbc.sql` script.

The `instjdbc.sql` script can be run by the MS SQL Management Studio or the ISQL utility.

Note: The first time you run this script, you can expect to see errors about removing stored procedures.

Create a New Registry-Named Value

To create a new registry-named value

1. Using the Registry Editor, navigate to the following registry key:
`HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\MSDTC\XADLL`
2. Go to Edit, New, String Value.
3. Create a new registry-named value with the following parameters:

Name: `sqljdbc.dll`

Type: String (REG_SZ)

Value: `sqlserver_install\Binn\sqljdbc.dll`

sqlserver_install

Specifies the MS SQL Server installation location.

Enable XA Transactions

To enable XA transactions

1. Go to Start, Control Panel, Administrative Tools, Component Services.
2. Under Computers, navigate to the system where you want to enable XA transaction support.
3. Right click the system name, click Properties.
4. Under the MSDTC tab, click Security Configuration.
5. Select the check box for Enable XA Transactions.
6. Click Ok.
7. (Optional) If you have a database cluster, repeat Step 2 for every SQL server in the cluster.

Appendix D: Installation Worksheet

This section contains the following topics:

[Collect Information for an Identity Manager Installation](#) (see page 141)

Collect Information for an Identity Manager Installation

Use the following worksheets to collect information about your system before installing Identity Manager.

WebSphere Information

Record the following WebSphere information you need during the Identity Manager installation:

Field Name	Description	Your Response
WebSphere Install Folder	The location of the application server home directory.	
Server Name	The name of the system on which the application server is running.	
Profile Name	The name of the profile you want to use for Identity Manager.	
Cell Name	The name of the cell in which the application server is located.	
Node Name	The name of the node in which the application server is located.	

Field Name	Description	Your Response
Cluster Name	The cluster name for high-availability implementations. This is only needed if you plan on installing Identity Manager in a clustered environment. Note: For more information on clustering, see the <i>High Availability Guide</i> .	
App Server URL and port	The application URL and port number of the system that will host the Identity Manager Server (system that will host the application server).	

Provisioning Information

Record the following Provisioning Directory information you need during the Identity Manager installation:

Field Name	Description	Your Response
Host	The hostname of the remote Provisioning Directory system.	
Port	The port number of a remote Provisioning Directory system.	
User Password	The remote Provisioning Directory user password.	
Domain Name	The domain name for the Provisioning Directory. This is required for both local and remote Provisioning Directory installations. Default: IDENTITY_MANAGER Note: You should not change the domain unless you are connecting to an existing domain.	

Database Information

Record the following database information you need during the Identity Manager installation:

Field Name	Description	Your Response
Database Type	The database type (vendor/version) of the database created for task persistence, workflow, audit, reporting, and object storage.	
Host Name	The hostname of the system where the database is located. Note: Ensure you provide a hostname and <i>not</i> an IP address.	
Port Number	The port number of the database.	
SID/Database Name	The database identifier.	
Username	The username for database access. Note: This user must have administrative rights to the database.	
Password	The password for the user account with administrative rights.	

iRecorder Information

Record the following iRecorder information you need during the Identity Manager installation:

Field Name	Description	Your Response
Host name or IP of Audit Client or iRouter	The hostname or IP address of the iRouter used by CA Security Command Center or CA Audit.	

SiteMinder Information

Record the following SiteMinder Policy Server information you need during the Identity Manager installation:

Field Name	Description	Your Response
Policy Server Host Name	The hostname of the SiteMinder Policy Server.	
SiteMinder Administrator Name	The administrator username for the SiteMinder Policy Server.	
SiteMinder Administrator Password	The administrator user password for the SiteMinder Policy Server.	
SiteMinder Folder (Solaris Only)	The location of SiteMinder on the system with a SiteMinder Policy Server installed.	

Important! When installing Identity Manager with SiteMinder, the installation does not prompt the user for the Web Agent name. Instead, the installer refers to the generic username as the agent name and the generic password as the agent shared secret. To connect to an existing SiteMinder deployment with set agent credentials, edit the ra.xml file under the "IdentityMinder.ear\policyserver.rar\META-INF" folder and set the AgentName and AgentSecret properties to the correct values.

Reporting Information

Record the following information you need during the Report Server installation:

Field Name	Description	Your Response
Administrator Password	Defines the password to log in to the Business Objects Infoview console.	
User Name	Identify the username for the Reporting Database.	
Password	Identify the administrative password credentials for the Report Database.	

Field Name	Description	Your Response
Pre-Installed Tomcat Information	Identify the path and port numbers for any previous installation of Tomcat. If you do not want to use a previous installation of Tomcat, Report Server installer can install Tomcat.	
Tomcat Port Number	The Tomcat connection, redirect, and shutdown ports. Note: If you are installing the Report Server on the same system as the Identity Manager, ensure that the Tomcat connection port does not conflict with the port number you specified for the application server URL when installing CA Identity Manager.	

Appendix E: Installation Checklists

Use the following checklists in this appendix in the order they appear to help you install and configure Identity Manager. You may want to print the checklists and check off the steps as you complete them.

This section contains the following topics:

[How to install Prerequisite Components](#) (see page 145)

[How to Install Identity Manager Components](#) (see page 146)

[How to Start Identity Manager](#) (see page 146)

[How to Protect Identity Manager with SiteMinder](#) (see page 147)

[How to Configure Provisioning](#) (see page 147)

[How to Configure Email Notification](#) (see page 148)

[How to Configure Workflow](#) (see page 148)

[How to Install Reporting](#) (see page 148)

[How to Configure Internationalization](#) (see page 149)

[How to Uninstall Identity Manager](#) (see page 149)

How to install Prerequisite Components

To install the prerequisite hardware and software for Identity Manager:

 Step
1. Confirm that the system that will host Identity Manager satisfies the hardware requirements.
2. Review the software prerequisites for Identity Manager.
3. Create a database for Identity Manager.
4. Confirm that the application server that will host Identity Manager is installed and configured correctly.

How to Install Identity Manager Components

Use the following checklist to install the components of Identity Manager:

✓	Step
	1. Gather information needed for the installation program.
	2. Check if any Identity Manager Cumulative Releases exist.
	3. Review important notes prior to the Identity Manager installation.
	4. Install the Identity Manager components.
	5. Install the Identity Manager Bookshelf.

Important! If you are going to use SiteMinder, see the chapter on Protecting Identity Manager with SiteMinder and follow the steps to configure SiteMinder to work with Identity Manager.

How to Start Identity Manager

After you install the Identity Manager software components, perform the following steps to start the Identity Manager Server for the first time:

Step
1. Start the Identity Manager Server.
2. Confirm that Identity Manager started correctly.

How to Protect Identity Manager with SiteMinder

The following table describes the steps involved in protecting Identity Manager resources:

 Step
1. Install and configure a SiteMinder Agent to protect Identity Manager resources.
2. Install the plug-in the Web Server uses to forward requests to the application server.
3. Verify that the plug-in is successfully forwarding requests to the application server.
4. Configure the SiteMinder Policy Store for use with Identity Manager.

How to Configure Provisioning

Perform the following steps to configure Identity Manager provisioning:

Step
1. If your Provisioning Server is remote (not on the same system as the Provisioning Manager), run the Provisioning Manager setup.
2. Configure the Identity Manager Server and notifications within the Provisioning Manager.
3. Consider optional Provisioning Components to install.

How to Configure Email Notification

The following checklist describes the steps to configure Identity Manager's email notification feature:

 Step
1. Configure SMTP for the application server.
2. Enable email notification through the Management Console

How to Configure Workflow

The following checklist describes the steps to configure Identity Manager's workflow feature:

 Step
1. Enable workflow in the Management Console
2. (Optional) Configure WorkPoint Administrative Tools if you plan to use WorkPoint Designer.

How to Install Reporting

The following checklist describes the steps to install Identity Manager's reporting feature:

 Step
1. Review the report pre-installation checklist.
2. Gather reporting information.
3. Open ports required by the Report Server.
4. Install the Report Server
5. Run the Registry Script.

**Step**

4. Copy the JDBC JAR files.

5. Deploy the default reports.

Note: For more information on configuring reporting after the installation, see the *Administration Guide*.

How to Configure Internationalization

To configure Identity Manager for internationalization, complete the following steps:

**Step**

1. Confirm that the system hosting Identity Manager satisfies the prerequisites.

2. (Optional) Configure the SiteMinder Web Agent for Internationalization.

How to Uninstall Identity Manager

The following checklist describes the steps to uninstall Identity Manager:

**Step**

1. Delete Identity Manager objects from the policy store.

2. (Optional) Remove the Identity Manager schema from the policy store.

3. Uninstall the Identity Manager components.

4. Remove Identity Manager configuration information from the application server.

Appendix F: Changing the WorkPoint RMI Port

The WorkPoint General Monitor implements certain WorkPoint features, such as delay node processing, asynchronous script processing, alert monitoring, and email generation. The port number for the General Monitor RMI connection is specified in several locations.

To change the settings, modify the following properties files:

Properties File	Location	Setting
GeneralMonitor.properties	<i>IdentityMinder.ear</i> \\APP-INF\\classes	RMI_Port
LicenseServer.properties	<i>IdentityMinder.ear</i> \\APP-INF\\classes	rmi.port
workpoint-client.properties	<i>IdentityMinder.ear</i> \\APP-INF\\classes	license.port
workpoint-server.properties	<i>IdentityMinder.ear</i> \\ wpServer.jar	license.port

Note: To modify the workpoint-server.properties, extract the file from the wpServer.jar, change the license.port setting, and add the properties file to the .jar file.

In this table, *IdentityMinder.ear* is the installed location of IdentityMinder.ear directory. For example, the Windows default is:

C:\\Program Files\\CA\\IAM Suite\\Identity Manager\\tools\\WebSphere-ear\\IdentityMinder.ear

Index

A

- Access the Identity Manager Support Matrix • 22
- Add New Data Sources • 109
- Additional New Feature Configuration • 115
- Advanced Configuration • 39

B

- Basic Installation • 11

C

- CA Product References • iii
- Changing the WorkPoint RMI Port • 151
- Check for Identity Manager Cumulative Releases • 30
- Collect Information for an Identity Manager Installation • 141
- Configuration File Format • 126
- Configure a Relational Database • 47
- Configure a Web Agent • 98
- Configure eTrust Directory Server • 50
- Configure Installation for Unattended Mode • 121
- Configure Microsoft Active Directory • 48
- Configure Microsoft ADAM • 50
- Configure Novell eDirectory Server • 52
- Configure Oracle Internet Directory (OID) • 52
- Configure SMTP Settings • 62
- Configure Sun Java Systems Directory Server or IBM Directory Server • 48
- Configure the Policy Store for Identity Manager • 47
- Configure the Provisioning Manager • 57, 112
- Configure the SiteMinder Web Agent • 85
- Configure WorkPoint Administrative Tools • 66
- Configuring Email Notification • 61
- Configuring Internationalization • 83
- Configuring Provisioning • 55
- Configuring Workflow • 65
- Confirm the Distributed Transaction Coordinator is Started • 137
- Connectors • 59
- Contact CA • iii

- Copy Custom Files Back into Identity Manager EAR • 104
- Copy the JDBC Drivers • 108
- Copy the JDBC JAR Files • 79
- Create a Database • 22
- Create a New Registry-Named Value • 138
- Create an MS SQL Server Database Instance • 132
- Create an Oracle Database Instance • 132
- Create Language-Specific Tasks and Roles • 85
- Creating a New Database • 131

D

- Database Information • 28, 142
- Demonstration Environments • 34
- Deploy Default Reports • 80

E

- Edit init.bat/init.sh • 67
- Edit the Data Source • 133
- Edit workpoint-client.properties • 67
- Enable Email Notification • 63
- Enable Workflow • 66
- Enable XA Transactions • 139
- Enabling XA on MS SQL 2005 • 137
- Export the Directories and Environments • 102

G

- Gather Information for Provisioning Server Upgrade • 95
- Gather Information for the Installation • 26
- Guidelines for File Modification • 121

H

- Hardware Requirements • 21, 71
- High Availability • 59
- How Resources are Protected • 42
- How to Configure Email Notification • 62, 148
- How to Configure Internationalization • 84, 149
- How to Configure Provisioning • 56, 147
- How to Configure Workflow • 65, 148
- How to Create a New Database Instance • 131
- How to Enable XA on MS SQL 2005 • 137

- How to Install Identity Manager Components • 26, 146
- How to install Prerequisite Components • 20, 145
- How to Install Reporting • 72, 148
- How to Protect Identity Manager with SiteMinder • 42, 147
- How to Start Identity Manager • 38, 146
- How to Uninstall Identity Manager • 88, 149
- How to Uninstall the Report Server • 81
- How to Upgrade to Identity Manager r12 • 93

I

- Identity Manager Components • 26
- Identity Manager Extensions to the Policy Server • 126
- Identity Manager Prerequisites • 19
- Identity Manager Server • 123
- Identity Manager Server Unattended Upgrade • 117
- Important Notes for Installation • 30
- Important Notes for Provisioning Installation • 56
- Initial Choices • 122
- Install a WebSphere Application Server • 23
- Install Additional Components • 35
- Install Identity Manager Components • 32
- Install Stored Procedures for JTA • 138
- Install the CA Report Server • 75
- Install the Identity Manager Bookshelf • 36
- Install the Identity Manager r12 Bookshelf • 116
- Install the Proxy Plug-In • 45
- Install the SiteMinder Web Agent • 43
- Installation Checklists • 145
- Installation Log Files • 31
- Installation Overview • 11
- Installation Process • 17
- Installation Status • 19, 25, 37, 41, 55, 61, 65, 69, 83
- Installation with Provisioning Components • 13
- Installation with SiteMinder Policy Server • 15
- Installation Worksheet • 17, 141
- Installing Identity Manager Components • 25
- Installing Reporting • 69
- Internationalization Prerequisites • 84
- iRecorder Information • 29, 143

J

- Java Connector Server • 58

L

- LDAP User Stores • 113

M

- Modify the Configuration • 103
- Modify the Configuration File • 121
- Modify the RDB User Store • 110

O

- Open Ports for the Report Server • 74
- Optional Component Configuration • 125
- Optional Provisioning Components • 58

P

- Prerequisite Knowledge • 20
- Prerequisite Steps For WebSphere • 101
- Production Environments • 33
- Protecting Identity Manager with SiteMinder • 41
- Provisioning Components Unattended Upgrade • 118
- Provisioning Information • 27, 142
- Provisioning Manager Setup • 57

R

- RDB User Stores • 113
- Recreate the Environment • 114
- Recreate the Identity Manager Directory • 113
- Reinstall Identity Manager • 87
- Reinstalling and Uninstalling Identity Manager • 87
- Remove Identity Manager from WebSphere • 91
- Remove Identity Manager Objects with the Management Console • 88
- Remove Leftover Items • 82
- Remove the Identity Manager schema from a LDAP Policy Store • 89
- Remove the Identity Manager schema from a SQL Policy Store • 89
- Remove the Identity Manager Schema from the Policy Store • 88
- Remove UNIX Items • 82
- Remove Windows Items • 82
- Reporting Architecture • 70

Reporting Considerations • 71
Reporting Information • 74, 144
Reports Pre-Installation Checklist • 72
Restrictions on the Use of International
Character Sets • 86
Run the CreateDatabase Script for Workflow •
134
Run the Registry Script • 78
Run the SQL Scripts • 133
Run the UNIX Installer • 76
Run the Windows Installer • 75

S

Sample Identity Manager Installations • 11
Silent Installation • 81
SiteMinder Information • 29, 143
Software Requirements • 21
Start the Identity Manager Server • 38
Starting Identity Manager • 37

U

Unattended Installation • 121
Unattended Upgrades • 117
Uninstall Identity Manager • 87
Uninstall Identity Manager Software
Components • 90
Update Existing Data Sources • 110
Update the Provisioning Directory Schema • 94
Update the Proxy Forwarder • 110
Update the web.xml File • 108
Upgrade Connectors • 97
Upgrade from r8.1 TEWS Changes • 105
Upgrade Other Provisioning Components • 97
Upgrade Provisioning Server Components • 94
Upgrade Reporting • 112
Upgrade TEWS • 104
Upgrade the Application Server • 99
Upgrade the Identity Manager Server • 98, 101
Upgrade the Provisioning Server • 95
Upgrade Workflow • 110
Upgrading to Identity Manager r12 • 93

V

Verify that Identity Manager Started • 39
Verify the Policy Store • 53
Verify the Reporting Installation • 81
Verify the Web Agent and Connector • 46
Verify the WebSphere Application Server • 24

W

WebSphere Application Server • 23
WebSphere Information • 27, 141